

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 2, Township 38, Range 30  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-21-08 found a CAST IRON MONUMENT

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

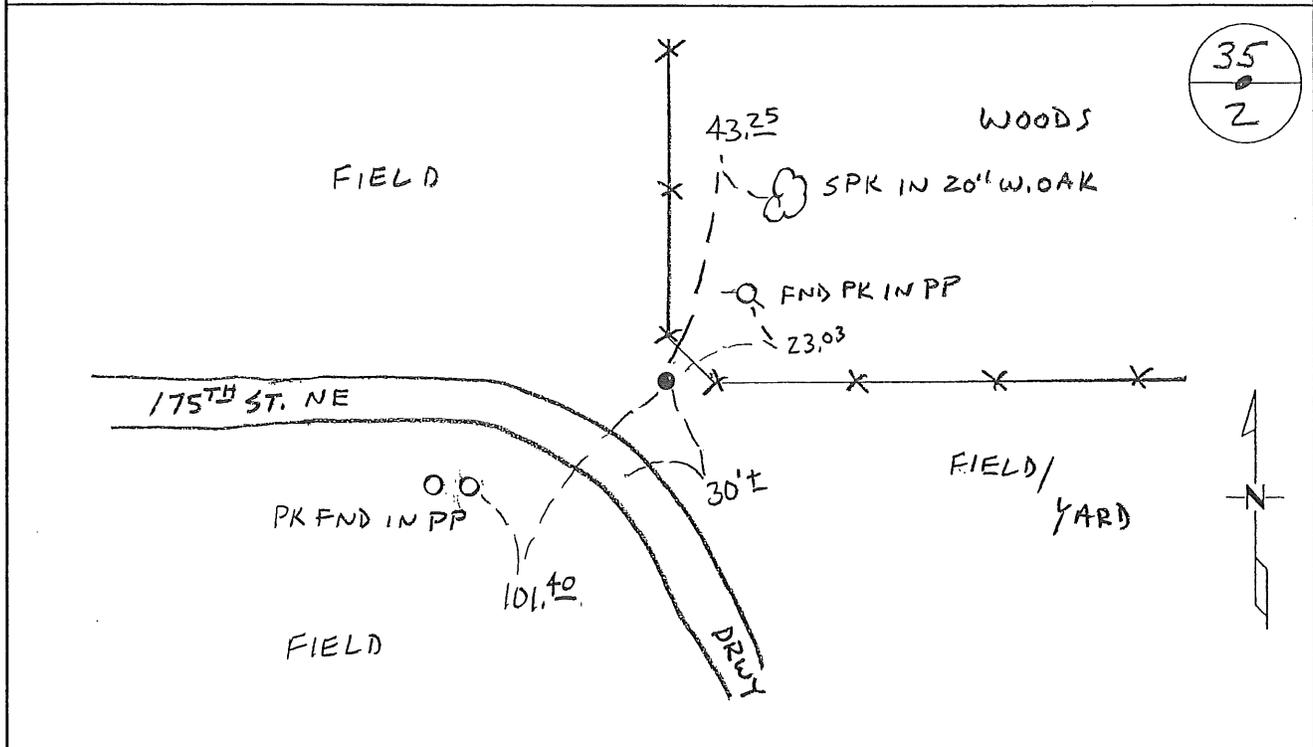

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 12/17/08

**Statement of Evidence:**

C021

North Quarter Corner of Section 2, Township 38 North, Range 30 West, Graham Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office set a wood post at this location and bearing trees were recorded  
8" Bur Oak N 73 E 260 links
- 1908 County Surveyor's Record Book 2, page 162, shows corner was used by M.J. Cleveland to establish the center of Section 2. No corner information given.
- 1914 Phil Randall, Morrison County Surveyor, notes in Surveyor Record Book A, page 167, (Morrison County) a survey of Section 35-39-30. He found stake at the corner and measured 2663 feet to the SE corner and 2646 to the SW corner. Survey shows he set 1/16<sup>th</sup> corners between.
- 1988 Paul Wellen, LS 10461, searched for and found nothing. He set a cast iron monument at the centerline extension of a road from the west, and fence lines from the north and east. He notes a distance of 2639 feet from the corner set to the apparent NW corner marked by occupation. He filed a Certificate of Location (191337).
- 2008 Westwood Professional Services, Inc. found a CIM fitting 1988 Wellen ties. CIM is 0.77 feet south of proportioned distance using 1914 Randall measurements. Measured 2641.95 feet to the NW corner and 2659.28 feet to the NE corner of Section 2. CIM is accepted as marking the obliterated position for this corner.  
Coordinates Obtained by GPS  
NAD 83 (1996 Adjustment)  
N-196478.328  
E-502075.195

A 362628

Certified, Filed and or Recorded on  
Dec. 26, 2008 AT 10:48AM

Signed:

*CK*

MARILYN J NOVAK ~~G V I~~  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

## DOCUMENT COVER SHEET

Document Name:           **GOVERNMENT CORNER**

**BENTON COUNTY OF**

**THE PUBLIC**

Document Date:           **12/17/2008**

This cover sheet is being attached to this document to provide room for recording information and is considered part of this document

3-54  
2-18

Index No. \_\_\_\_\_

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 2, Township 38 N, Range 30 W, 4TH P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 26 JUNE 1988 found a SEE REVERSE SIDE FOR FURTHER INFORMATION  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 8 JULY 1988 placed a CAST IRON MONUMENT  
DATE

## SKETCH OF REFERENCE TIES

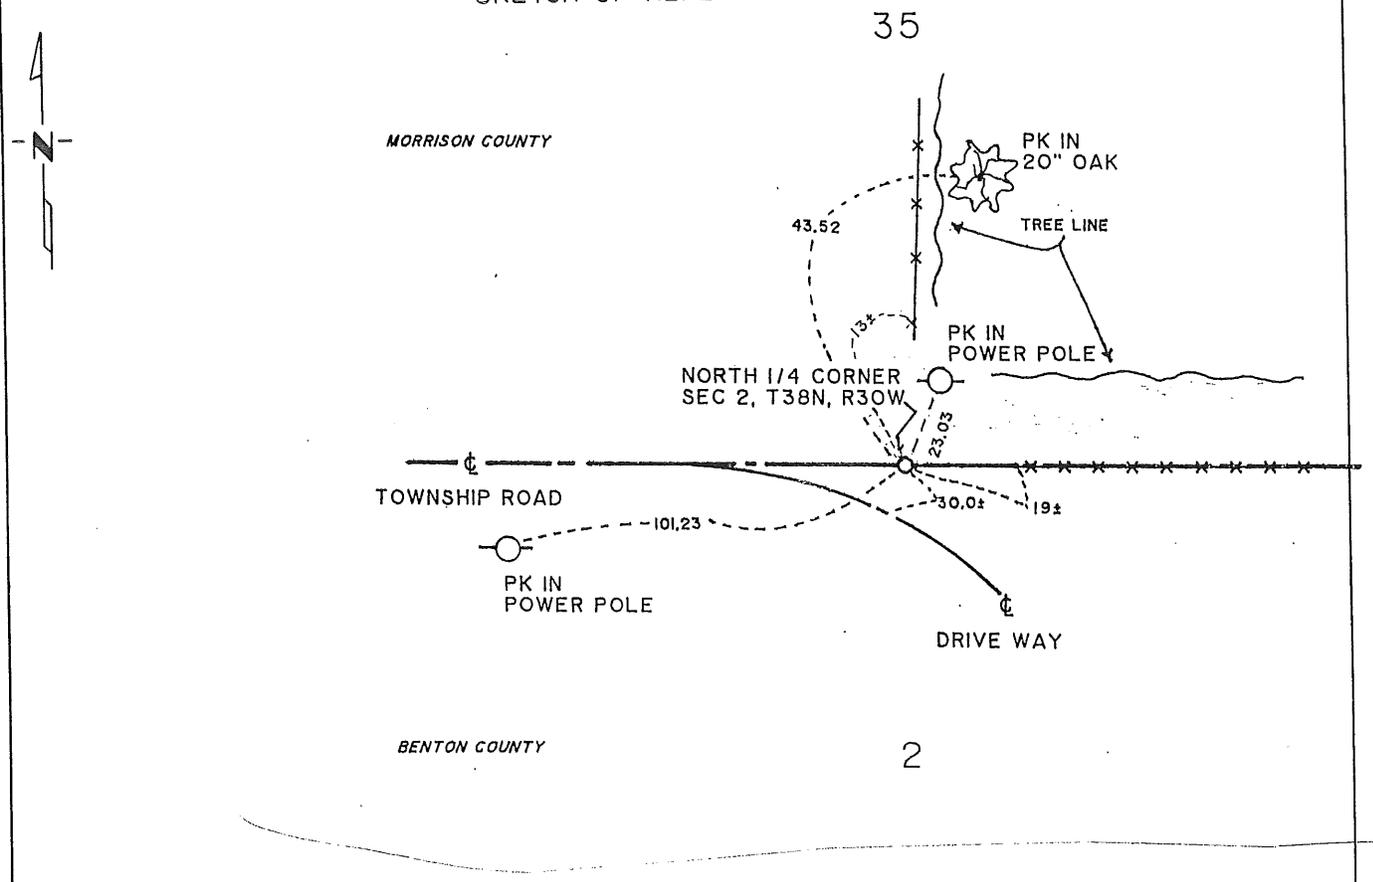

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Shipton 1-3-89  
SIGNATURE DATE

Registration No. 17768

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

NORTH QUARTER CORNER, SECTION 2, T38N, R30W, 4TH P.M

1. During the G.L.O. Survey of 1849, Mr. Theodore Conkey, a U.S. Deputy Surveyor, set a wood post to mark said corner.
2. Benton County's old surveyors's books provided no information to locate said corner.
3. On May 13, 1913, Phil S. Randall, Morrison County Surveyor, indicated that said corner was 2646 east of the northwest corner of said section.
4. On June 28, 1988, Paul E. Wellen & Associates searched for said corner at 2646 east of the occupation at the northwest corner of said section, the occupation was the north-south center line of the existing County road and found nothing. At a distance of 2639 east of said occupation at the northwest corner of said section, we located an old fence line running north and east. We accepted this fenceline intersection as evidence of the location of said corner. On July 8, 1988, we set a cast iron monument at the intersection of said fencelines and established new reference ties as indicated.

191337

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 20 9 11 AM '89

ALICE G. ENGELMEYER  
COUNTY RECORDER

BY      DEPUTY