

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 4, Township 38, Range 30, 4th P.M.

STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:


On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 8-16-84 placed a CAST IRON MONUMENT  
DATE

### SKETCH OF REFERENCE TIES

115 NW  
1/4  
4-38-30

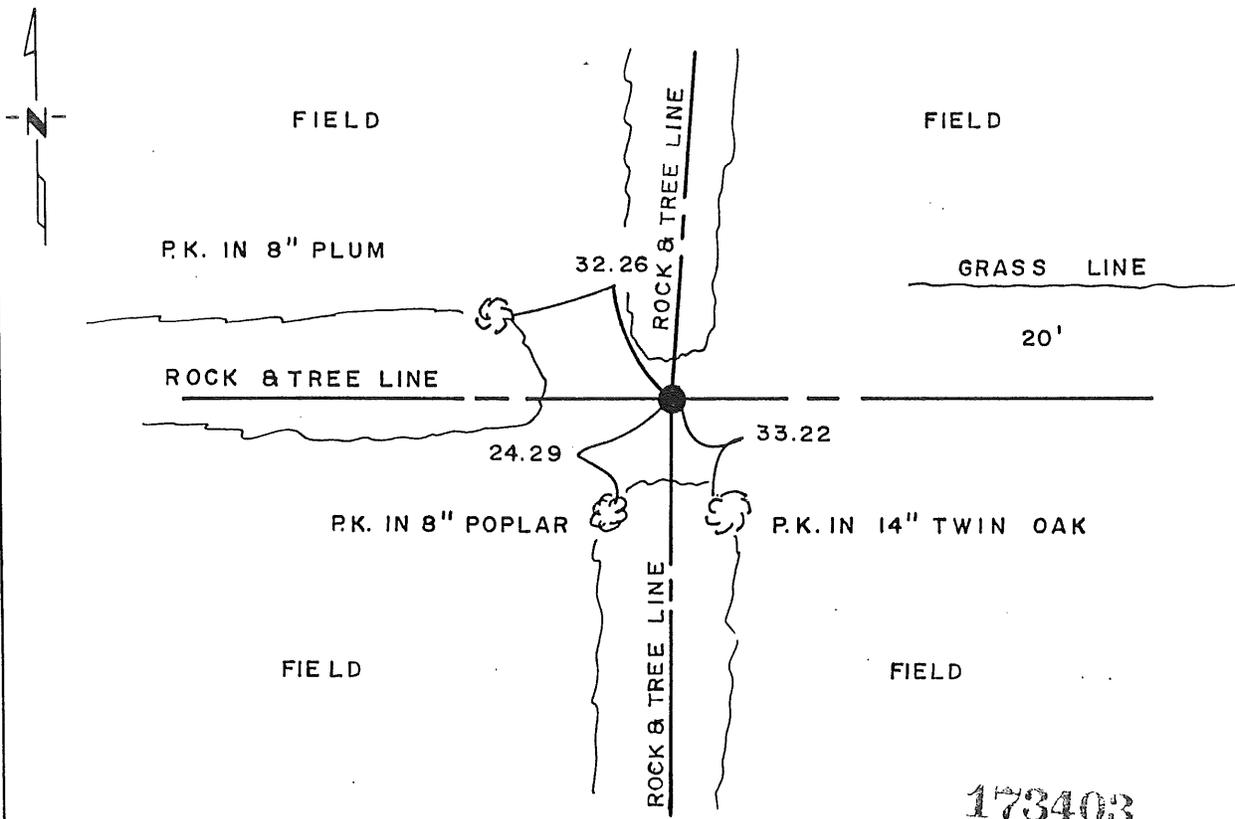

173403

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sam J. Miller 1/5/85  
SIGNATURE DATE

Registration No. 10461  
 Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of Benton

I hereby certify that this document was filed in the Co. Recorders office at 11:00 A.M. on the 11 day of May A.D., 1985

County Recorder Olise C. Engelmeier  
By [Signature], Deputy  
DOCUMENT NO. \_\_\_\_\_

**Statement of Evidence:**

North Quarter corner, Section 4, T38N, R30 W, 4th P.M.

During th G.L.O. Survey of 1858, Wilbur F. Duffy, a U.S. Deputy Surveyor, set a wooden post to mark this corner.

The Minnesota Highway Department, located this corner during its alignment survey of Minnesota Trunk Highway 25.

In 1984, Paul E. Wellen, L.L.S., St. Cloud, Minnesota, Set a Cast Iron Monument at a location by angle and distance from the northeast corner of Section 5, T38N, R30W, according the Minnesota Highway Department Highway Stationing.