

Certified, Filed and or Recorded on  
Dec. 24, 2008 AT 08:53AM

Signed: BW  
MARILYN J NOVAK B V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER



NORTH QUARTER Corner of Section 11, Township 38, Range 30  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-21-08 found a CAST IRON MONUMENT

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

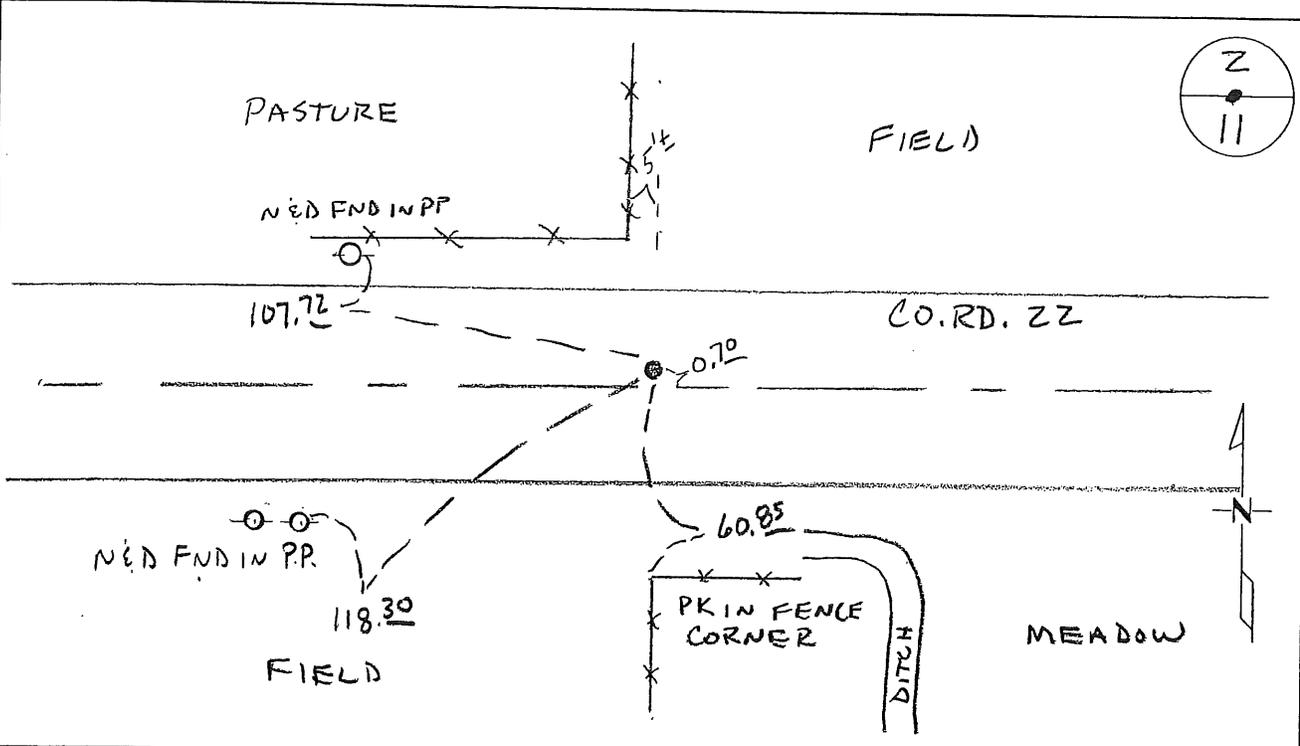

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 12/17/08

Benton County Surveyor's Office  
 Chris Hoglund, Deputy County Surveyor  
 Minnesota License No. 43932

**Statement of Evidence:**

C111

North Quarter Corner of Section 11, Township 38 North, Range 30 West, Graham Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office set a wood post at this location and bearing trees were recorded..
- |           |            |           |
|-----------|------------|-----------|
| 12" Aspen | N 10 1/2 E | 150 links |
| 12" Aspen | S 89 1/2 W | 360 links |
- 1908 County Surveyor's Record Book 2, page 162, shows corner was used by M.J. Cleveland to establish the center of Section 2. No corner information given.
- 1939 County Engineer's Notebook No. 128 contains survey of CAR 22 running east to west on section line. Corner is shown as a spike set in center of road in line with fences north and south. Ties:
- |         |    |        |
|---------|----|--------|
| Cor. FP | N  | 27.95' |
| FP      | NW | 47.55' |
- Stationing gives distances of 2696.7 feet to the NE corner and 2774.2 feet to the NW corner with a delta angle of 1-06' left.
- 1964 County Engineer's Notebook No. 276 contains a road survey for CSAH No. 22 running west to east on section line. Notes show corner marked by an iron in center of road with fence line south. Notes fence north being 5 feet west. Ties are the same as listed in 1974 below. Stationing gives distances of 2774.2 feet to the NW corner and 2698.0 feet to the NE corner with a delta angle of 1-07 1/2 ' right.
- 1974 County Surveyor's Record Book 2, page 178, notes an iron with the following reference ties:
- |    |    |       |
|----|----|-------|
| PP | SW | 118.3 |
| PP | NW | 107.7 |
- 1990 Paul Wellen, LS 10461, found a 1" iron pipe at the centerline of County Road 22 and occupation north/south. He set a cast iron monument over the found pipe and filed a Certificate of Location (#206771). Ties check with 1974 ties.
- 2008 Westwood Professional Services, Inc. found CIM fitting 1990 Wellen ties. Measured 2693.30 feet to the NE corner and 2772.89 feet to the NW which agree well with 1939 and 1964 County Engineer records. CIM is accepted as marking the obliterated position for this corner.  
 County Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-191094.773  
 E-502292.733

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 11, Township 38, Range 30, 4TH P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 24 SEPT 90 found a 1" IRON PIPE  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 24 SEPT 91 placed a COUNTY MONUMENT  
DATE

### SKETCH OF REFERENCE TIES

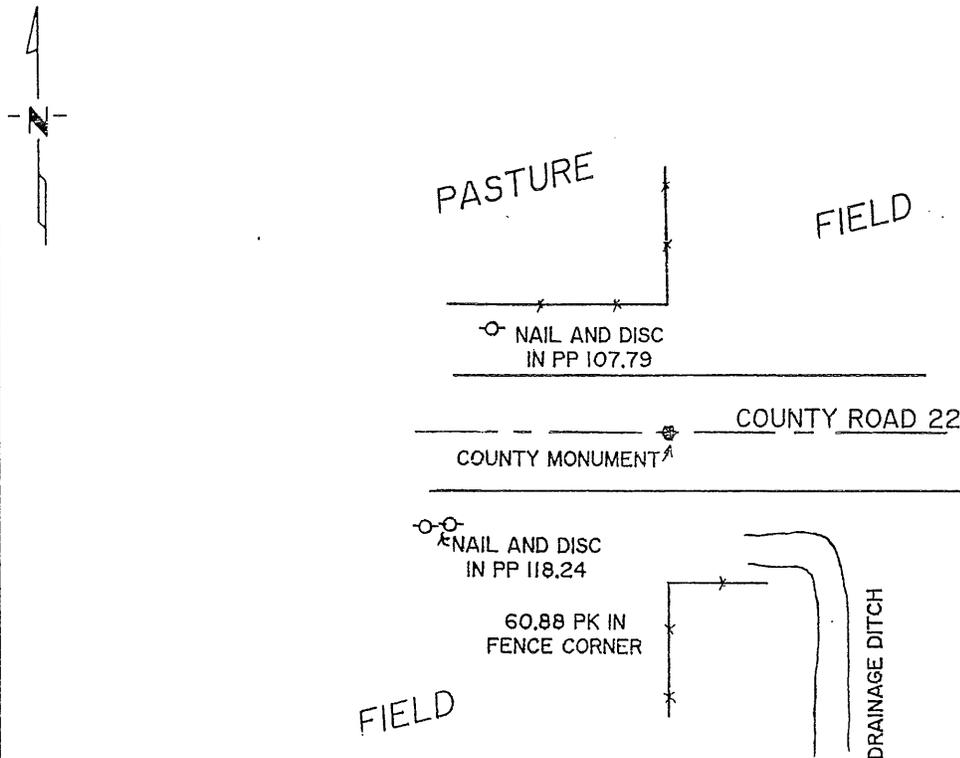

Statement of evidence relative to this corner location is on back of page. # 206771

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 2/13/92  
SIGNATURE DATE

Registration No. 10461

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of Benton

I hereby certify that this document was filed in the Co. Recorders office at 1:15 P.M. on the 19<sup>th</sup> day of February A.D., 1992.

County Recorder # 206771

By Alice C. Engelmeier

DOCUMENT NO. County Recorder

Statement of Evidence:

North corner of Section 11, Township 38 North, Range 30 West, of the 4th Principal Meridian.

1. During the G.L.O. Survey of 1852, Mr. Edwin James Jr. a U.S. Deputy Surveyor set a wood post to mark this corner.
2. Benton County's old surveyor's books provided no information to the location of this corner.
3. On September 24, 1990, Paul E. Wellen & Associates, Inc. found a 1 inch iron pipe on the center line of Benton County Road 22 and on line with north south occupation lines. We lowered said pipe and placed a County Monument at this location. We also established new reference ties.