

Certified, Filed and or Recorded on  
Nov. 06, 2008 AT 08:37AM

Signed: CK  
MARILYN J NOVAK 6 V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 12, Township 38, Range 30  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-21-08 found a CAST IRON MONUMENT

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

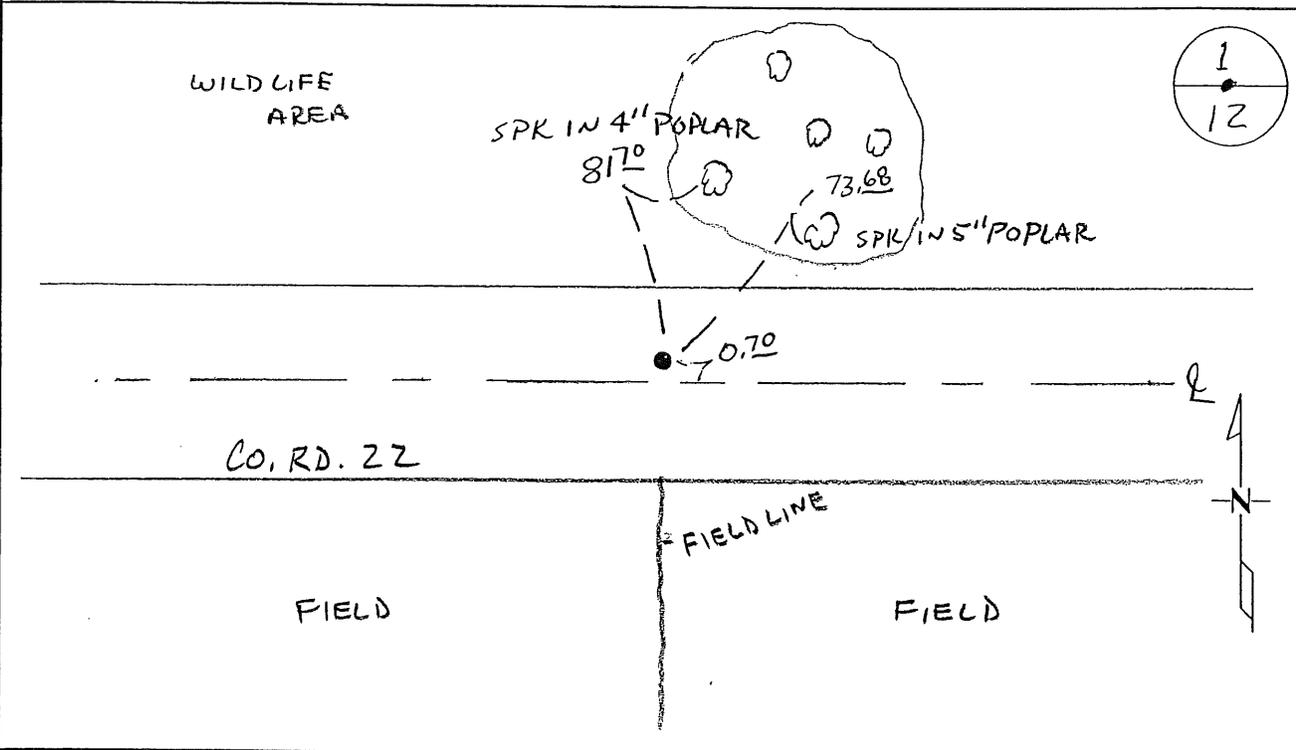

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Ch. [Signature]  
Deputy County Surveyor  
License No. 43932

Date: 11/3/08

**Statement of Evidence:****C121**

North Quarter Corner of Section 12, Township 38 North, Range 30 West, Graham Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office survey set a wood post and bearing trees were recorded.

6" Blk Oak	S 59 E	5 links
6" Aspen	N 44 W	5 links

1939 County Engineer's Notebook No. 128 contains survey of CAR 22 running east to west on section line. No corner is shown with a distance of 5338.3 feet between section corners.

1964 County Engineer's Notebook No. 276 contains a road survey for CSAH No. 22 running west to east on section line. No corner is shown with a POT set on fence line north with stationing giving distances of 2671.6 feet to the NW corner and 2667.5 feet to the NE corner.

1988 Bruce Skipton, LS 17768, dug with a backhoe and found a stone down 2 feet at the intersection of a road east/west and an occupation line north. He set a cast iron monument over it and filed a Certificate of Location (#191338). He notes a distance of 2672.29 feet to the NW Cor Sec 12 and a distance of 2666.70 feet to the NE Cor Sec 12.

2003 Westwood Professional Services, Inc. found CIM and measured 2672.42 feet to the Northwest corner and 2666.70 to the Northeast corner.  
 Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N- 191198.974  
 E- 507662.443

2008 Westwood Professional Services, Inc. found CIM fitting 1988 Skipton and our 2003 distances to the NE and NW corners of Section 12. CIM is accepted as marking the obliterated position for this corner. County Coordinates Obtained by GPS coincide with 2003 position.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 12, Township 38 N, Range 30 W, 4TH P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 28 JUNE 1988 found a STONE 2.0± FEET BELOW EXISTING BITUMINOUS SURFACE.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 15 JULY 1988 placed a CAST IRON MONUMENT  
DATE

### SKETCH OF REFERENCE TIES

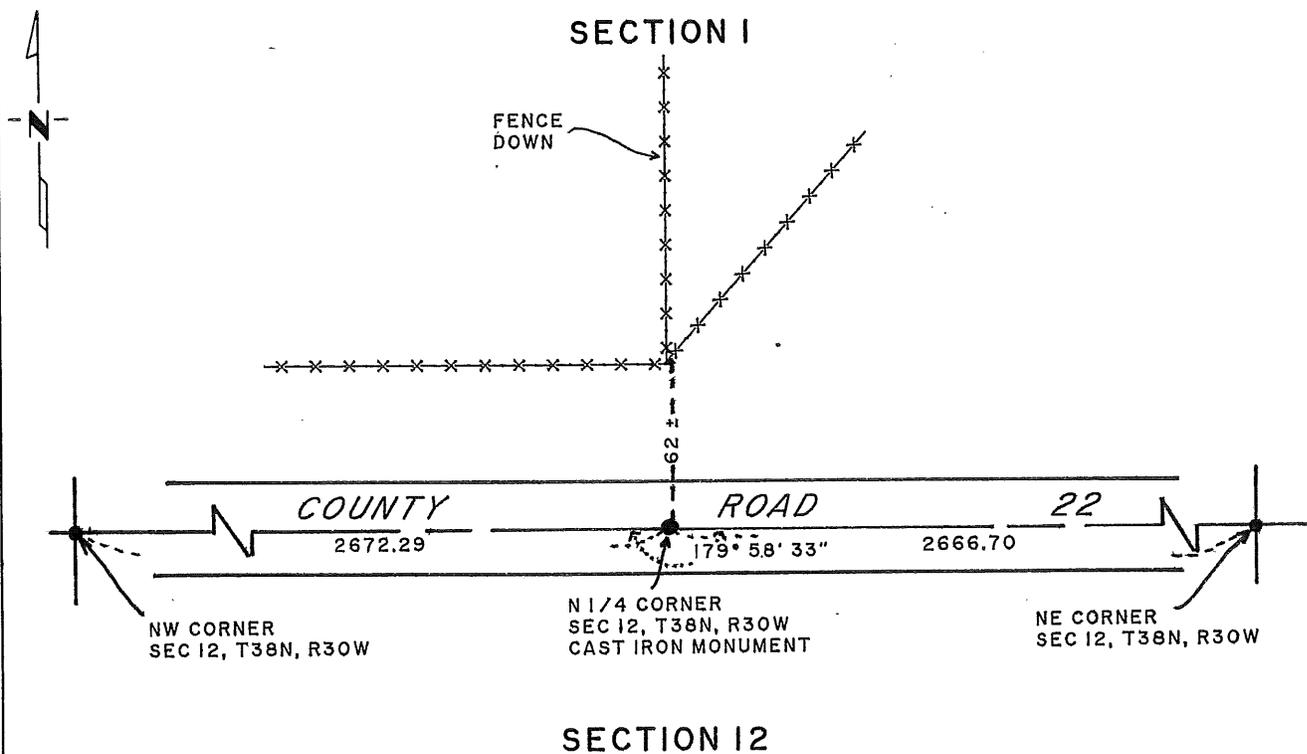

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Skipton 1-3-89  
SIGNATURE DATE

Registration No. 17768

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

NORTH QUARTER CORNER, SECTION 12, T38N, R30W, 4TH P.M.

1. During th G.L.O. Survey of 1852, Mr. Edwin James Jr. a U.S. Deputy Surveyor, set a wood post to mark this corner.
2. Benton County's old surveyor's books provided no information to relocate said corner.
3. On June 28, 1988, Paul E. Wellen and Associates Inc., dug with a backhoe, at the centerline of County Road 22 and the occupation line north, and found a stone 2.0 feet below the existing bituminous surface. On July 15, 1988 we placed a cast iron monument over said stone and established reference ties as indicated.

191338

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MO  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 20 9 12 AM '89

ALICE G. ENGELBREYER  
COUNTY RECORDER

BY  DEPUTY