

Certified, Filed and or Recorded on
Nov. 04, 2008 AT 01:17PM

Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER



NORTH QUARTER Corner of Section 14, Township 38, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-21-08 found a CAST IRON MONUMENT

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

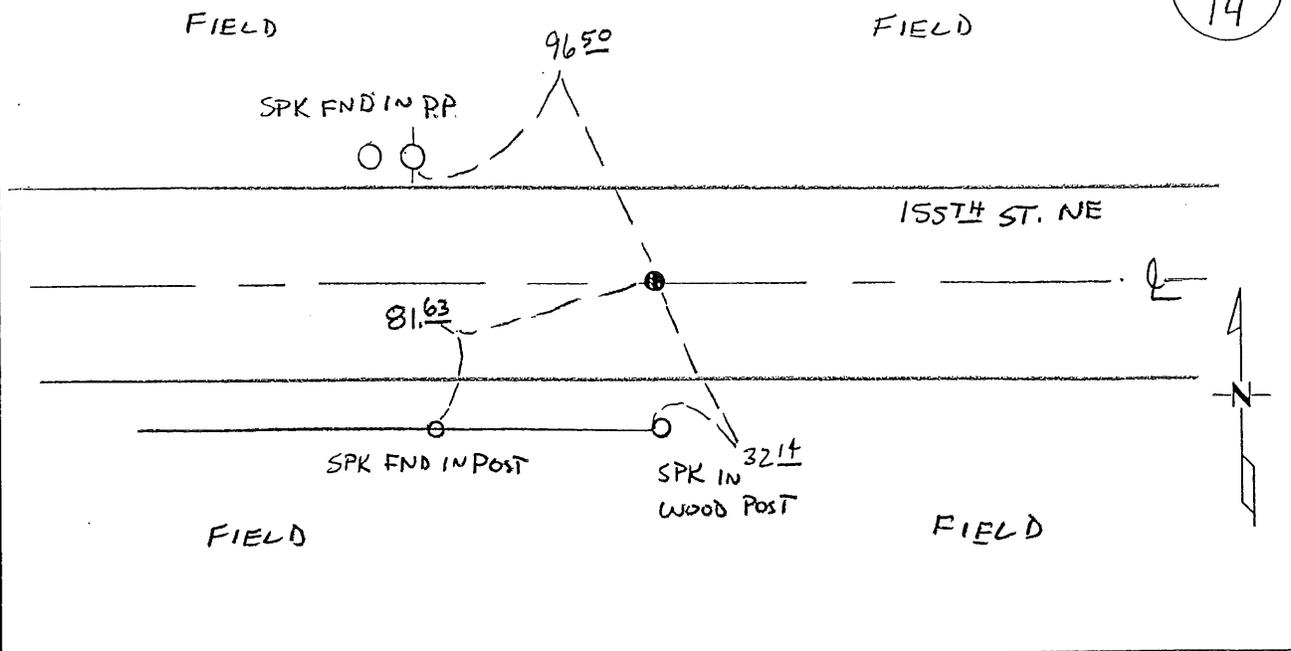

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Statement of Evidence:

C141

North Quarter Corner of Section 14, Township 38 North, Range 30 West, Graham Township, 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|----------|-------|---------|
| 8" Aspen | North | 6 links |
| 8" Aspen | South | 8 links |
- 1944 County Engineer's Notebook No. 164 contains a road survey for CAR 25 running east to west on section line. No corner is shown with stationing distance of 5194.2 feet for the north line of Section 14.
- 1985 Ronald Engelmeyer, LS 13334, set a cast iron monument at the lost location between section corners (straight line and midway), which fit an occupation line south and the centerline of a road east/west. He filed a Certificate of Location (#173450).
- 2003 Westwood Professional Services, Inc. found CIM and obtained coordinates.
County Coordinates Obtained by GPS:
NAD 83 (1996 Adjustment)
N- 185703.007
E- 502459.912
- 2003 Westwood Professional Services, Inc. found a CIM fitting 1985 Engelmeyer ties. CIM falls 0.46 feet west of lost position. Measured 2673.44 feet to the NW corner and 2674.36 feet to the NE corner of Section 14. CIM is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2003 position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter _____ Corner of Section 14, Township 38, Range 30, 4 P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On Nov. 11, 1984 found a occupation line to the south and centerline of road to the east and west.
DATE


left monument as found, lowered monument, removed monument (explain)

On April 22, 1985 placed a Benton County Cast Iron Monument.
DATE

SKETCH OF REFERENCE TIES

RH: Redhead Spike

to be
swale
" NE
" NW
" E
" S
" W
" SW
" SE
" E
" S
" W
" SE

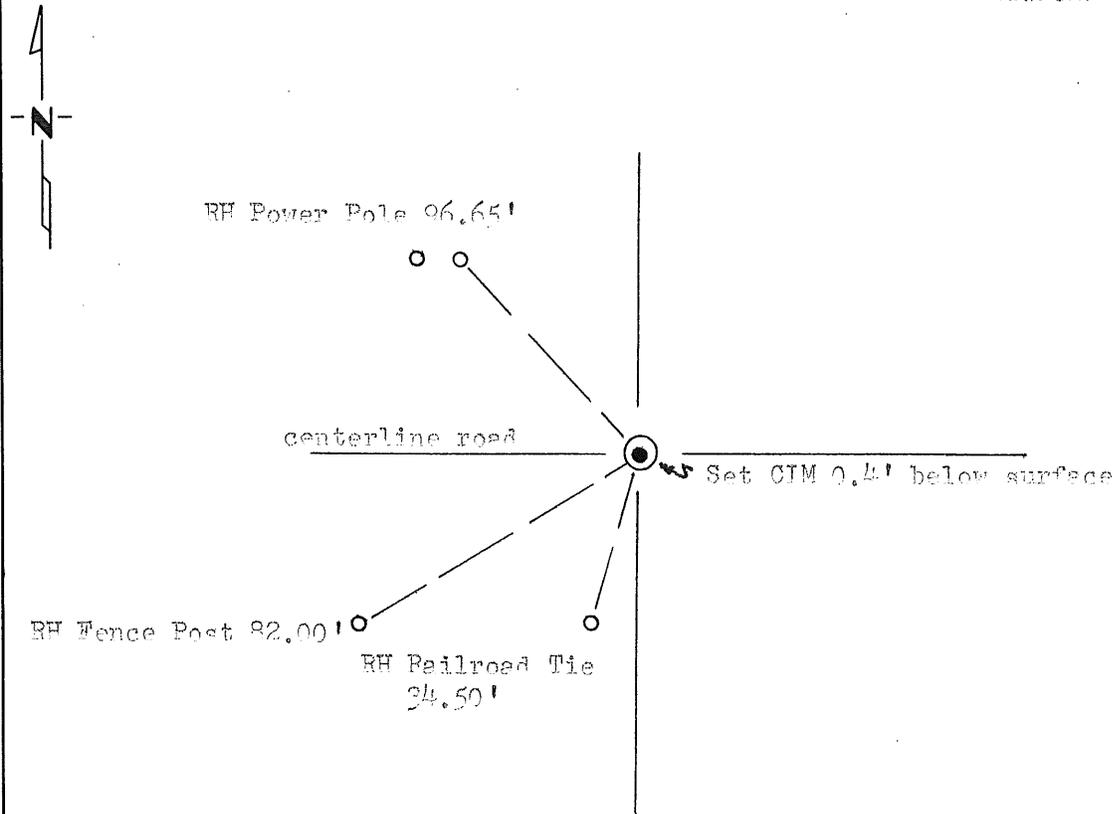

173450

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald Engeler 4-23-85
SIGNATURE DATE

Registration No. 13334

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 3 P. .M. on the 16th day of May A.D., 1985

Register of Deeds Alice C. Engelmeier
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

North Quarter Corner Section 14-28-30

The GLO shows a post set at this corner.

Benton County Highway Dept. shows no resurvey in this section.

Nov. 11, 1984 I found nothing at this corner. Set the location of the corner on a straight line and split between a 4 inch iron pipe found at the northwest corner of Section 14 and the location of the northeast corner of Section 14. This also fit the occupied position at the center of Section 14.

April 22, 1985 Set Benton County Cast Iron Monument.