

Certified, Filed and or Recorded on
Nov. 04, 2008 AT 01:13PM


Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 15, Township 38, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10-14-08 found a 1/2" IRON PIPE # 1955Z
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

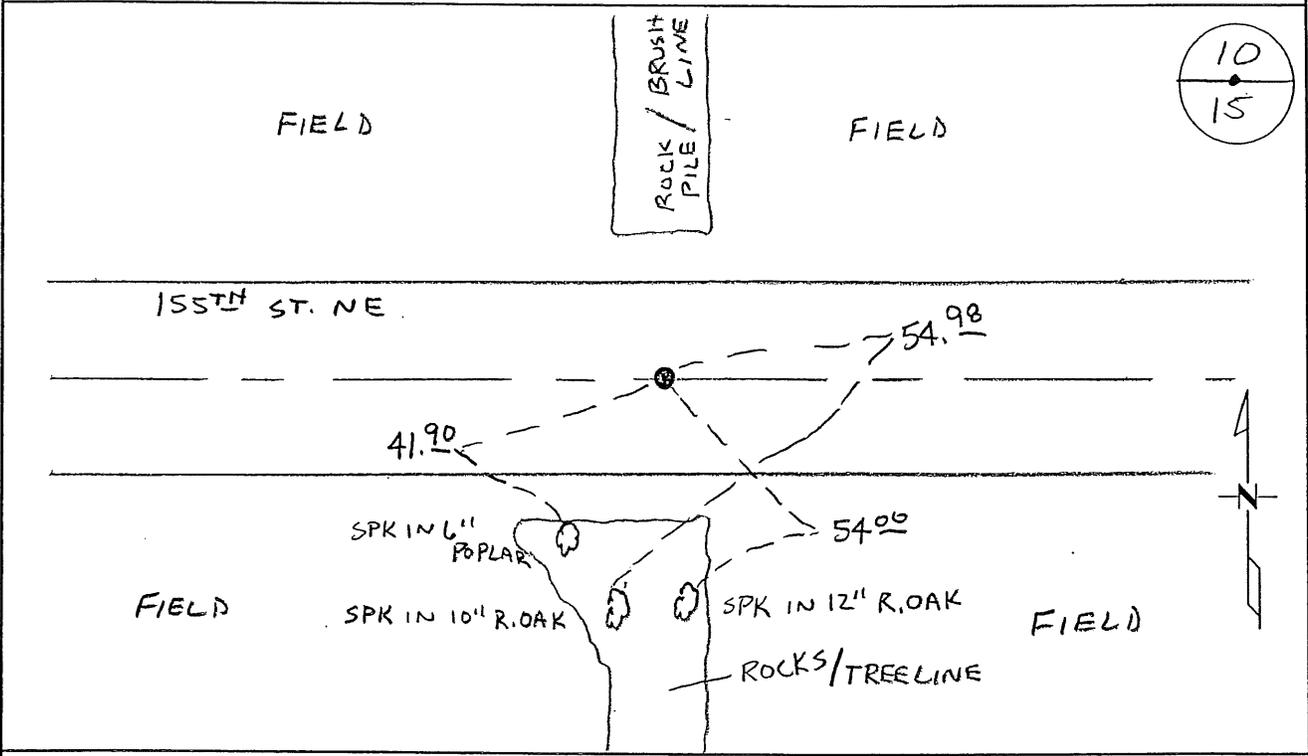

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:

C151

North Quarter Corner of Section 15, Township 38 North, Range 30 West, Graham Township, 4th Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

12" Aspen	N 21 E	31 links
10" Aspen	S 75 W	16 links

1944 County Engineer's Notebook No. 164 contains a road survey for CAR 25 running east to west on section line. Corner is shown marked by a hub set in center of road with brush and stone pile south. Ties:

3" Pop.	SE	41.7'
3" Pop.	SW	53.3'

Stationing gives distances of 2676.8 feet to the NE corner and 2678.5 feet to the NW corner with a delta angle of 0-15' right.

Undated Reference ties to a nail:

FP	NE	35.8
FP	NW	39.4

2007 The corner was excavated and a 12-inch by 14-inch by 18-inch stone was found just below the gravel surface. A 6-foot by 6-foot by 2-foot deep hole was dug to original ground and no additional corner evidence was found. The stone fits the 1944 distances within 2 feet. A 1/2-inch x 14-inch iron pipe capped 19552 was set over the found stone position. The stone was lowered to allow for the iron pipe being set.

2008 Westwood Professional Services, Inc. found a 1/2" iron pipe capped 19552. Measured 2677.46 feet to the NW corner and 2675.19 feet to the NE corner of Section 15 which conforms to 1944 measurements. Monument is accepted as marking the obliterated position for this corner.

County Coordinates Obtained by GPS

NAD 83 (1996 Adjustment)

N-185668.589

E-497111.511