

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 1, Township 38, Range 30, 4TH P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 28 JUNE 1988 found a 1" SOLID PIN 3' LONG, 6" BELOW THE EXISTING
DATE GRAVEL SURFACE OF COUNTY ROAD NO. 60.

left monument as found, lowered monument, removed monument (explain)

On 15 JULY 1988 placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

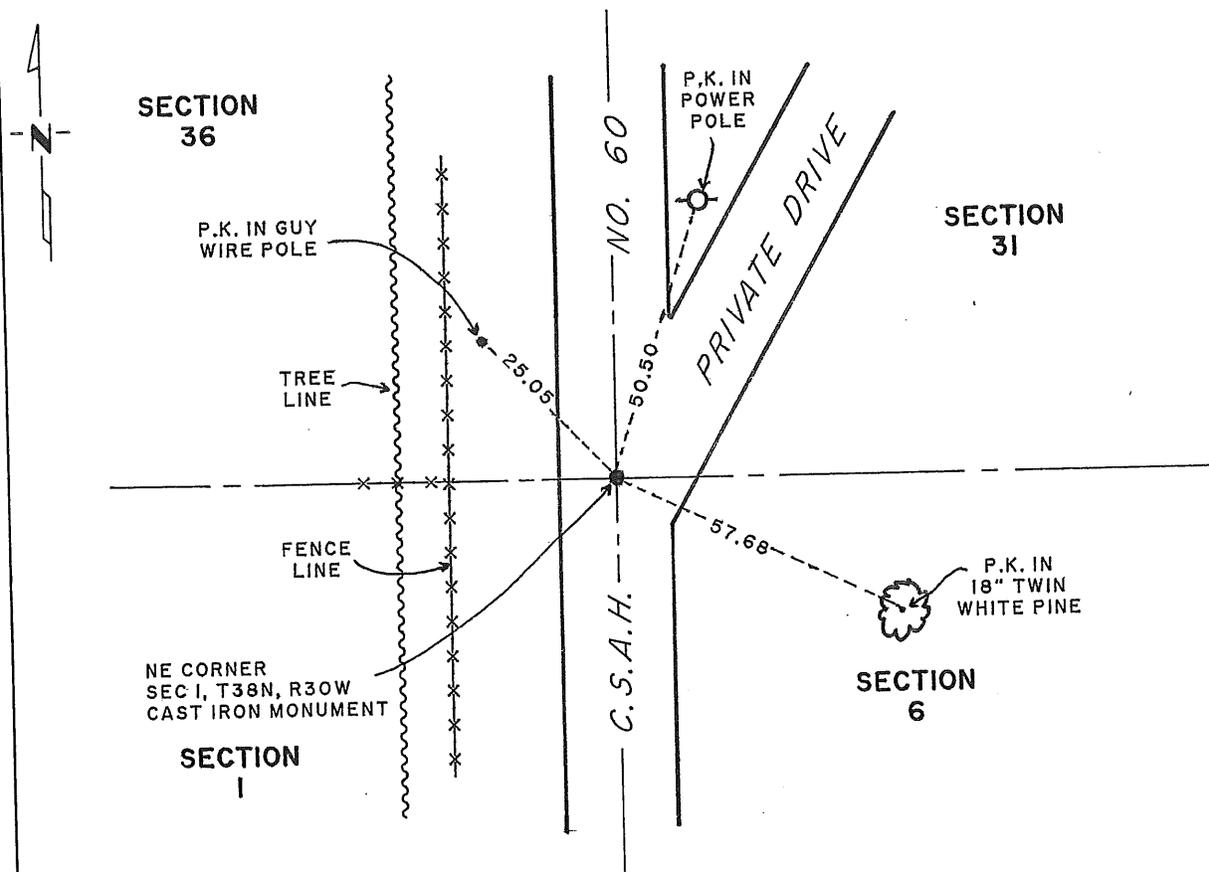

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Johnston 1-3-89
SIGNATURE DATE

Registration No. 17768
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____
By _____, Deputy
DOCUMENT NO. _____

Statement of Evidence:

NORTHEAST CORNER, SECTION 1, T38N, R30W, 4TH P.M.

1. During the G.L.O. Survey of 1849, Mr. Theodore Conkey, a U.S Deputy Surveyor, set a wood post to mark this corner.
2. On May 8, 1913, Phil S. Randall, Morrison County Surveyor, placed a stake to monument said corner.
3. Benton County's old surveyor's books provided no information to locate said corner.
4. On June 28, 1988, Paul E. Wellen & Associates Inc. found an 1 inch solid iron pin, 3 inches long 6 feet below the existing gravel surface of County Road 60, marking said corner. We dug with a backhoe below and around said iron pin and found nothing else. On July 15, 1988 we lowered said iron pin and placed a cast iron monument over it, we also established new reference ties as indicated.

191336

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 20 9 10 AM '89

ALICE G. ENGELBRECHT
COUNTY RECORDER

BY *Al* DEPUTY