

Certified, Filed and or Recorded on
Mar. 11, 2009 AT 10:22AM


Signed: Ju
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 2, Township 38N, Range 30W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 12/22/08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____

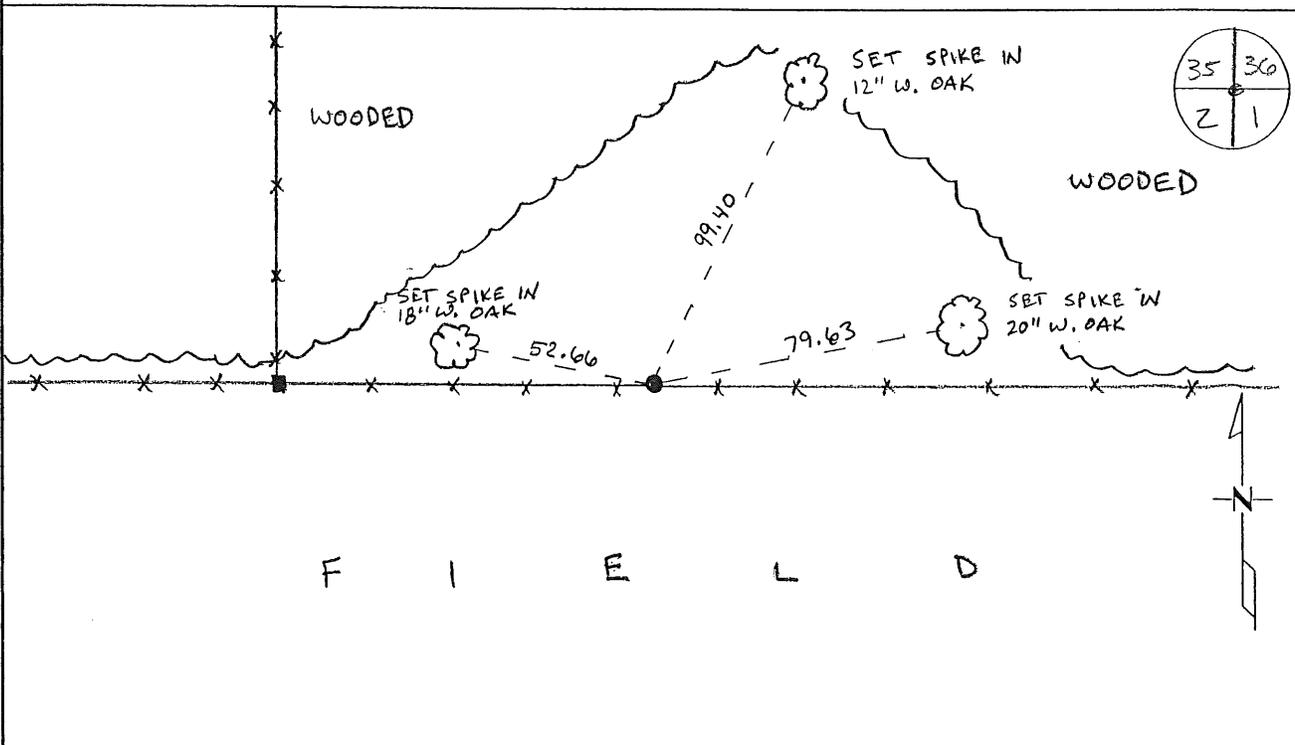

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 3/6/09

PAGE 1 OF 2

Statement of Evidence:

C022

Northeast Corner of Section 2, Township 38 North, Range 30 West, Graham Township,
4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office set a wood post at this location and bearing trees were recorded:
18" W Oak N 5 E 523 links
- 1908 County Surveyor's Record Book 2, page 162, shows survey in Section 2 by M. J. Cleveland. He notes a new BT:
12" Blk Oak S 37 1/2 E 77 links
- 1914 Phil Randall, Morrison County Surveyor, notes in County Surveyor's Record Book A, page 165, (Morrison County) a survey of Section 36, 39-30. Page 167 shows a survey of Section 35, 39-30. Survey notes a stake found at the corner.
- 1990 Paul Wellen, LS 10461, searched corner area and found no evidence of a corner marker. He set a cast iron monument on an east-west fence line at a proportionate distance to Randall's 1914 survey between the North ¼ corner of Section 1 and the North ¼ corner of Section 2. This location fits with occupation south. He filed a Certificate of Location (#199552). Gives distances of 2659.25 feet to the North ¼ corner Sec. 2 (Randall=2663 feet) and 2679.23 feet to the North ¼ corner Sec. 1 (Randall=2683.0 feet).
- 2008 Westwood Professional Services, Inc. found a cast iron monument on an east/west fence line. We found all three of Wellen's 1990 tie trees, but PK nails were not visible and all distances were consistent. Measured 2678.56 feet to the N1/4 of Section 1 and 2659.28 to the N1/4 of Section 2. CIM falls 7.14 feet north of a straight line between aforementioned section corners but is consistent with longstanding occupation lines. CIM is accepted as marking the obliterated position for this corner.
County Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-196517.713
E-504734.180

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 2, Township 38N, Range 30W, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On _____ found a _____


DATE

left monument as found, lowered monument, removed monument (explain)

On 6/7/90 placed a cast iron monument

DATE

SKETCH OF REFERENCE TIES

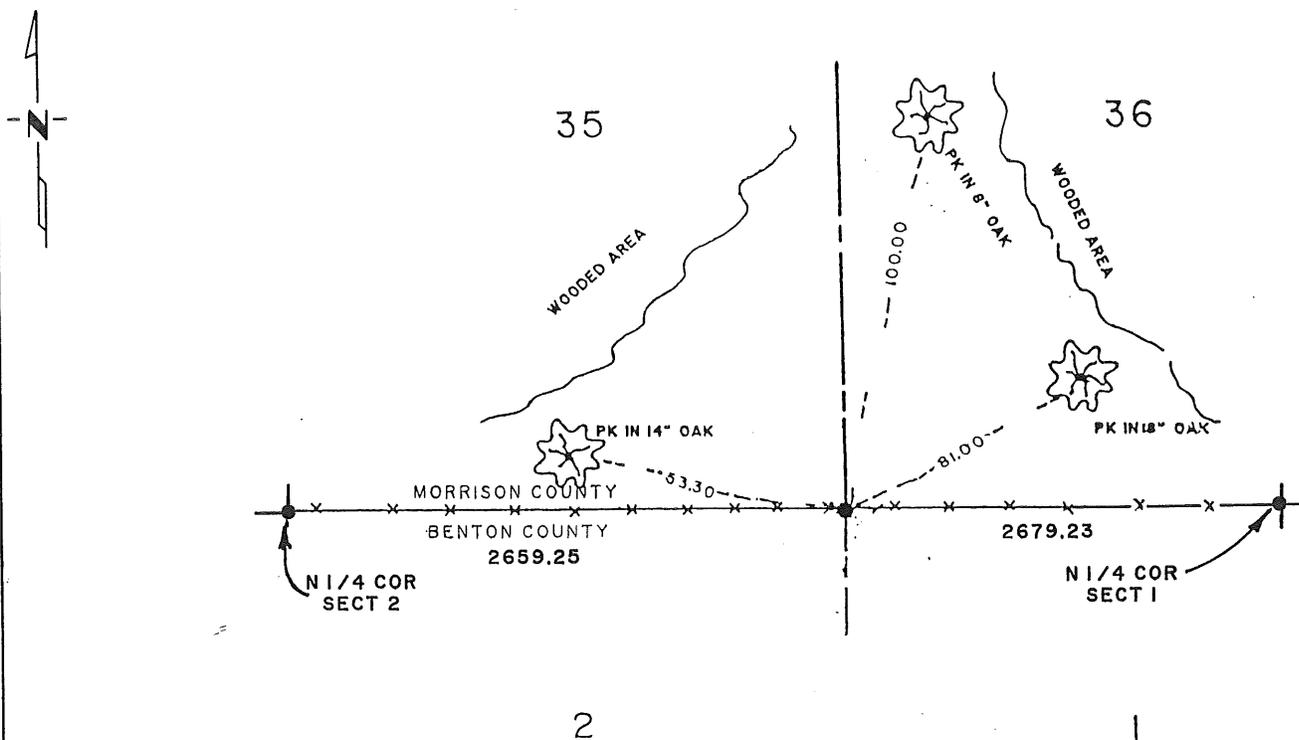

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David E. Miller 7/30/90
SIGNATURE DATE

Registration No. 10461

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

Northeast corner, Section 2, Township
38 North, Range 30 West, 4th Principal Meridian.

1. During the G.L.O. Survey of 1849, Mr. Theodore Conkey, a U.S. Deputy Surveyor set a wood post to mark this corner.
2. A search of the Benton County Surveyor records provided no information to the location of this corner.
3. On January 20, 1914, Phil S. Randall, Morrison County Surveyor placed a stake at this corner.
4. On June 7, 1990, Paul E. Wellen & Associates, Inc. searched for Mr. Randall's stake and found nothing. We set a cast iron monument on a east-west fence line at proportionate distance of Mr. Randall's Survey between the north 1/4 corner of Section 2 and the north 1/4 corner of Section 1. This location fits the occupation to the south. We also established new reference ties as indicated.

199552

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

SEP 27 11 31 AM '90

ALICE C. ENGELMEYER
COUNTY RECORDER

BY Alice C. Engelmeier