

Certified, Filed and or Recorded on
Nov. 04, 2008 AT 01:16PM


Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 7, Township 38, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10-13-08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

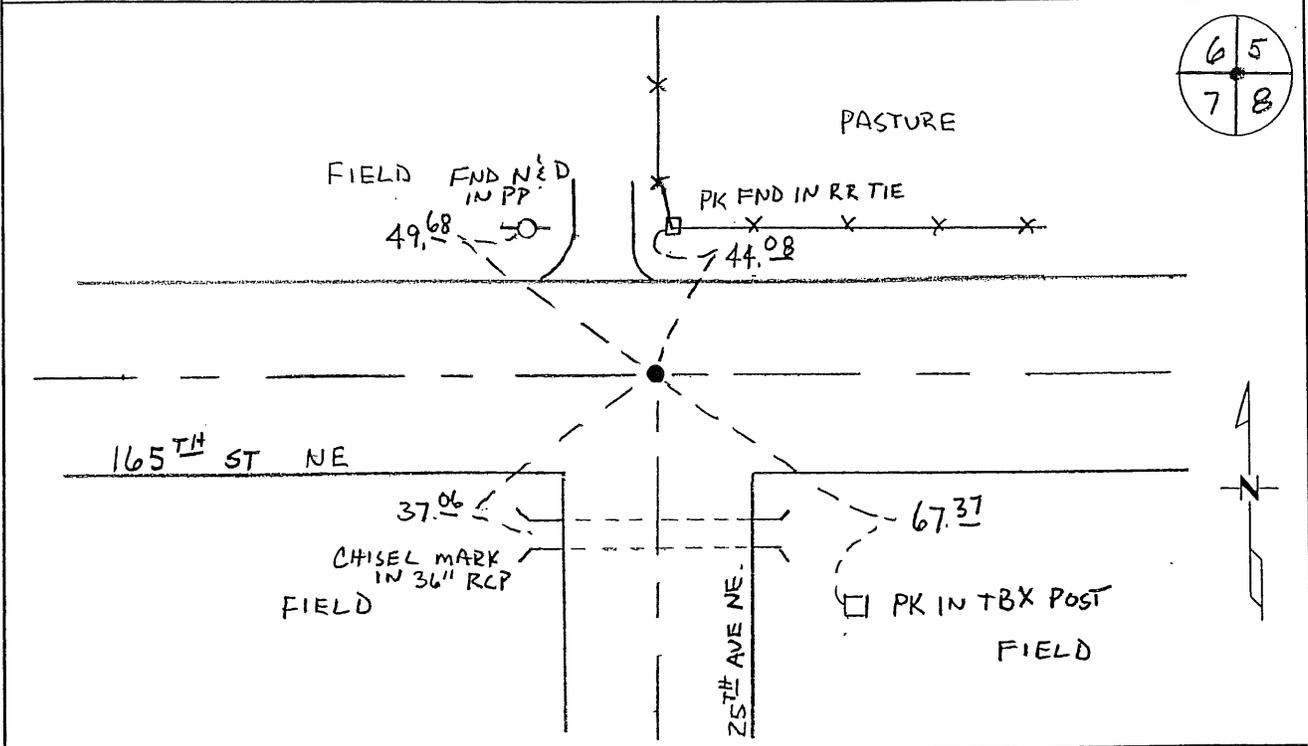

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office
 Chris Hogle, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:

C072

Northeast Corner of Section 7, Township 38 North, Range 30 West, Graham Township,
 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey established this corner and set a wood post in a mound for the corner location with a pit 8 links south.
- 1925 County Engineer's Notebook 44, page 10, notes a temporary corner with ties:
 Tel. P. N 26.9'
 E. Edge Conc. Culv. W 29.3'
- 1925 County Surveyor's Record Book 2, page 168, and Record Book A, Map No. 47, contains a survey of Sections 5 and 8 by Paul Zeese. Survey notes an iron at the corner. Tie:
 Cor. F.P. E 28.9'
- 1934 County Engineer's Notebook No. 74 contains survey for Road "O" running east to west. Notes corner as a hub in road with road south and fence north. Ties:
 Cor. FP N 35.0'
 FP NE 41.5'
- 1962 County Surveyor's Record Book 2, page 172, notes an iron with the following reference ties:
 Cor FP N 29.45
 PP NW 49.9
 TP E 51.8
- 1964 County Engineer's Notebook No. 276 contains a road survey for CSAH No. 22 running west to east on section line. Notes show corner marked by an iron in center of road with town road south and fence line north. Same ties as above in 1962.
- 1984 Paul Wellen, LS 10461, found a 3/4" X 24" Axel in the centerline of roads east/west/south and a fence line north. He replaced it with a cast iron monument (#173407).
- 2008 Westwood Professional Services, Inc. found a CIM that fit 1984 Wellen ties and one 1964 tie. CIM is accepted as marking the obliterated corner position.
 County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-191176.030
 E-483492.664

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 7, Township 38, Range 30, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 7-18-84 found a 3/4" dia. x 24" AXEL
DATE

left monument as found, lowered monument, removed monument (explain)

On 7-18-84 placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

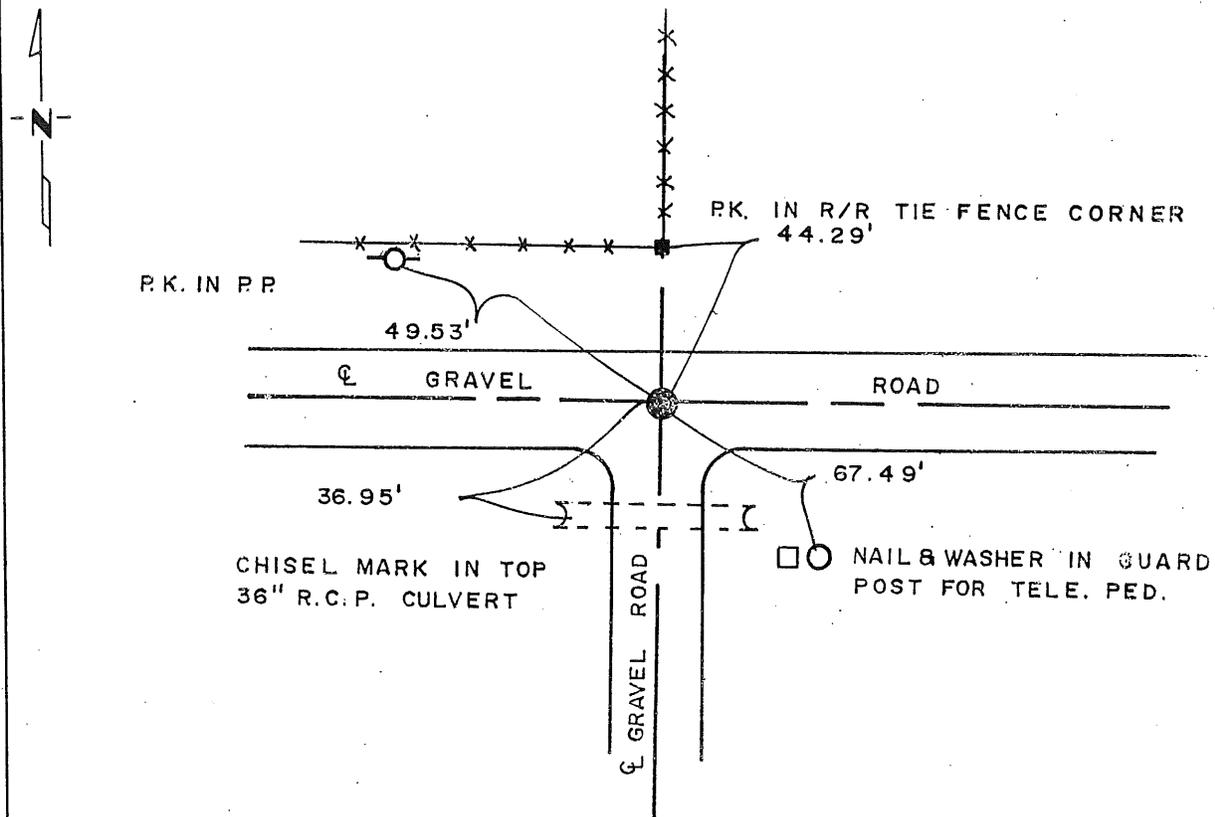

4/2/80
 5
 14/8
 6
 7
 8
 38-30

173407

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David Allen 1/7/85
SIGNATURE DATE

Registration No. 10461

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Benton

I hereby certify that this document was filed in the Co. Recorders office at 11:00 A.M. on the 11 day of May A.D., 19 85

County Recorder Alice C. Engelmeier

By AD, Deputy

DOCUMENT NO. _____

Statement of Evidence:

Northeast corner, Section 7, T38N, R30W, 4th P.M.

During th G.L.O. Survey of 1852, a wooden post was set to mark this corner.

In 1925, Paul Zeese, Benton County Surveyor, set a 3/4 inch by 24 inch axel this corner during his resurvey of Section 5, T38N, R30W

In 1984, Paul E. Wellen, L.L.S., St. Cloud, Minnesota, found the axel set by Paul Zeese, Benton County Surveyor and replaced it with a Cast Iron Monument.