

A 362573

Certified, Filed and or Recorded on
Dec. 24, 2008 AT 08:54AM


Signed: BW
MARILYN J NOVAK B V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 8, Township 38, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10-13-08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

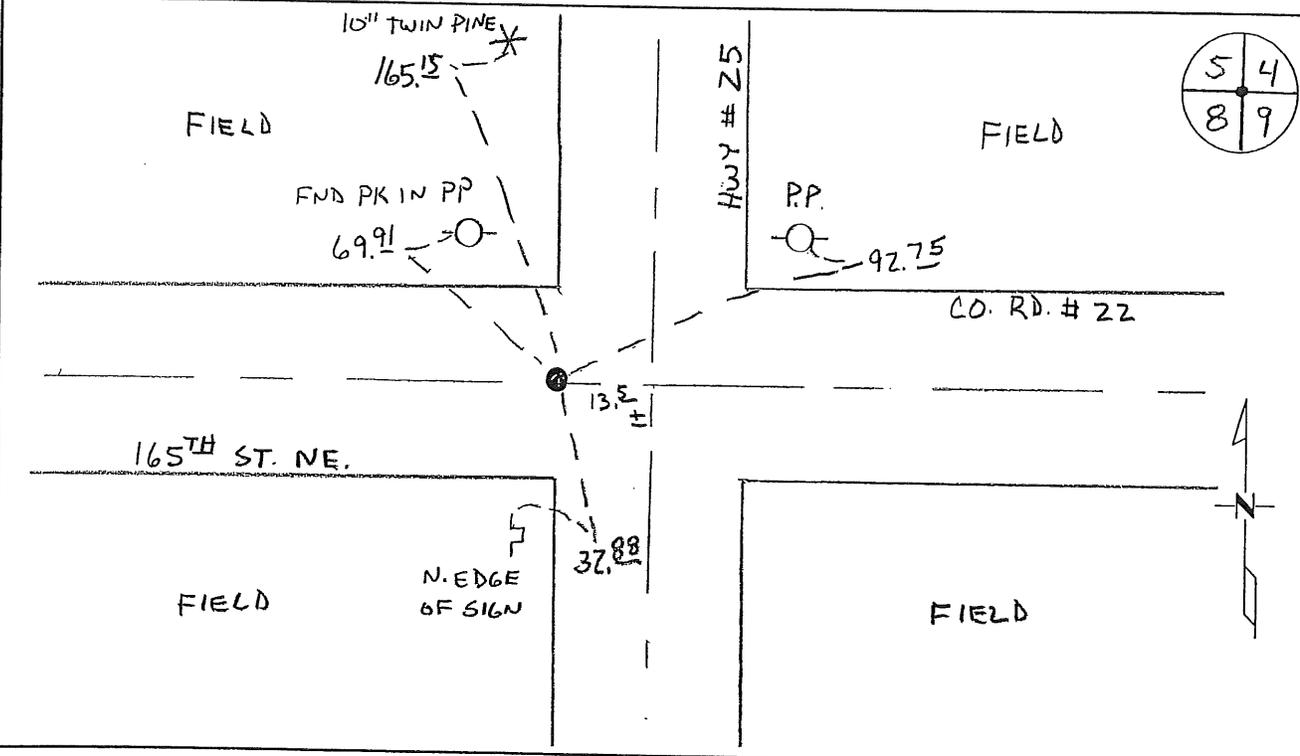

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 12/17/08

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:

C082

Northeast Quarter Corner of Section 8, Township 38 North, Range 30 West, Graham Township, 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey established this corner and set a wood post in a mound for the corner location with a pit 8 links south.
- 1923 County Engineer's Notebook No. 40 contains a survey for CAR No. 1 running south to north. Notes show corner with ties:
- | | | |
|----|----|------|
| TP | NE | 37.5 |
| TP | SE | 44.0 |
- 1925 County Engineer's Notebook No. 44, page 10, notes corner with line run north and west.
- 1925 County Surveyor's Record Book 2, pages 168 and 174, and Record Book A, Map No. 47, contains a survey of Sections 5 and 8 by Paul Zeese. Survey notes the corner with the following reference ties to an iron:
- | | | |
|----|----|------|
| TP | NE | 37.5 |
| TP | SE | 44.0 |
- 1934 County Engineer's Notebook No. 74 contains survey for Road "O" running west from this corner. Notes corner as a spike in TH running north-south. Ties:
- | | | |
|----|----|-------|
| TP | NE | 45.7' |
| TP | SE | 46.4' |
- 1952 MN/DOT alignment map for TH 25 shows corner assumed in center of roads north-south and east-west being 13.8 feet west of new centerline. Distances of 2680.5 to the North ¼ corner Section 8 and 2681.0 feet to the North ¼ corner of Section 9. Ties:
- | | | |
|-----|----|------|
| PP | NW | 58.9 |
| Hub | NE | 41.8 |
- 1964 County Engineer's Notebook No. 276 contains a road survey for CSAH No. 22 running west to east on section line. Notes show corner marked by a nail set in center of road. Ties:
- | | | |
|----------|----|-------|
| PP | NW | 69.05 |
| Sign Pst | SW | 32.2 |
- Stationing gives distance of 15.3 feet east to the center of TH 25.
- 1969 County Surveyor's Record Book 2, page 174, Kotsmith notes the following reference ties:
- | | | |
|-------------|----|-------|
| PP | NW | 69.05 |
| Sign Pst SW | | 32.2 |
| PP | NE | 45.7 |
| PP | SE | 46.4 |
- 14.36 feet west of a north/south centerline
- 1984 Paul Wellen, LS 10461, found a 3/4" X 24" Boat Spike at the centerline of an east/west road and 13.1 feet west of the north/south centerline. He replaced the found iron with a cast iron monument and filed a Certificate of Location (#173406).
- 2008 Westwood Professional Services found a CIM fitting 1984 Wellen and 1964/1969 County ties. CIM is accepted as marking the obliterated position for this corner. County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 191196.943
 E- 488842.001

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 8, Township 38, Range 30, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 7-18-84 found a 3/4" dia. x 24" BOAT SPIKE
DATE

left monument as found, lowered monument, removed monument (explain)

On 7-18-84 placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

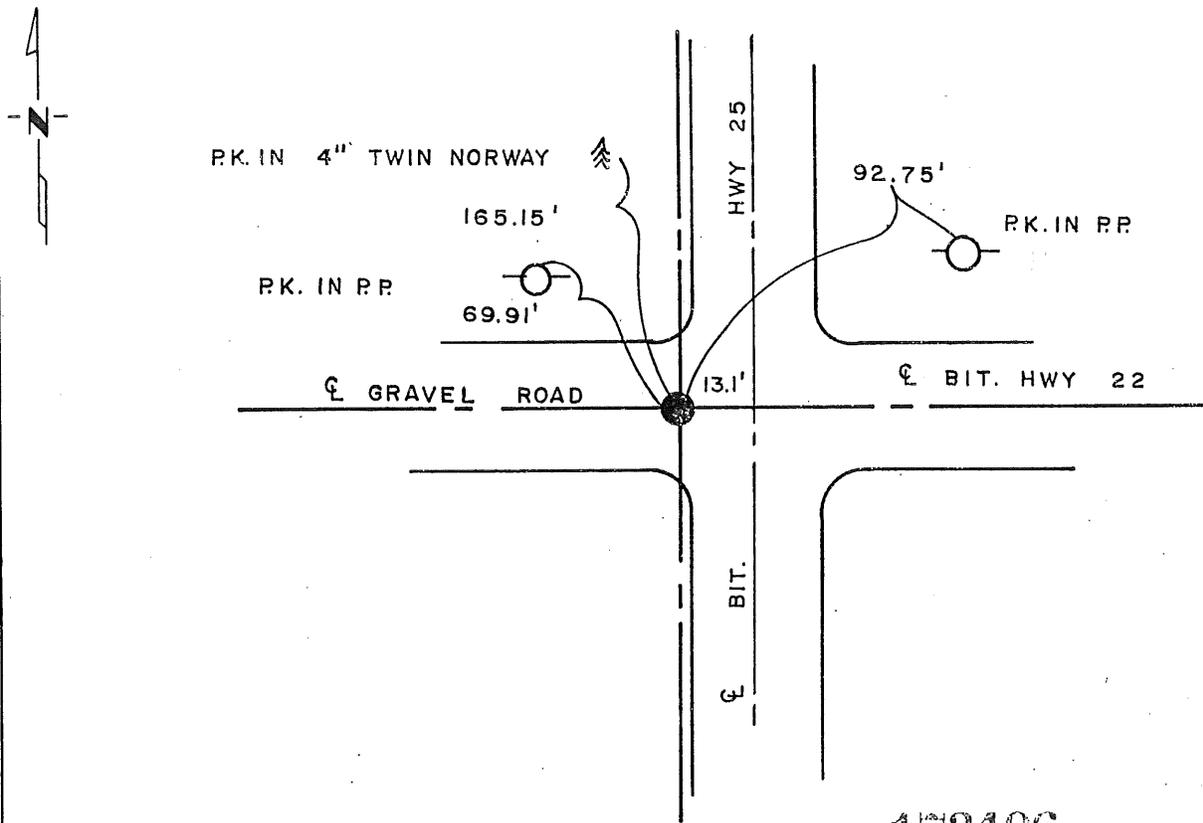

173406

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 11/7/85
SIGNATURE DATE

Registration No. 10461

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Benton

I hereby certify that this document was filed in the Co. Recorders office at 11:00 A.M. on the 16 day of May A.D., 1985

County Recorder Alice C. Engelmeier

By no, Deputy

DOCUMENT NO. _____

Handwritten notes:
4-38-30
19-85
5-28-30
12-12
8-28-30
7-10-30
9-30-30

Statement of Evidence:

Northeast corner, Section 8, T38N, R30W, 4th P.M.

During th G.L.O. Survey of 1852, a wooden post was set to mark this corner.

In 1925, Paul Zeese, Benton County Surveyor, set an iron at this corner during his resurvey of Section 5, T38N, R30W

The Minnesota Highway Department, located this corner during its alignment survey of Minnesota Trunk Highway 25.

In 1984, Paul E. Wellen, L.L.S., St. Cloud, Minnesota, found a 3/4 inch by 24 inch boat spike and replaced it with a Cast Iron Monument.