

Certified, Filed and or Recorded on
Nov. 04, 2008 AT 01:18PM

Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH EAST Corner of Section 14, Township 38, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-21-08 found a CAST IRON MONUMENT

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

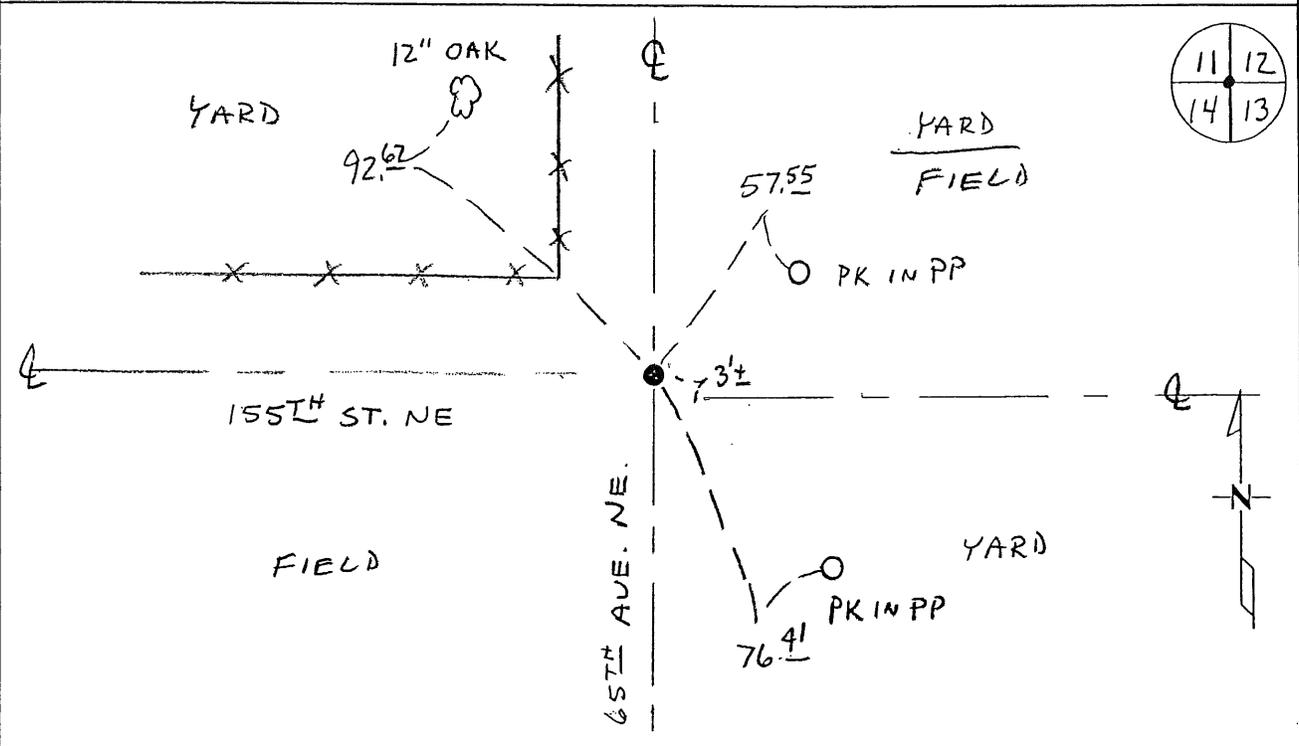

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office
 Chris Høglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:

C142

Northeast Corner of Section 14, Township 38 North, Range 30 West, Graham Township,
 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|------------|--------|----------|
| 7" Bur Oak | N 65 E | 16 links |
| 14" Aspen | S 84 W | 26 links |
- 1944 County Engineer's Notebook No. 164 contains a road survey for CAR 25 running from south to west on section lines. Corner is shown marked by a hub set for the PI. Ties:
- | | | |
|-------------|----|-------|
| 12" Bl. Oak | NW | 66.8' |
| 10" Bl. Oak | NW | 63.0' |
- Undated County Surveyor's Record Book 2, page 178, notes the following reference tie:
- | | | |
|------------|------------|-------------------|
| 7" Bur Oak | N 37 1/4 W | 140 links (92.4') |
|------------|------------|-------------------|
- 1955 County Surveyor's Record Book 2, page 184, notes the following reference ties to hub:
- | | | |
|----------------|----|------|
| 18" W Oak | NW | 91.6 |
| PP | NE | 57.7 |
| Center SE Culv | SW | 42.7 |
| Older ties: | | |
| 12" Blk Oak | NW | 66.8 |
| 10" Blk Oak | NW | 63.0 |
- 1985 Ronald Engelmeyer, LS 13334, found nothing marking the corner and set a cast iron monument at the centerline of roads north/south/east/west. Verified its location with sixteen occupation lines north and south. (Note: his ties to PP and Oak appear to agree with 1955 ties) He filed a Certificate of Location (#173454).
- 2001 Westwood Professional Services, Inc. found a CIM with the tie to an Oak NW at 92.62 feet fitting old ties and PP to the NE fitting certificate and 1955 tie. County Coordinates obtained by GPS to CIM
 NAD 83 (1996 Adjustment)
 N-185738.530
 E-505134.040
- 2008 Westwood Professional Services, Inc. found a CIM fitting 1985 Engelmeyer ties. CIM is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2001 position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 14, Township 28, Range 20, 4 P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On Nov. 11, 1984 found a centerline roads to the north, south, east and west.
DATE


left monument as found, lowered monument, removed monument (explain)

On April 22, 1985 placed a Benton County Cast Iron Monument.
DATE

Handwritten notes:
NE 12
NE 13
NE 14
NE 15
NE 16
NE 17
NE 18
NE 19
NE 20

SKETCH OF REFERENCE TIES

RH: Redhead Spike

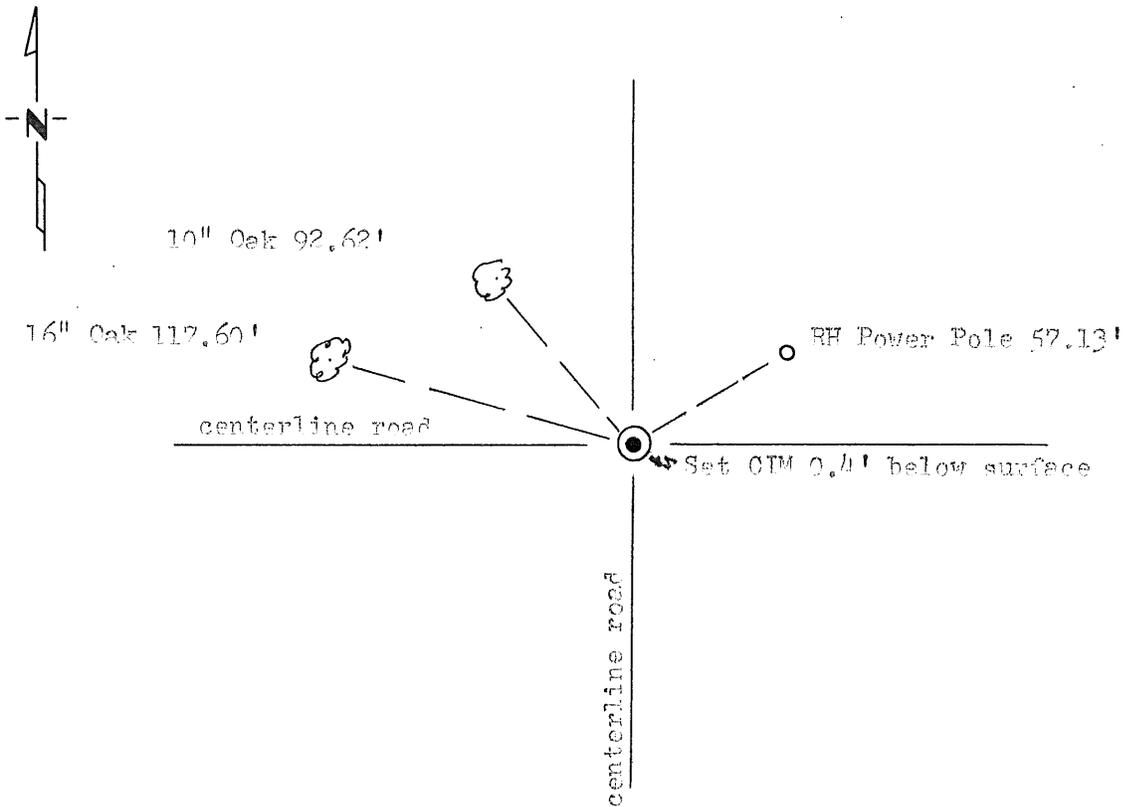

173454

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Rand Engelmeier SIGNATURE 4-23-85 DATE

Registration No. 132211

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 3 P. .M. on the 16th day of May A.D., 19 85

Register of Deeds Alida C. Engelmeier
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

Northeast Corner Section 14-38-30.

The GLO survey shows a post set at this corner.

Benton County Highway Dept. shows no resurveys in this section.

Nov. 11, 1984 I found nothing at this corner. Accepted the intersection of the centerline of the roads as the location of this corner. Verified its location with measurements to 1/16 lines to the south and to the north.

April 22, 1985 Set Cast Iron Monument.