

Certified, Filed and or Recorded on  
Nov. 04, 2008 AT 01:15PM


Signed: BW  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 22, Township 38, Range 30  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10-14-08 found a CAST IRON MONUMENT
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

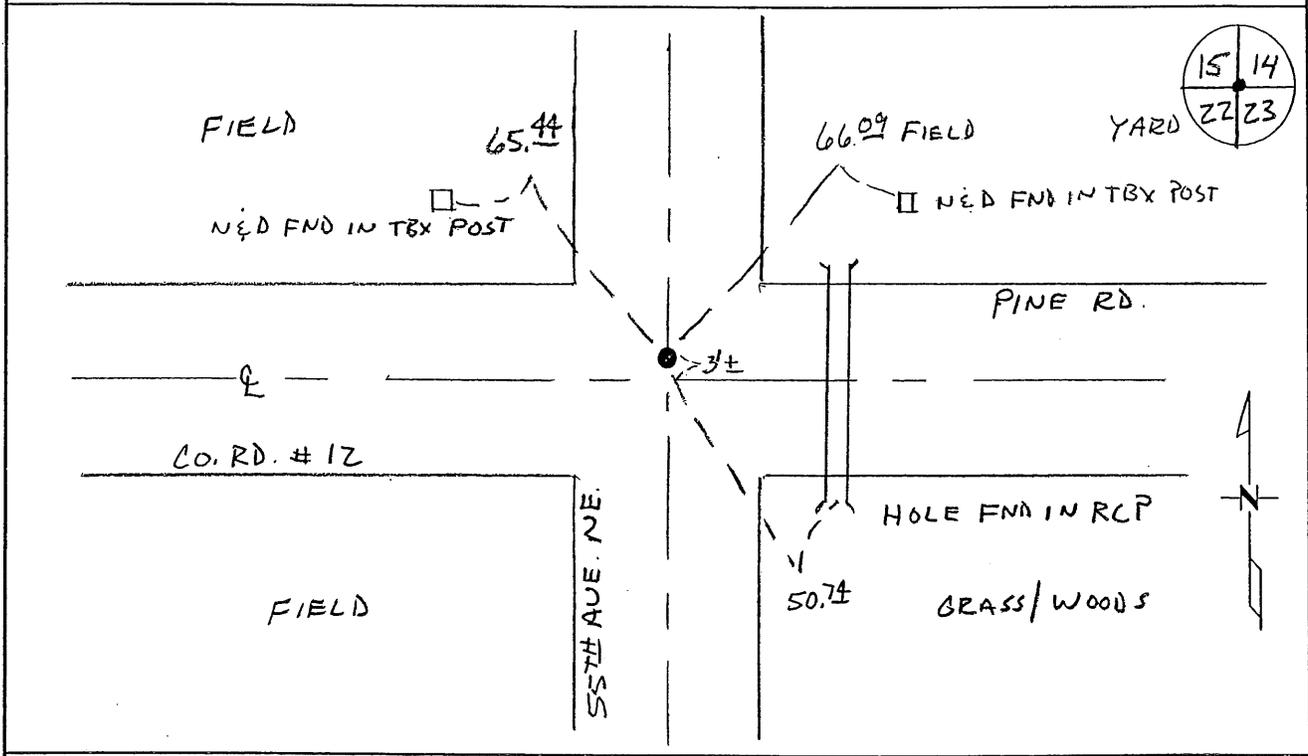

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office  
 Chris Hoglund, Deputy County Surveyor  
 Minnesota License No. 43932

Statement of Evidence:

C222

Northeast Corner of Section 22, Township 38 North, Range 30 West, Graham Township,  
 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- |           |        |          |
|-----------|--------|----------|
| 12" Aspen | N 62 E | 37 links |
| 12" Aspen | S 45 W | 9 links  |
- 1914 County Road Book, page 120 contains a road survey by M. J. Cleveland, District Engineer, for State Road No. 7. Survey shows corner found and road run east and south from the corner.
- 1929 County Engineer's Notebook No. 54 for survey of SAR 12 running west to east terminating at this corner. Corner is in center of roads north, south, and east. Ties:
- |                 |    |       |
|-----------------|----|-------|
| Cor Conc. Wall  | NE | 36.0' |
| Cor. Conc. Wall | SE | 36.3' |
- 1931 County Engineer's Notebook No. 81 for survey of SAR 12 running east to west. Corner is shown as a wood hub in 4-way road intersection with ties:
- |                         |    |       |
|-------------------------|----|-------|
| West End So. Wall Culv. | NE | 34.1' |
| West End No. Wall Culv. | SE | 33.4' |
- Same notebook shows road survey running north from this corner.
- 1959 County Engineer's Notebook No. 220 contains a road survey for CSAH 12 running west to east on section line. Corner is shown marked by an iron in center of 4-way road intersection. Note in 1963 shows corner found with same ties as below.
- 1963 County Surveyor's Record Book 2, page 200 shows an iron at this location with the following reference ties.
- |            |    |       |
|------------|----|-------|
| P.P.       | SW | 56.0  |
| T.P.       | SE | 72.5  |
| T.P.       | NW | 65.55 |
| 15" Spruce | NE | 60.05 |
- County Engineer's Notebook No. 285 contains a road survey for CR 22 running south to north on section line. Corner is shown marked by an iron in center of 4-way road intersection with same ties.
- 1983 David Regan, LS 12236, found a 1" solid pin in at the intersection of the centerlines of County Road 12 and County Road 59. He removed the 1" solid pin and set a cast iron monument at the location of the 1" solid pin and established reference ties. A Certificate of Location (#166044) was filed. (Note: Ties fit 2 PP 1963 ties).
- 2001 Westwood Professional Services, Inc. found a cast iron monument and established coordinates prior to road overlay project.  
 County Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-180454.925  
 E-499990.761
- 2008 Westwood Professional Services, Inc. found a CIM fitting 1983 Regan ties and one 1963 tie. Coordinates obtained by GPS coincide with 2001 coordinates. CIM is accepted as marking the obliterated position for this corner.

10/27/2008

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 22, Township 38, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 4/29/83 found a 1 inch solid iron pin in center line of road,  
DATE  
north, south, east and west  
 left monument as found,  lowered monument,  removed monument (explain)
- On 4/29/83 placed a Benton County cast iron monument  
DATE

## SKETCH OF REFERENCE TIES

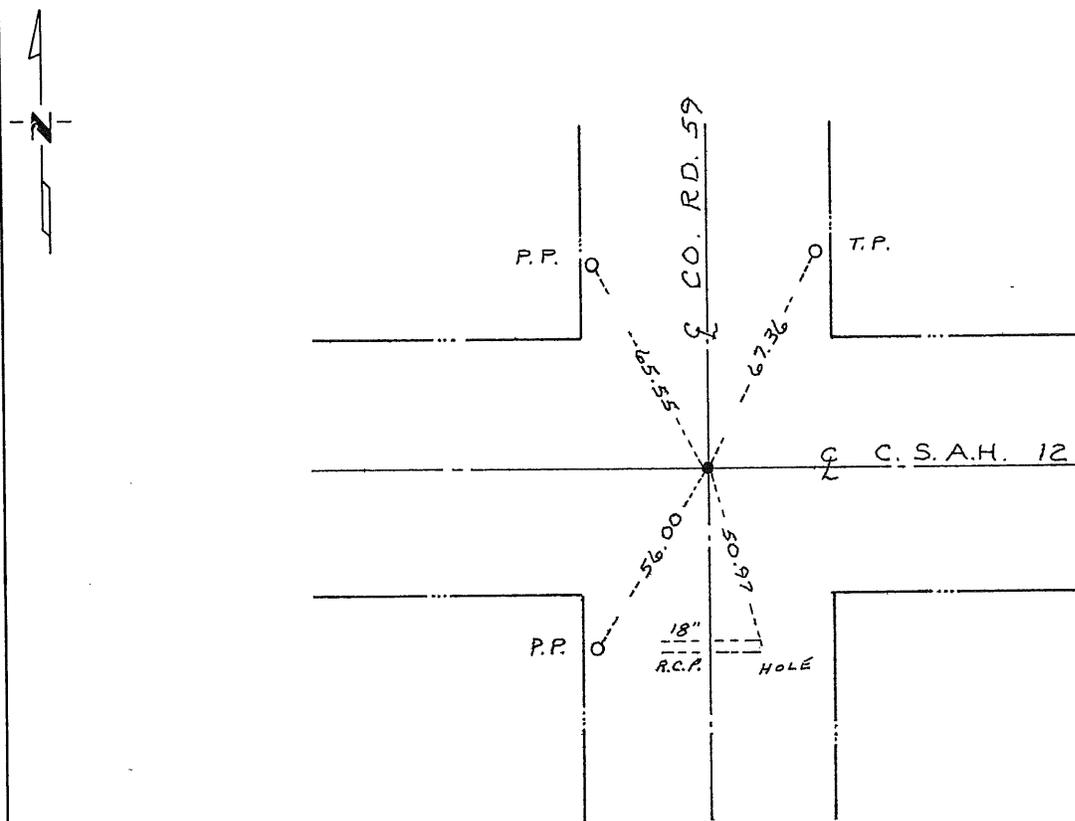

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David F. Ryan 7/14/83  
SIGNATURE DATE

Registration No. 12236

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

*County Recorder*  
OFFICE OF THE REGISTER OF DEEDS  
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A.M. on the 25 day of July A.D., 19 83  
*C. B. Johnson*  
Register of Deeds F. A. Johnson

By \_\_\_\_\_, Deputy  
DOCUMENT NO. 166044