

Certified, Filed and or Recorded on
Nov. 04, 2008 AT 12:36PM

Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 27, Township 38, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-15-08 found a CAST IRON MONUMENT

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

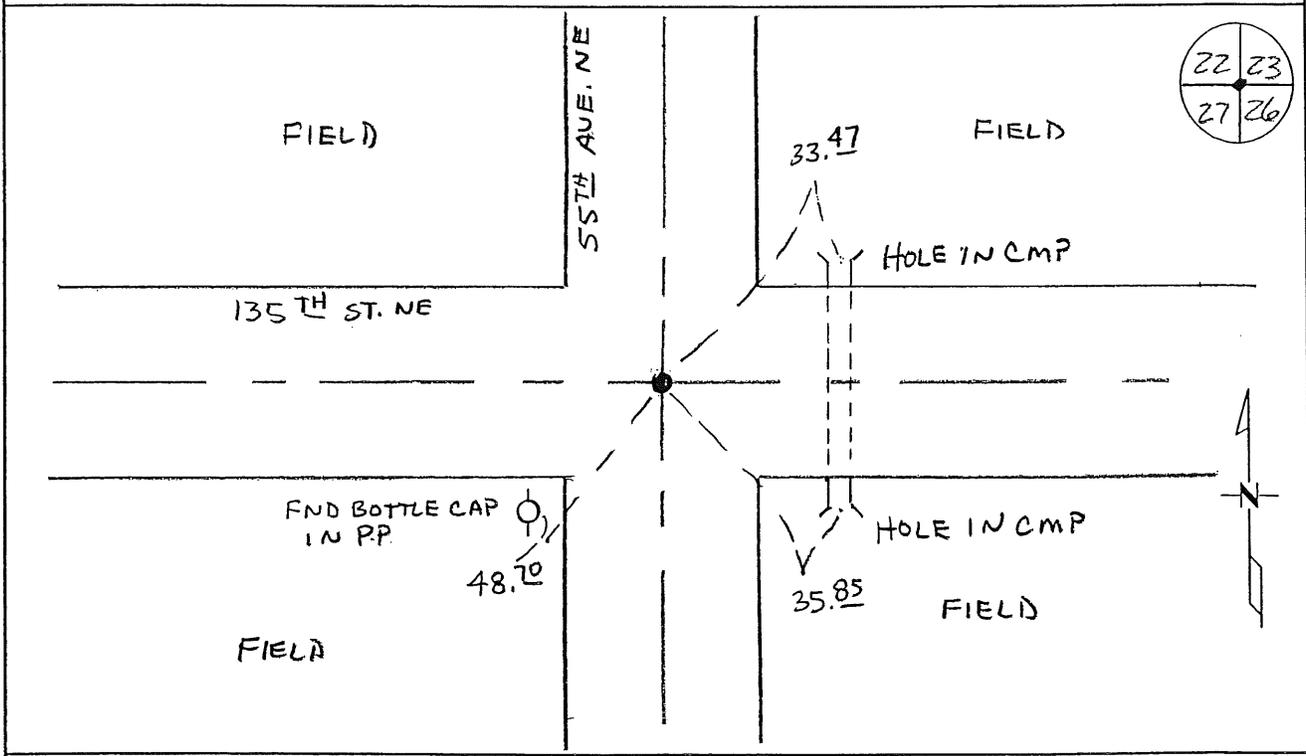

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:

C272

Northeast Corner of Section 27, Township 38 North, Range 30 West, Graham Township,
 4th Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office survey set a wood post at this location and
 bearing trees were recorded.

8" Blk Oak	N 31 1/2 E	50 links
8" Aspen	S 60 1/4 W	45 links

1931 County Engineer's Notebook No. 81 for survey of Graham aid road running north
 to south. Corner is shown as a spike. Same ties as listed in: County Surveyor's
 Record Book 2, page 210:

Cor FP	SW	26.1
3" Oak	NW	56.4

Stationing gives distance of 5374.3 feet to the NE corner of Section 22.

1983 David Regan, LS 12236, set a cast iron monument at the centerline of roads
 north/south and east/west. He filed a Certificate of Location (#166051).

2008 Westwood Professional Services, Inc. found a CIM at the intersection of roads
 north/south/east/west and fitting 1983 Regan ties. Measured 5374.83 to the NE
 corner of Section 22 which agrees with 1931 measurement. CIM is accepted as
 marking the obliterated position for this corner.

County Coordinates Obtained by GPS

NAD 83 (1996 Adjustment)

N-175085.681

E-500235.791

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 27, Township 38, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

■ On 4/29/83 placed a Benton County cast iron monument in center
DATE
line of roads north, south, east and west

SKETCH OF REFERENCE TIES

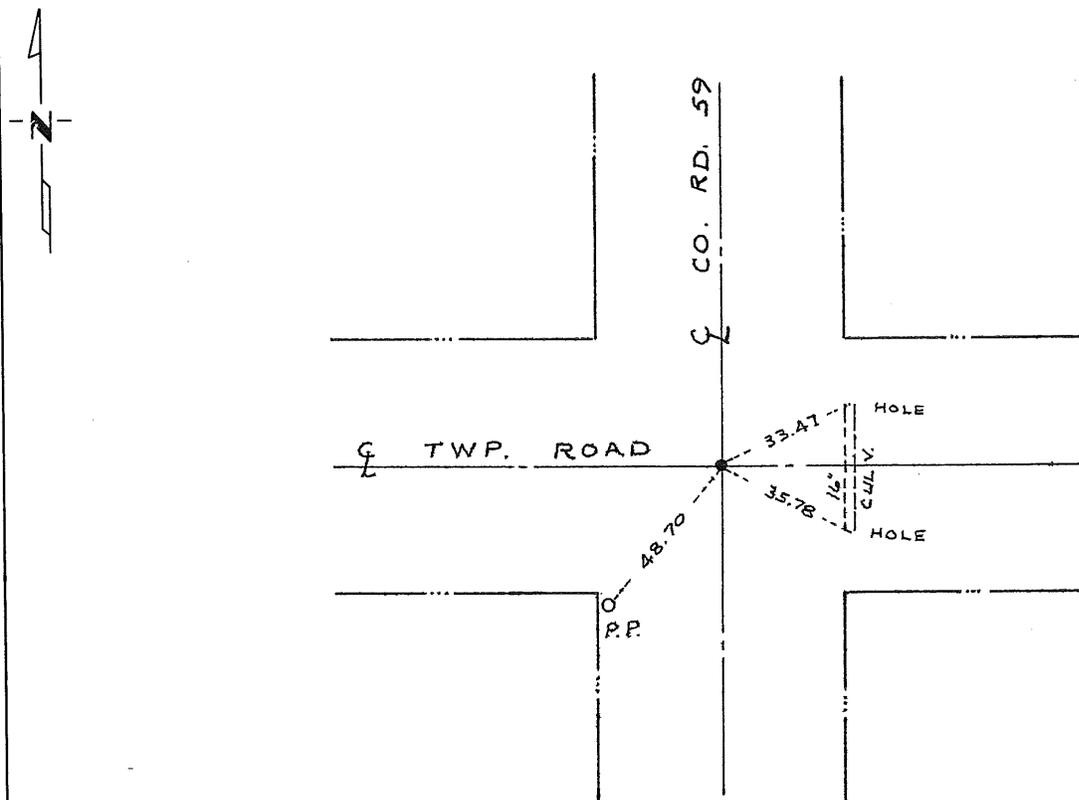

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David T. Ryan SIGNATURE 7/14/83 DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A.M. on the 25 day of July A.D., 1983

County Recorder
By F.L. Johnson Register of Deeds

By _____, Deputy

DOCUMENT NO. 166051