

Statement of Evidence:

C302

Northeast Corner of Section 30, Township 38 North, Range 30 West, Graham Township,
4th Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

8" Blk Oak	S 73 W	940 links
14" Blk Oak	S 33 E	1125 links

Undated County Surveyor's Record Book 2, page 196, notes a rock with the following reference ties:

TP	SE	58.9
TP	NE	54.5

1963 The Minnesota Dept. of Natural Resources (fka MN Conservation Dept.) performed surveys in Sections 29 and 30 for the Wisneski WMA (File No. G892-X). They reference the corner as being a spike set at the assumed location of the PI of the Co Rd and Twp. Rd. They measured 5289 feet to the NE corner of Sec. 29 (a set spike at an assumed position of PI in MN TH 25) and list a computed distance of 5380.6 to the NE corner of Sec. 31 (a set spike at an assumed position of the corner).

1990 Paul Wellen, LS 10461, found a 3/4" Iron Pipe at the centerline of roads east/west/north. He set a cast iron monument over the found pipe and filed a Certificate of Location (#200721).

2008 Sam DeLeo, LS 40341, (KLD) found a CIM per Wellen's 1990 certificate. In conjunction with Westwood Professional Services (Jay Wittstock LS 19552, County Surveyor) the site was excavated. The stone per County Surveyor's Record Book 2, page 196, was found, +/- 3.5 feet east of the CIM. A 1/2" iron pipe with cap "RLS 19552" was set over the stone and coordinates were established by Westwood. KLD recorded reference ties and verified Westwood's coordinates.

Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N- 175070.094
E- 484212.544

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 30, Township 38, Range 30, 4TH P.M.
STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 9/24/90 found a 3/4 IRON PIPE
DATE

left monument as found, lowered monument, removed monument (explain)

On 9/24/90 placed a COUNTY MONUMENT
DATE

SKETCH OF REFERENCE TIES

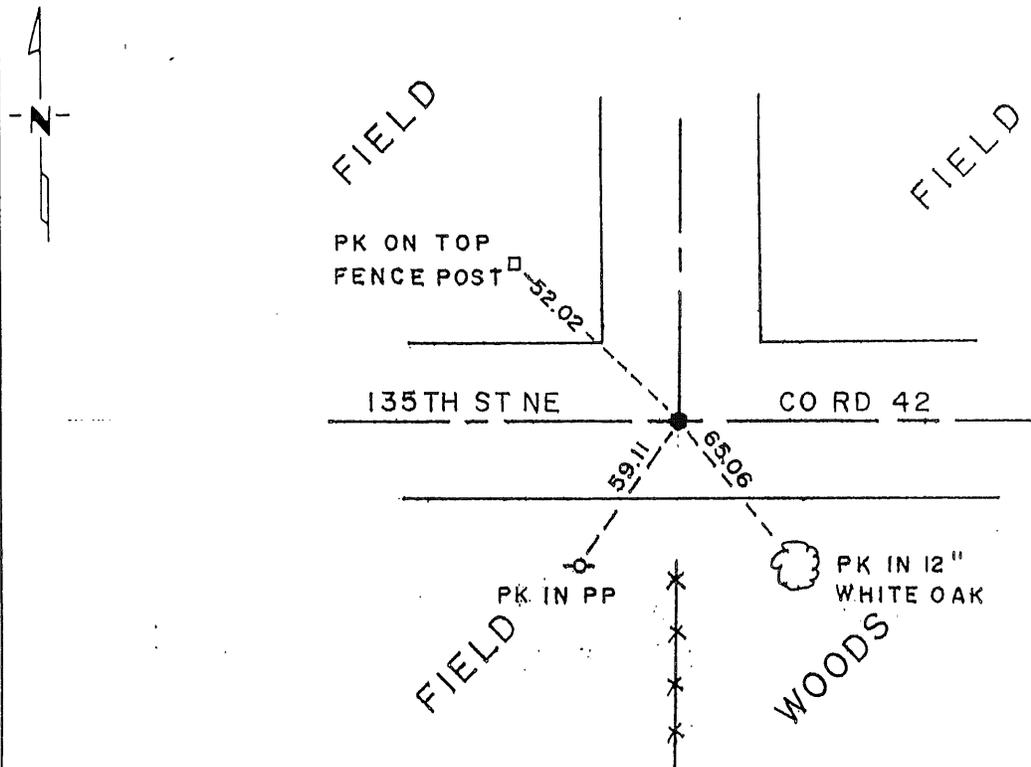

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David J. Miller 11/26/90
SIGNATURE DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence: Northeast corner of Section 30, T 38 N,
R 30 W, of the 4th Principal Meridian.

1. During the G.L.O. Survey of 1852, Mr. Edwin James Jr, a U.S. Deputy Surveyor, set a wood post to mark this corner.
2. A search of the Benton County Surveyor records provided no further information for the location of this corner.
3. On September 24, 1990, Paul E. Wellen & Associates, Inc., found a 3/4 inch iron pipe in the center line of Benton County Road 42 east and west and the center line of a township road north. We lowered said 3/4 inch iron pipe and places a cast iron monument at this location. We also established reference ties as indicated.

200721

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

DEC 18 1 47 PM '90

ALICE S. EMMERTMEYER
COUNTY RECORDER

BY *[Signature]* DEPUTY