

381318

Certified, Filed and or Recorded on
April 26, 2011 3:28 PM

BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

By: BW

6--V--I




CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 34, Township 38, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
- left monument as found lowered monument removed monument (explain)
- On 04/21/2011 placed an 1/2" X 14" IRON PIPE CAP # 19552

* FOUND Nails with
Bottle caps in.

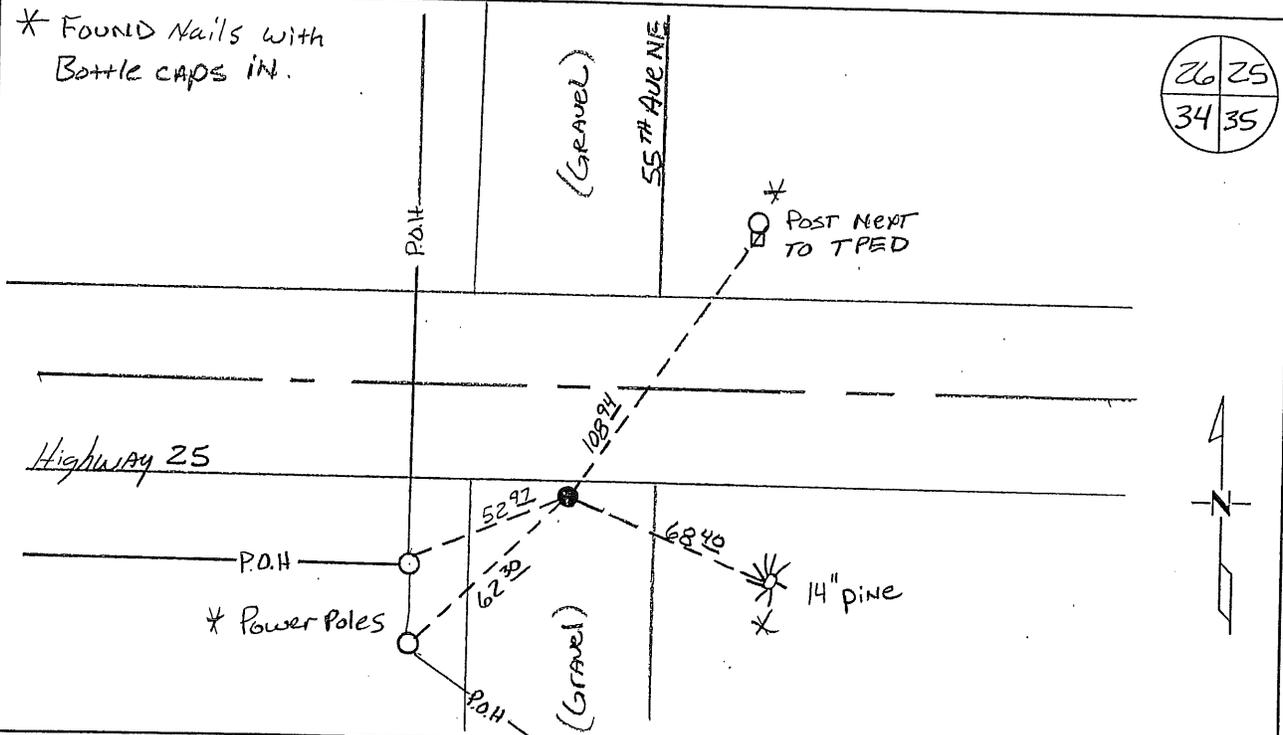

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstach
Benton County Surveyor
License No. 19552

Date: 4/22/2011

Benton County Surveyor's Office
 Jerome C. Wittstock, Deputy County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

C342

Northeast Corner of Section 34, Township 38 North, Range 30 West, Graham Township,
 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|-----------|--------|----------|
| 12" Aspen | S 70 E | 8 links |
| 12" Aspen | S 48 W | 12 links |
- 1927 County Engineer's Notebook No. 80 contains a road survey for State Road No. 218 by H. G. Elletson. Survey ran from west to east. Notes show corner marked by an iron monument (iron stake) in intersection of roads. Ties:
- | | | |
|----------|----|-------|
| Cor F.P. | SE | 49.5' |
| TP | SE | 36.3' |
- Undated County Surveyor's Record Book 2, page 224, notes an iron monument with 1927 and 1938 ties.
- 1938 County Engineer's Notebook No. 122 contains a road survey for CAR 24 running south from this corner. Notes show corner marked by an iron in intersection of roads. Ties:
- | | | |
|--------------|----|------|
| 12" Boxelder | SE | 44.0 |
| TP | NE | 75.5 |
- 1952 MN/DOT alignment map for TH 25 shows corner assumed in center of north-south and east-west roads with a distance of 38.0 feet south of the new centerline. Ties listed:
- | | | |
|----------|----|------|
| 12" Pine | SE | 63.9 |
| PP | SW | 61.8 |
- 1977 Paul Wellen, LS 10461, found an iron pin 8" below the surface that fit with county ties and was 38 feet south of the center line of TH 25. He filed a Certificate of Location (#147252) and notes a distance of 2662.27 feet to the East ¼ corner Sec 34.
- 2011 The Benton County Surveyor's Office found a railroad spike and a broken masonry nail near the corner position. The corner was positioned from the MnDOT alignment monuments fitting all 1977 ties within 0.4 feet. The MnDOT position and 1977 found iron pin are accepted as marking the obliterated corner position. A 1/2" by 14" iron pipe capped 19552 is set to mark the position, coordinates were obtained and reference ties established as shown.

Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-169783.769
 E-500433.606

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast _____ Corner of Section 34, Township 38, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On 6/16/77 found a Iron Pin 8" below surface
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES


Refer to next page

Statement of evidence relative to this corner location is on back of page. #147252

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Wellen 1/3/78
SIGNATURE DATE

Registration No. 10461

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Benton *County Recorder*

I hereby certify that this document was filed in the Reg. of Deeds office at 4P: .M. on the 10th day of January A.D., 19 78

Register of Deeds F. A. Johnson

By A. E. *County Recorder*, Deputy

DOCUMENT NO. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 34, Township 38, Range 30, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 6/16/77 found a IRON PIN 8" BELOW SURFACE
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

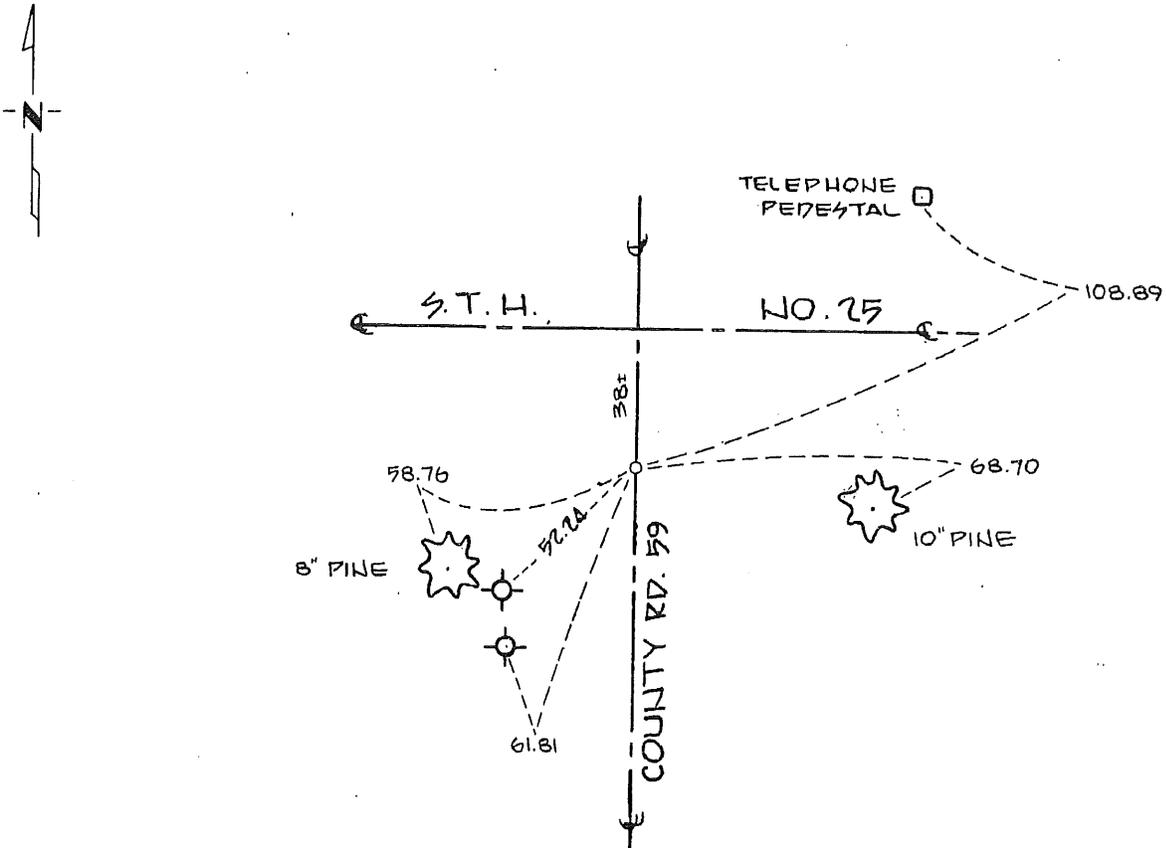

Statement of evidence relative to this corner location is on back of page.

147252

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul J. Hillen
SIGNATURE
1/3/78
DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 4 P. M. on the 10 day of January A.D., 19 78

Register of Deeds J. A. Johnson

By A. E. O., Deputy

DOCUMENT NO. _____

Found iron pin as per Benton County Engineer reference ties.

100

1

100

100

100

100

100