

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 6, Township 38, Range 28  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 11-18-08 found a CAST IRON MONUMENT

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

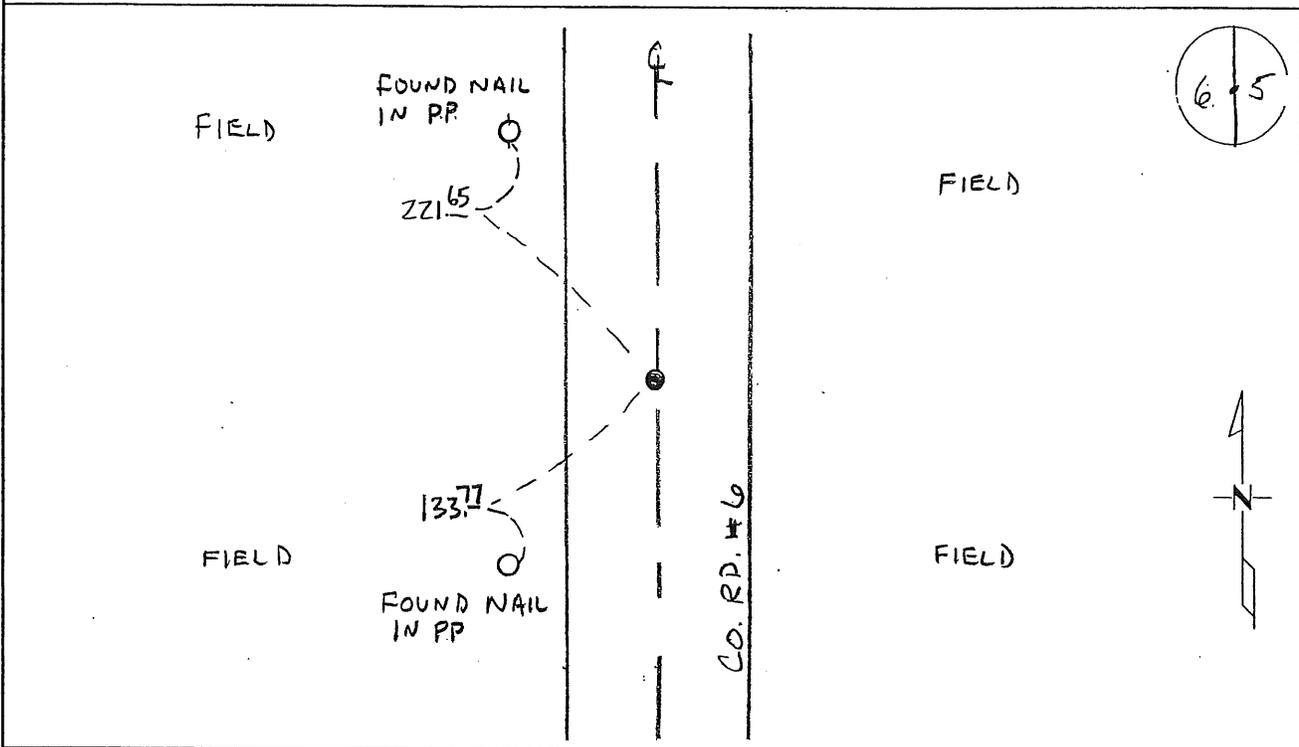

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Chris Hays  
Deputy County Surveyor  
License No. 43932

Date: 12/17/08

Benton County Surveyor's Office  
 Chirs Hoglund, Deputy County Surveyor  
 Minnesota License No. 43932

**Statement of Evidence:**

A063

The East Quarter Corner of Section 6, Township 38 North, Range 28 West, Granite Ledge Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- |               |        |          |
|---------------|--------|----------|
| 12" Black Ash | N 82 E | 10 links |
| 9" Bur Oak    | S 5 E  | 10 links |
- 1915 County Surveyor's Record Book 2, page 318, notes a survey of Section 5 by J.P Soderstrum. He set the corner on a true line and proportionate distance. He notes a distance of 41.96 chains to the NE Cor Sec 6 and a distance of 41.00 chains to the NE Cor Sec 7. He notes that no trees were near for new BT's. (Note: a distance of 82.02 chains is also noted for the mile).
- 1933 County Engineer's notebook No. 68 for SAR 6 does not show this corner and gives a distance of 5416.0 feet for the east line of Section 6.
- 1938 County Surveyor's Record Book 2, page 320, shows a survey of the NE ¼ of the NE ¼ by H. G. Elletson. Survey gives distance of 1467.8 feet along east line. A stake is given as marking the ¼ corner.
- 1953 County Engineer's Notebook No. 196 contains a road survey for SAR 6 running from south to north on section line. No corner is shown and gives a distance of 5417.8 feet for the east line of Section 6.
- 1982 William Lunser, LS 9394, set the corner on a straight line between section corners and at a distance 2682.96 feet north of the SE corner, determined by doubling the distance from the SE corner to a 40-acre fence line. He gives a distance of 2734.16 feet to the NE corner.
- 2008 Westwood Professional Services, Inc found a CIM in the centerline of County Road 6. Based on Lunser's distance for the east line of Section 6, the lost position would be 2676.77 feet north of the SE corner or 6.19 feet south of the corner set in 1982. Soderstrum's distances have usually been found to be reliable, but the difference in this case for the mile is 58.24 feet if using the 82.96 chains. This may explain the difference between the 82.02 chains and the 82.96 chains in the record, as the 82.02 chains agrees reasonably well. Soderstrum's lost position would then be 40.52 chains (2674.90 feet) north of the SE corner if using 82.02 chains. We measured 2682.81 feet north of the SE corner and 2734.17 feet south of the NE corner of Section 6. The CIM fits less than 8 feet of the 1915 Soderstrum position and seems to fit well with existing/accepted occupation. The CIM is accepted as marking the obliterated position for this corner.  
 County Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-193369.991  
 E-546772.879




# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 28th day of July, 1982  
 I did set the East Quarter corner of Section 6,  
Twp. 38, Rg. 28, Benton County, Minnesota, which  
 was evidenced by A line between the southeast and northeast  
corners of Section 6 and double the distance from the  
southeast corner of Section 6 to a 40 acre fence line North  
of said southeast corner.

I further certify that in order to perpetuate said corner I did  
 at the exact location thereof place a permanent marker consisting  
 of cast iron monument and that  
 I did establish witness or reference monuments as shown below:

*Handwritten notes:*  
 1. 1/4  
 2. 1/4  
 3. 1/4  
 4. 1/4  
 5. 1/4  
 6. 1/4  
 7. 1/4  
 8. 1/4  
 9. 1/4  
 10. 1/4  
 11. 1/4  
 12. 1/4  
 13. 1/4  
 14. 1/4  
 15. 1/4  
 16. 1/4  
 17. 1/4  
 18. 1/4  
 19. 1/4  
 20. 1/4  
 21. 1/4  
 22. 1/4  
 23. 1/4  
 24. 1/4  
 25. 1/4  
 26. 1/4  
 27. 1/4  
 28. 1/4  
 29. 1/4  
 30. 1/4  
 31. 1/4  
 32. 1/4  
 33. 1/4  
 34. 1/4  
 35. 1/4  
 36. 1/4  
 37. 1/4  
 38. 1/4  
 39. 1/4  
 40. 1/4  
 41. 1/4  
 42. 1/4  
 43. 1/4  
 44. 1/4  
 45. 1/4  
 46. 1/4  
 47. 1/4  
 48. 1/4  
 49. 1/4  
 50. 1/4  
 51. 1/4  
 52. 1/4  
 53. 1/4  
 54. 1/4  
 55. 1/4  
 56. 1/4  
 57. 1/4  
 58. 1/4  
 59. 1/4  
 60. 1/4  
 61. 1/4  
 62. 1/4  
 63. 1/4  
 64. 1/4  
 65. 1/4  
 66. 1/4  
 67. 1/4  
 68. 1/4  
 69. 1/4  
 70. 1/4  
 71. 1/4  
 72. 1/4  
 73. 1/4  
 74. 1/4  
 75. 1/4  
 76. 1/4  
 77. 1/4  
 78. 1/4  
 79. 1/4  
 80. 1/4  
 81. 1/4  
 82. 1/4  
 83. 1/4  
 84. 1/4  
 85. 1/4  
 86. 1/4  
 87. 1/4  
 88. 1/4  
 89. 1/4  
 90. 1/4  
 91. 1/4  
 92. 1/4  
 93. 1/4  
 94. 1/4  
 95. 1/4  
 96. 1/4  
 97. 1/4  
 98. 1/4  
 99. 1/4  
 100. 1/4

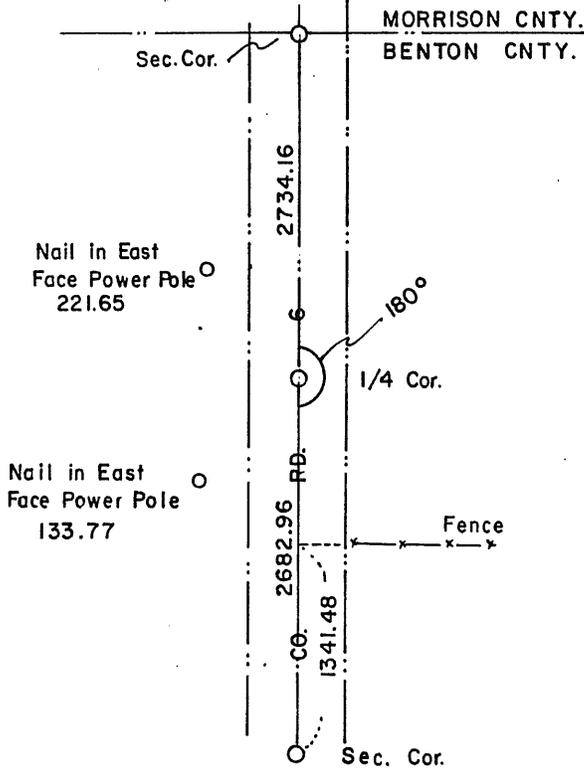

173445

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

*Walter J. Larson*

Minn. Registration No. 9394

Office of the County Recorder,  
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 16<sup>th</sup> day of May, 1985 at 30.71 m.

*Allice C. Engelmeier*  
 County Recorder

By \_\_\_\_\_ Deputy.