

MARILYN J. NOVAK  
COUNTY RECORDER  
BY CK DEPUTY

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

293732

2002 DEC 31 P 3: 56

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter \_\_\_\_\_ Corner of Section 27, Township 38, Range 28  
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 10/17/2002 found a 10' X 10' X 18' pointed stone with an 'X' on top  
DATE down 1.5 feet

left monument as found     lowered monument     removed monument (explain)

On 10/17/2002 placed a cast iron monument on top of the stone  
DATE

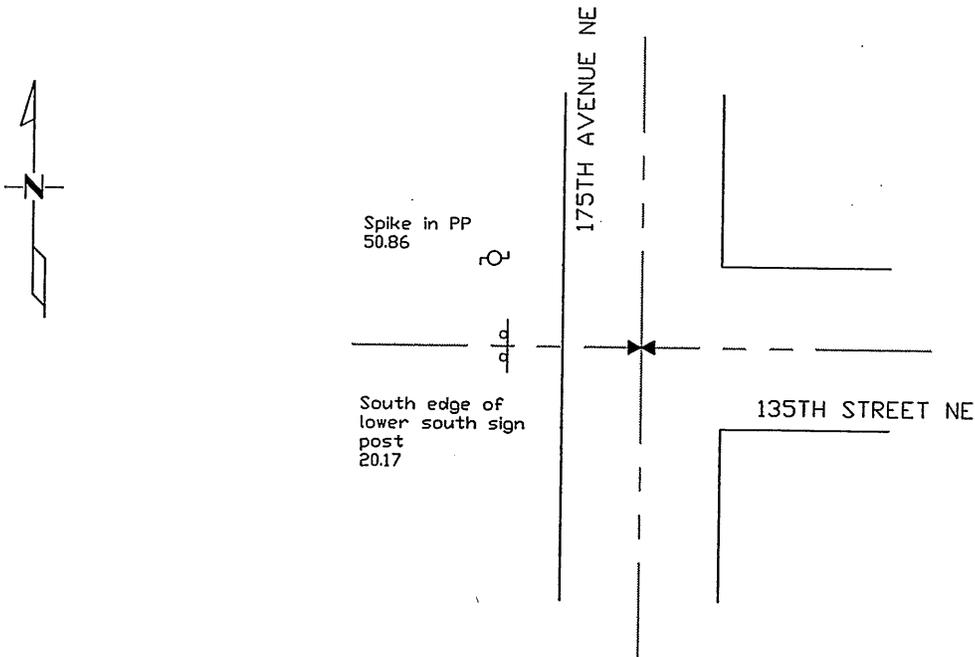

New tree and power pole ties are to the head of a nail with a brass disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature] Date 11/25/02 License No. 12684

Title:  Land Surveyor     Professional Engineer     County Surveyor     County Engineer

**Statement of Evidence:**

**A273**

The East Quarter Corner of Section 27, Township 38 North, Range 28 West, Granite Ledge Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

In 1855, Oscar F. Davis set a wood post at this location and bearing trees were recorded.

8" Blk Oak	N 87 E	21 links
10" Elm	N 68 1/2 W	24 links

The County Surveyors records in Book 2, page 362 note a stone at the corner location.

In May 1915, J.P. Soderstrum notes on Map No 13 that he found the old tamarack post, which was set by Whilt from Gov't B.T.'s. Testimony notes the corner is in the same place as when set in 1899. He notes a distance of 38.87 chains to the NE Cor Sec 27 (stone). He then set a stone with an "X" at the location. He also notes a reference tie of

larger boulder with an "X" marked W.C.	N 89 E	440
--	--------	-----

On 10/17/02 Westwood Professional Services, Inc. dug with a backhoe and found a 10" x 10" x 18" pointed stone with an + on top down 1.5 feet.

On October 24, 2002 Westwood Professional Services, Inc. set a cast iron monument over the stone and established reference ties.

**Coordinates**

NAD 83 (1996 Adjustment)

N-172285.601

E-562981.857