

1-6

A 362857

Certified, Filed and or Recorded on
JAN. 06, 2009 AT 02:53PM


Signed: CK
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 6, Township 38 N, Range 28 W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 4-26-2007 found a Concrete Monument with iron pin marked "1/4"
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed a _____
DATE

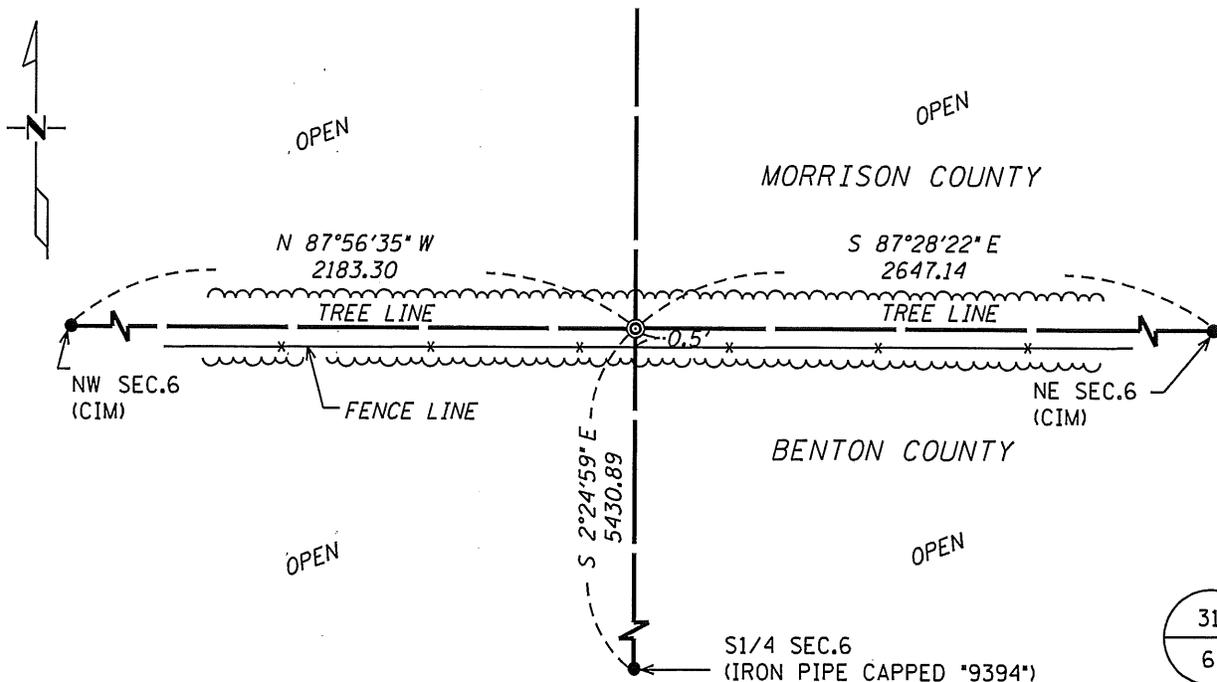

31
6

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature Saul J. DeLeo Date 9-2-2008 License No. 40341
 Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

A061

The North Quarter Corner of Section 6, Township 38 North, Range 28 West, Granite Ledge Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|---------|--------|----------|
| 8" Pine | N 62 W | 5 links |
| 8" Pine | S 70 E | 30 links |
- 1919 Nels Peterson, Morrison County Surveyor, notes he set a concrete monument at all government corners along the south line of Lakin Township in Morrison County.
- 1986 Thomas Thiessen, LS 16097, with Comstock & Davis found a concrete monument marked with "1/4" on top and an iron pin in the center. Monument accepted as the one set by Peterson in 1919. Filed Certificate of Location in Morrison County (Doc. No. 307824).
- 2007 Sam DeLeo, LS 40341 found a concrete monument marked with "1/4" on top and an iron pin in the center. Thiessen's 1986 ties were not found. The location of the monument measured 2183.30 feet to the NW corner of the section and 2647.14 feet to the NE corner of the section. Coordinate values were established on the monument.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 196,217.997
 E- 544,002.564