

A 362856

Certified, Filed and or Recorded on
JAN. 06, 2009 AT 02:52PM


Signed: CK
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 7, Township 38 N, Range 28 W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 4-26-2007 found a 1/2" Dia. Iron Pipe with cap "RLS 9394"
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed a _____
DATE

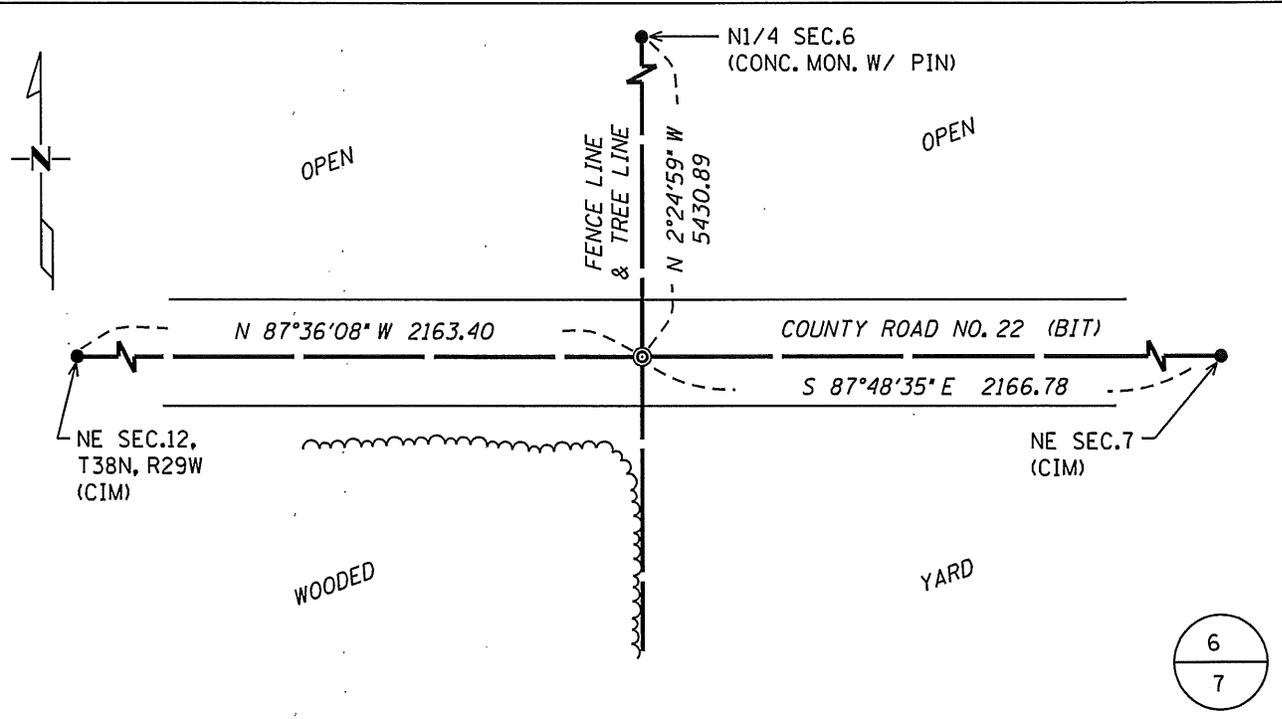

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature Samuel J. DeBo Date 9-2-2008 License No. 40341
Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

A071

The North Quarter Corner of Section 7, Township 38 North, Range 28 West, Granite Ledge Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|------------|--------|----------|
| 8" W Birch | N 62 W | 10 links |
| 17" Sugar | S 40 E | 37 links |
- 1939 County Engineer's Notebook No. 128 contains survey of CAR 22 running east to west on section line. Corner is shown as a spike set in center of road in line with fences north and south. Ties:
- | | | |
|----------|----|-------|
| 8" Pop. | NW | 54.8' |
| 3" Birch | N | 35.6' |
- Stationing gives distances of 2666.0 feet to the NE corner and 2164.0 feet to the NW corner with a delta angle of 0-14' right.
- 1963 County Engineer's Notebook No. 249 contains survey of CAR 22 running west to east on section line. Corner is shown as a spike set in center of road in line with a fence line north. Notes fence line south being 9 feet east. Ties:
- | | | |
|--------------------|----|------|
| 1 st FP | N | 43.1 |
| TP | SW | 47.6 |
- Stationing gives distances of 2664.4 feet to the NE corner and 2166.9 feet to the NW corner with a delta angle of 0-13' left.
- 2001 Westwood Professional Services, Inc. found a ½" open iron pipe in center of east-west road and tree line north.
- 2002 No resurvey information has been found on this corner in the Benton County Surveyor's records.
- 2007 Sam DeLeo, LS 40341 found a ½" diameter iron pipe with cap stamped "RLS 9394" (William Lunser) at the intersection of the fence line north and the E-W centerline of Co Rd 22. Mr. Lunser was contacted and stated that he replaced a found iron at the corner with his. The pipe measured 2163.40 feet east of an iron pipe at the NW corner of the section and 2666.78 feet west of a CIM at the NE corner of the section with a deflection angle of 0°12'27" Rt. (E to W). The site was not excavated. The location fits well with the 1939 and 1963 distances to corresponding section corners E-W. Coordinate values were established on the pipe.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 190,791.947
 E- 544,231.526