

12-24

A 362614

Certified, Filed and or Recorded on  
Dec. 26, 2008 AT 10:33AM

Signed: CK  
MARILYN J NOVAK V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

## DOCUMENT COVER SHEET

Document Name: **GOVERNMENT CORNER**

**BENTON COUNTY OF**

**THE PUBLIC**

Document Date: **12/17/2008**

This cover sheet is being attached to this document to provide room for recording information and is considered part of this document

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 8, Township 38, Range 28  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 11-18-08 found a CAST IRON MONUMENT

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

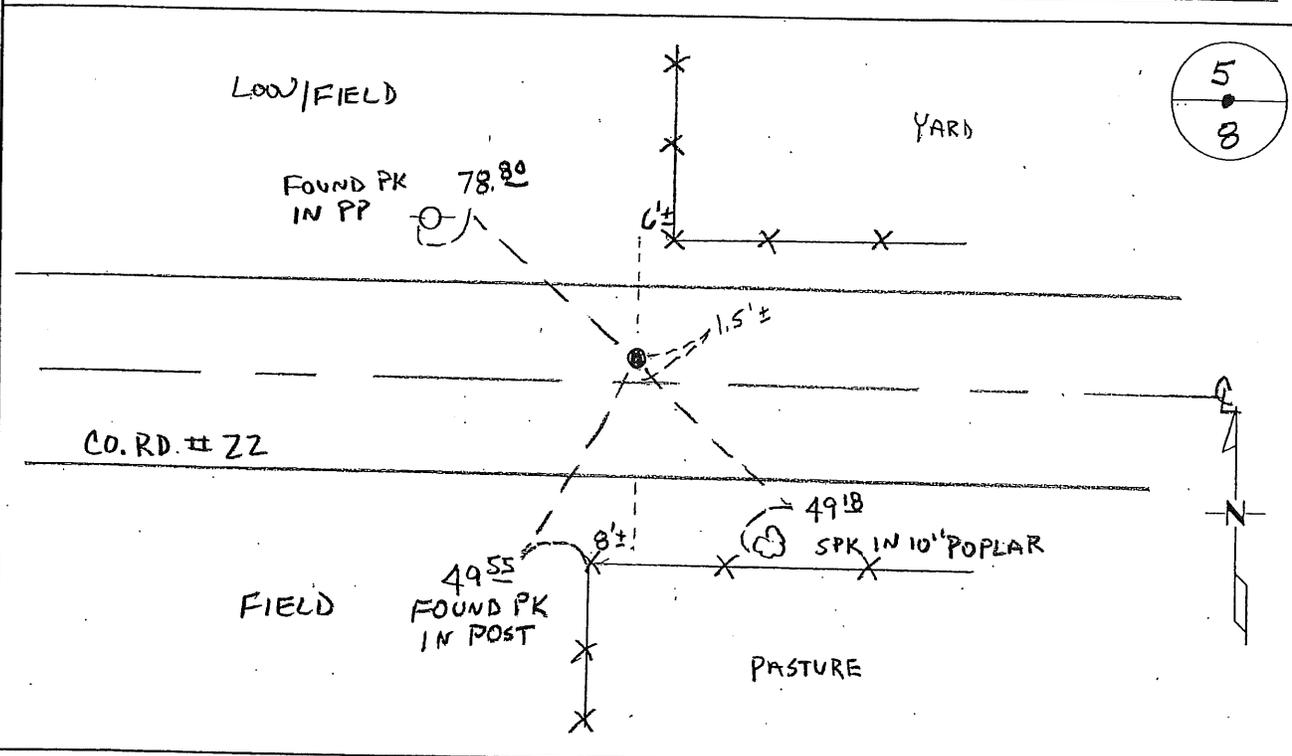

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
 Deputy County Surveyor  
 License No. 43932

Date: 12/17/08

Benton County Surveyor's Office  
 Chirs Hoglund, Deputy County Surveyor  
 Minnesota License No. 43932

**Statement of Evidence:**

A081

North Quarter Corner of Section 8, Township 38 North, Range 28 West, Granite Ledge Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- |            |            |          |
|------------|------------|----------|
| 9" Maple   | N 36 1/2 W | 16 links |
| 10" B. Oak | S 58 1/2 W | 21 links |
- 1913 County Surveyor's Record Book 2, page 306, contains a survey of a town road on the north line of Section 8 by M. J. Cleveland that shows corner found OK and notes distances of 2676 feet to the NW corner and 2687 feet to the NE corner.
- 1915 County Surveyor's Record Book 2, page 318, and County Surveyor's Record Book A, Map No. 4, shows a survey of Section 5 by J.P. Soderstrum. He notes an iron in the centerline of a road for the corner.
- 1939 County Engineer's Notebook No. 128 contains survey of CAR 22 running west to east on section line. No corner is shown, but stationing gives distances of 2660.1 feet to the NE corner and 2700.0 feet to the NW corner to a fence line north.
- 1963 County Engineer's Notebook No. 249 contains survey of CAR 22 running west to east on section line. No corner is shown, but stationing gives distances of 2677.3 feet to the NE corner and 2682.7 feet to the NW corner to a fence line south.
- 2001 Westwood Professional Services, Inc. set a 1/2" iron monument capped RLS #23002 at the centerline of County Road 22 (running east and west) and a fence line from the north. Corner is 2677.62 feet from the NW corner and 2684.41 feet from the NE corner.
- On September 21, 2001 Westwood Professional Services, Inc. found the 1/2" iron monument capped RLS #23002 and removed the iron and placed a cast iron monument at the location and established reference ties.
- 2008 Westwood Professional Services, Inc. found a CIM 1.5 feet north of the centerline of County Road 22. Measured 2677.88 to the NW corner and 2684.28 to the NE corner of Section 8 with agrees with 1913 and 1963 county records. CIM is accepted as marking the obliterated position for this corner.  
 County Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-190670.214  
 E-549574.104