


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 11, Township 38, Range 28  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 11-18-08 found a 3/8" REBAR
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

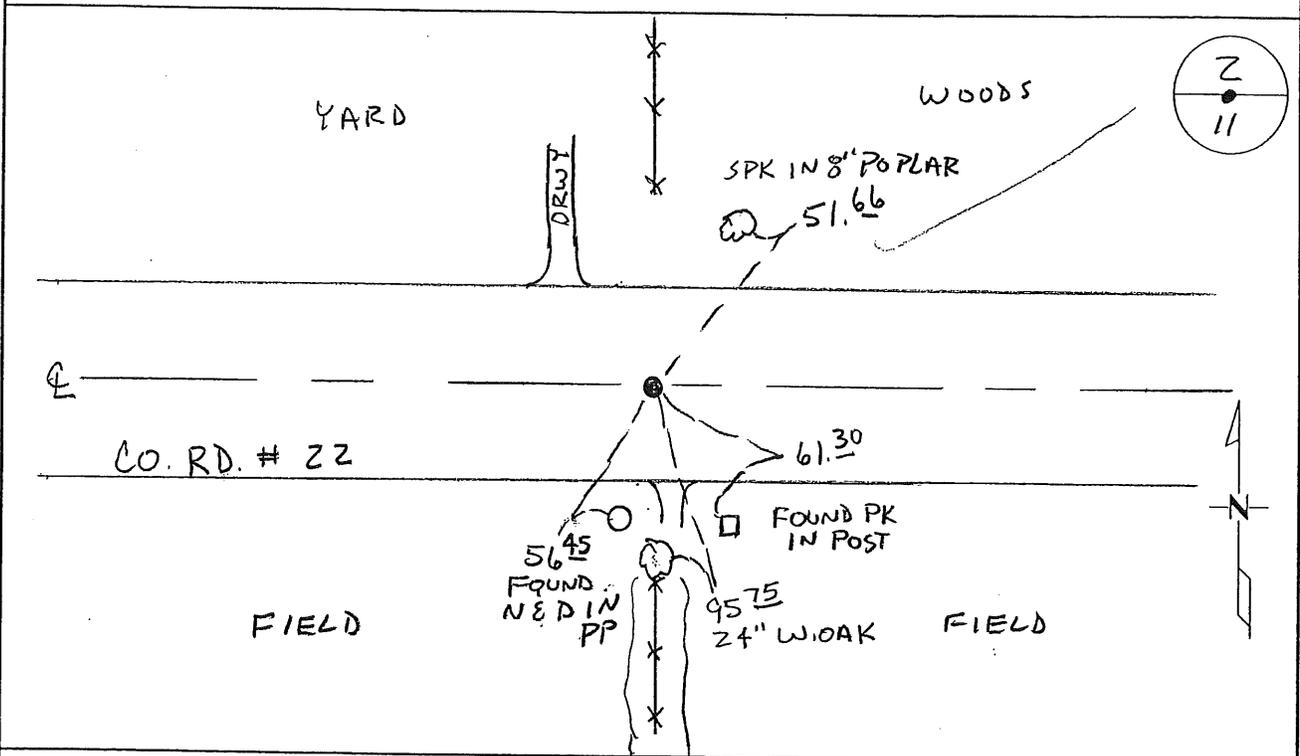

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Ch. Hozler  
Deputy County Surveyor  
License No. 43932

Date: 12/17/08

Benton County Surveyor's Office  
 Chris Hoglund, Deputy County Surveyor  
 Minnesota License No. 43932

**Statement of Evidence:**

A111

North Quarter Corner of Section 11, Township 38 North, Range 28 West, Granite Ledge Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

16" Bur Oak	S 1 E	25 links
8" Sugar	N 46 E	16 links

1901 County Road Book, pages 206 and 266, shows road surveyed by John Whilt, County Surveyor, running north and east from this corner.

1967 County Engineer's Notebook No. 267 contains survey of CSAH 22 running west to east on section line. Corner is shown as an iron in center of road in line with fence lines north and south. Ties:

PP	S	56.5'
12" Elm	NW	91.15'
20' Elm	NW	81.75'
12" Oak	S	96.75'

Stationing gives distances of 2644.1 feet to the NW corner and 2645.7 feet to the NE corner with deflection angle of 0-05' right.

(County Surveyor's Record Book 2, page 330, shows same ties.)

1973 William Lunser, LS 9394, set a 1/2 " iron pipe at the intersection of road east-west and fences north-south and filed Certificate of Location (Doc. No. 137341). Notes that position is supported by measurements of 2643.85 feet to the NW corner and 2646.73 feet to the NE corner of Section 11.

2005 WSN found a rebar in east-west road. Measured 2643.60 feet to the NW corner and 2647.00 feet to the NE corner.

County Coordinates obtained by GPS:

NAD 83 (1996 Adjustment)

N- 190723.201

E- 565221.935

2008 Westwood Professional Services, Inc. found a 3/8" rebar in the centerline of C.S.A.H No. 22 and in line with fences north and south. Field crew found two of the 1967 County Engineer's ties with fit the rebar well. Rebar is accepted as marking the obliterated position for this corner. Coordinates for the rebar and distances to the NW and NE section corners both obtained by GPS coincide with 2005 WSN information.

12-24

A 362617

Certified, Filed and or Recorded on  
Dec. 26, 2008 AT 10:35AM

Signed: CK  
MARILYN J NOVAK ~~E~~ V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

## DOCUMENT COVER SHEET

Document Name: **GOVERNMENT CORNER**

**BENTON COUNTY OF**

**THE PUBLIC**

Document Date: **12/17/2008**


This cover sheet is being attached to this document to provide room for recording information and is considered part of this document

*Granite Ledge*

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 12<sup>th</sup> day of December, 1973  
I did find \_\_\_\_\_ the north quarter corner of Section 11,  
Twp. 38, Rg. 28, Benton County, Minnesota, which  
was evidenced by \_\_\_\_\_ intersection of road east and west and fence  
line north and south, supported by measurements east and west.

I further certify that in order to perpetuate said corner I did  
at the exact location thereof place a permanent marker consisting  
of 1/2 inch iron pipe and that  
I did establish witness or reference monuments as shown below:

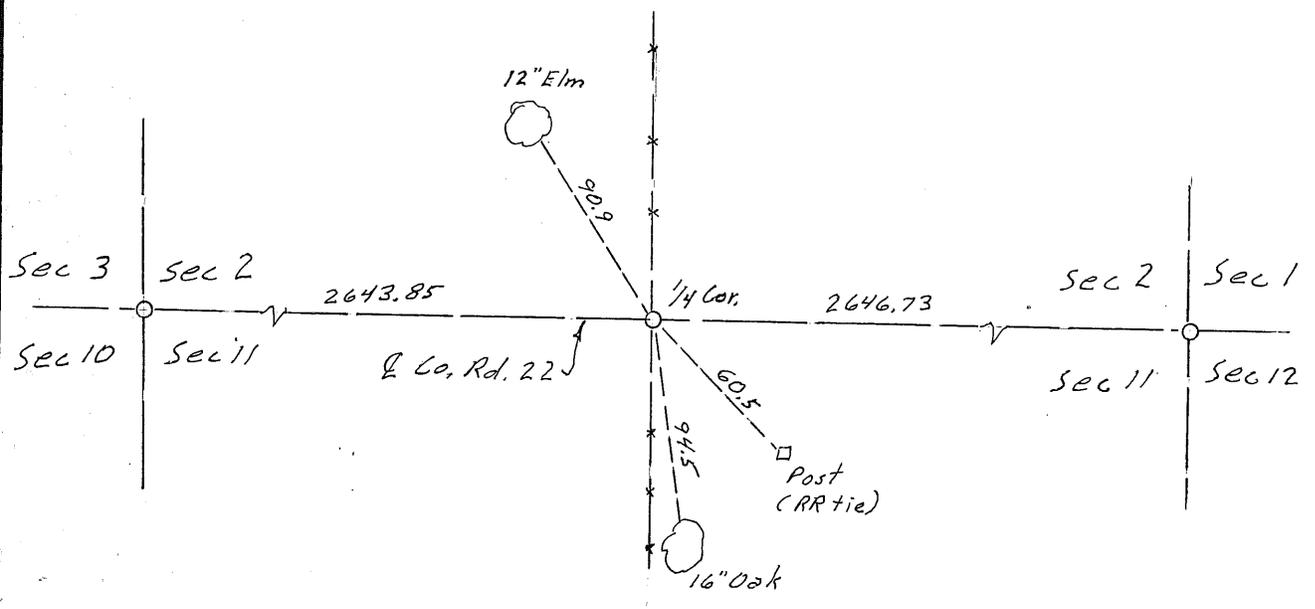

137341

~~137441~~

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

*William F. Jensen*

Minn. Registration No. 9394

Office of the Register of Deeds, Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 9<sup>th</sup> day of August 10 A.M., 1974.

*F. J. Johnson*  
Register of Deeds

By \_\_\_\_\_ Deputy.