

A 362858

Certified, Filed and or Recorded on
JAN. 06, 2009 AT 02:54PM


Signed: CK
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 6, Township 38 N, Range 28 W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 4-26-2007 found a Cast Iron Monument over a concrete monument.
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed a _____
DATE

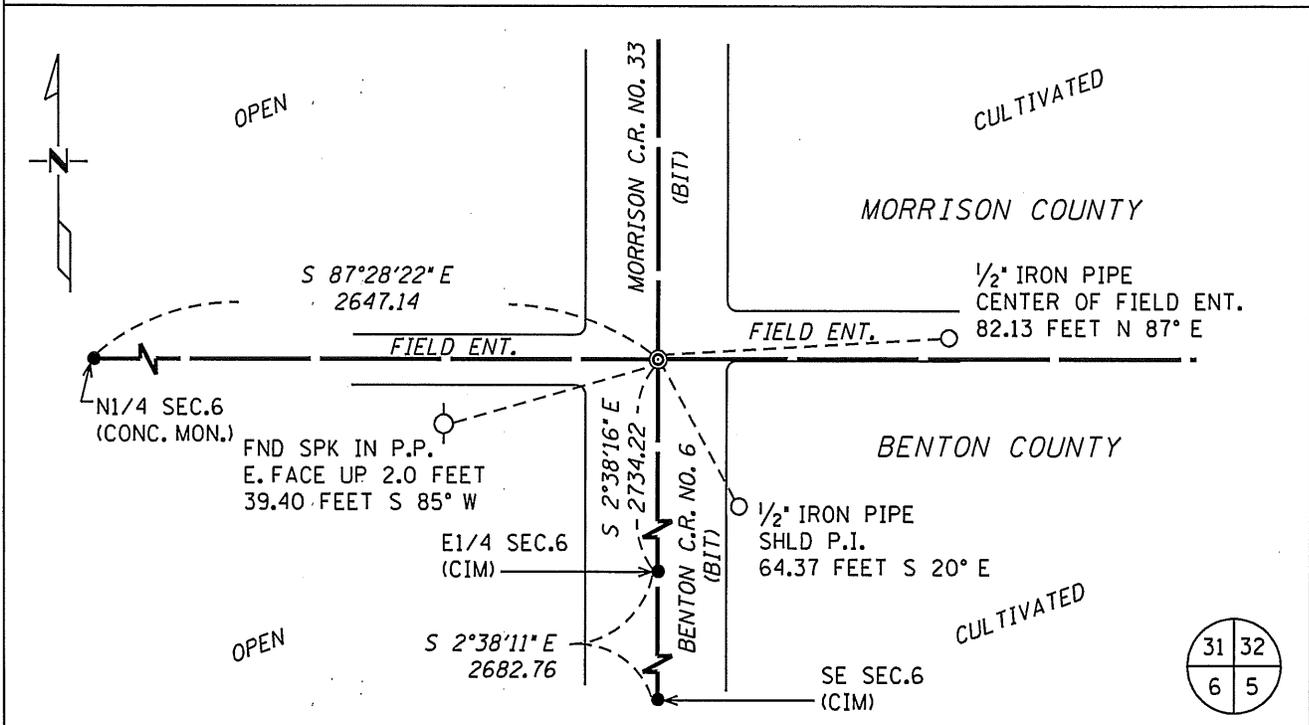

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature S. J. DeLo Date 9-2-2008 License No. 40341
 Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence

A062

Northeast Corner of Section 6, Township 38 North, Range 28 West, Granite Ledge Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

8" Blk Oak	N 85 W	41 links
8" Blk Oak	N 69 E	43 links
12" Poplar	S 72 E	10 links
12" Poplar	S 72 W	10 links

A line tree is noted 6" Tamarack, West, 19.46 chains.

1914 Morrison County Surveyor's Record Book A, on page 157, shows a survey by Phil S. Randall of Section 32, 39-28 for laying out road along west line. This corner is shown marked by stake.

1914 Benton County Surveyor's Record Book 2, page 318, and Record Book a, Map No. 4 notes a survey of Section 5 by J.P. Soderstrum. He found a maple stake as set by the surveyor for Morrison County. He found no BT's but found that the stake did check with an oak stump NW, although it did not have any markings. Right of way had been cleared for road to the north. He made new ties:

8" Sugar	S 43-30 E	134 ½ links
12" B. Oak	N 81-30 E	237 ½ links

1915 County Surveyor's Record Book 2, page 318, notes a survey of Section 5 by J.P. Soderstrum.

1919 Nels Peterson, Morrison County Surveyor, notes he set a concrete monument at all government corners along the south line of Lakin Township in Morrison County.

1933 County Engineer's notebook No. 68 for SAR 6 shows round rock at corner with ties:

F.P.	E	22.9'
Pop.	NW	65.0'

Stationing shows corner 5416.0 feet north of the SE corner. Notes show fence line east.

1938? County Surveyor's Record Book 2, page 320, shows a survey of the NE ¼ of the NE ¼ by H. G. Elletson. Survey gives distance of 1309 feet along north line and 1467.8 feet along east line.

Other notes on same page show ties: to round rock:

F.P.	East	22.9
Pop.	NW	65.0

1953 County Engineer's Notebook No. 196 contains a road survey for SAR 6 running from south to north on section line. Corner is shown marked by a stone in center of road with fence line east:

Ties to stone:

5" W. Oak	East	68.0
13' north of field entrance West		

Northeast Corner of Section 6, Township 38 North, Range 28 West, Continued ...


- 1982 William Lunser, LS 9394, found a $\frac{3}{4}$ " iron pin in the centerline of county road running north-south and in line with field line east. Set a cast iron monument and filed a Certificate of Location (Doc. No. 173439).
- 2003 County Coordinates Obtained by GPS to CIM
NAD 83 (1996 Adjustment)
N- 196101.269
E- 546647.133
- 2007 Sam DeLeo, LS 40341 verified the coordinates of the CIM that was surveyed in 2003. He excavated the site by hand and found a concrete monument below the CIM. The CIM was replaced and reference ties were recorded. The location of the CIM measures 5416.96 feet north of the southeast corner of said Section 6. This distance corresponds well with Soderstrum's 1915 distance of 5417.3'. The location of the CIM measures 1323.58 feet east of the NW corner of the NE1/4 NE1/4 and 1398.83 feet north of the SE corner of the NE1/4 NE1/4. These distances do not compare well with Elletson's 1938 distances of 1309 feet and 1467.8 feet respectively. Elletson's survey shows iron monuments and a stake being set along the north and south lines of the NE1/4 of the NE1/4. None of these monuments could be found.

County Coordinates Verified by GPS to CIM
NAD 83 (1996 Adjustment)
N- 196101.269
E- 546647.133

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 28th day of July, 1982
 I did find the northeast corner of Section 6,
 Twp. 38, Rg. 28, Benton County, Minnesota, which
 was evidenced by a 3/4" pin at the centerline of a County
Road running North and South and a field
line running East.

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of cast iron monument and that
 I did establish witness or reference monuments as shown below:

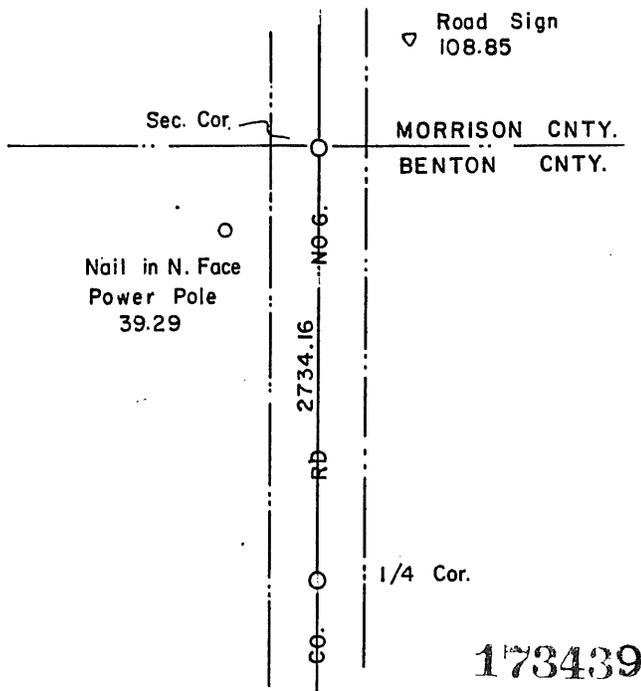

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

William J Jensen

Minn. Registration No. 9394

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 16th day of May, 1985 at 3:00 PM

Alice C. Engelmeyer
 County Recorder

By _____ Deputy.

This p. is possibly set by county
 WNW
 5
 NE NE
 38-28