

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH EAST Corner of Section 10, Township 38, Range 28
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 11-18-08 found a RR. SPIKE

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

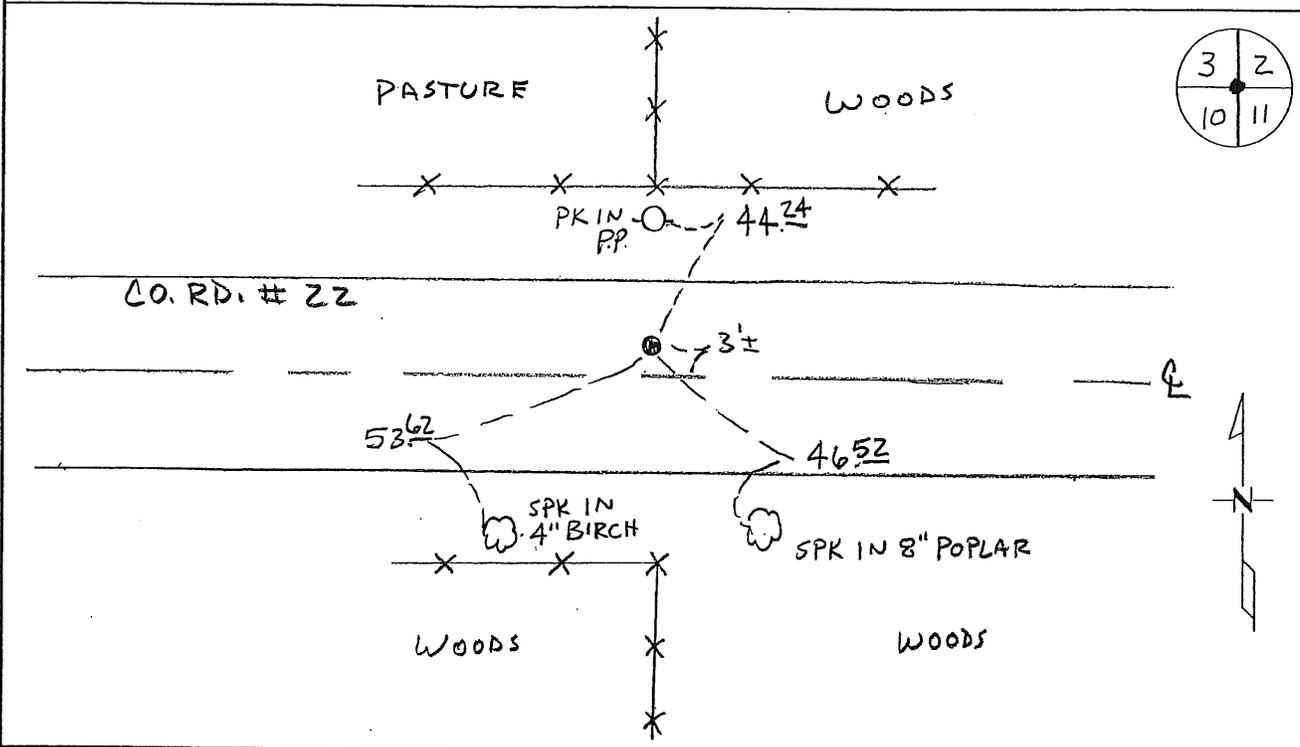

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 12/17/08

Statement of Evidence:

A102

Northeast Corner of Section 10, Township 38 North, Range 28 West, Granite Ledge Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

16" Sugar	N 85 1/2 W	30 links
12" Birch	N 42 1/2 E	34 links

1967 County Engineer's Notebook No. 267 contains survey of CSAH 22 running west to east on section line. Corner is shown as iron in center of road in line with fence lines north and south. Ties:

PP	North	33.6
12" W. Oak	NE	77.95
4" R. Oak	South	44.9

1973 William Lunser, LS 9394, set a RR spike for the corner at the intersection of the center of east-west road and fence lines north-south. Filed Certificate of Location (Doc. No. 137344) which shows 12" Oak NE 77.08.

2005 BWK located RR spike by GPS.

County Coordinates
NAD 83 (1996 Adjustment)
N- 190677.034
E- 562578.742


2008 Westwood Professional Services, Inc. found a railroad spike ~3 feet north of the centerline of County Road 22 and on line with fences north and south. Field crew noted finding an oak stump fitting 1967 tie and two stumps from Lunser's 1973 certificate. Railroad spike is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2005 BWK position.

Granite Ledge

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 12th day of December, 1973
I did Re-establish the northeast corner of Section 10,
Twp. 38, Rg. 28, Benton County, Minnesota, which
was evidenced by intersection of road east and west and fence
line north and south

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of RR Spike and that
I did establish witness or reference monuments as shown below:

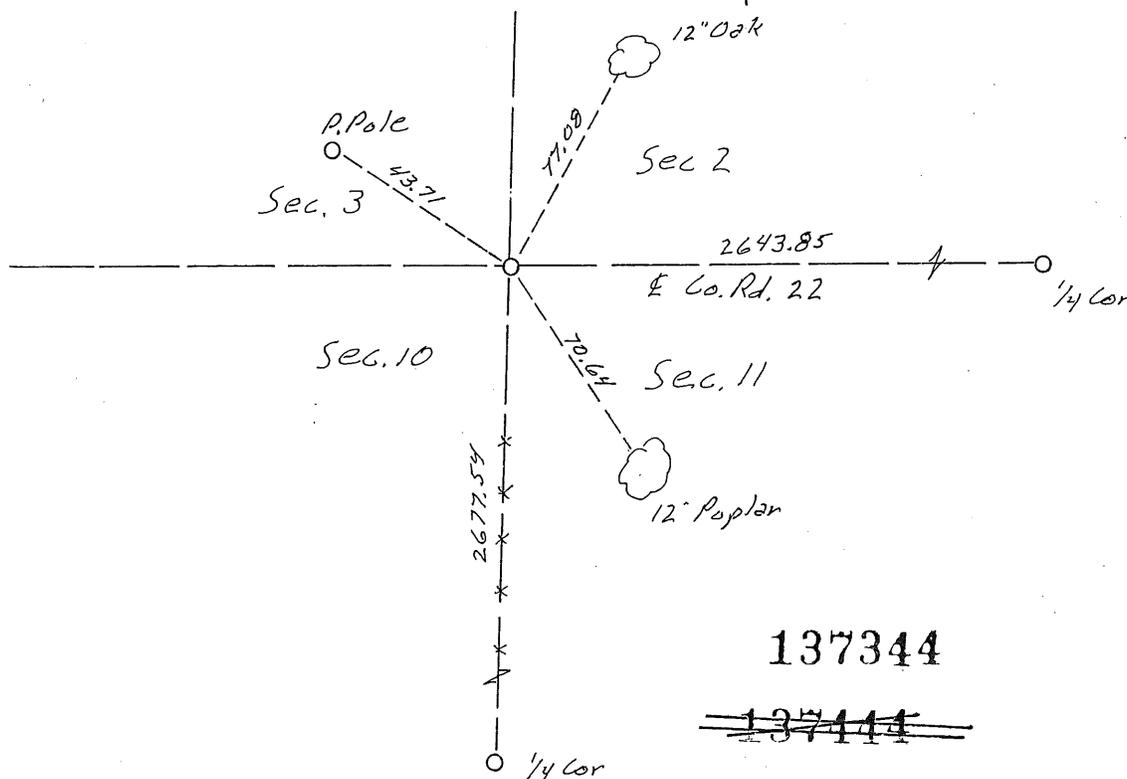

137344

~~137444~~

I hereby certify that the
above is true and correct
and that I am a registered
Land Surveyor under the laws
of the State of Minnesota.

William F. Jensen

Minn. Registration No. 9394

Office of the Register of Deeds,
Benton County, Minn.

I hereby certify that the within
instrument was filed for record
in this office on the 9 day of
August at 10 A.M., 1974.

F. C. Johnson
Register of Deeds

By _____ Deputy.