

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH EAST Corner of Section 11, Township 38, Range 28
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 11-19-08 found a 1/2" REBAR

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

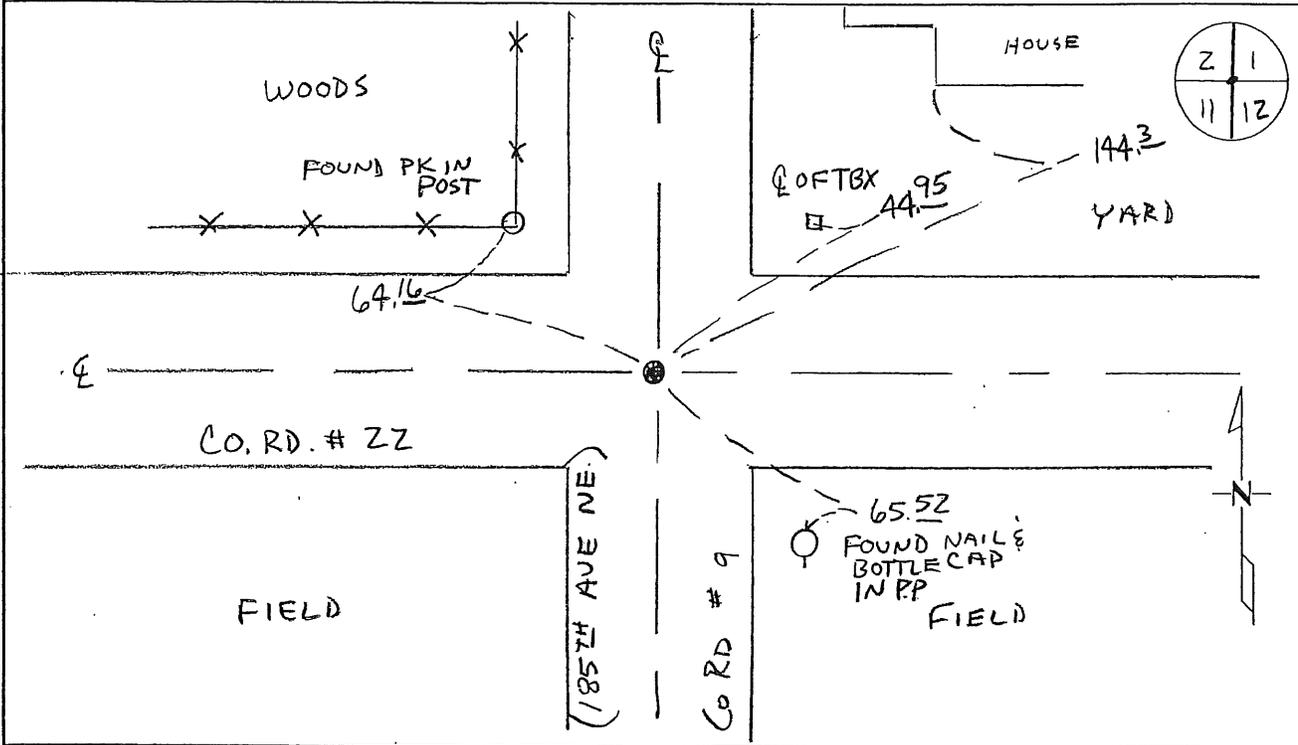

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 12/17/08

Benton County Surveyor's Office
Chris Hoglund, Deputy County Surveyor
Minnesota License No. 43932

Statement of Evidence:

A112

Northeast Corner of Section 11, Township 38 North, Range 28 West, Granite Ledge Township, 4th Principal Meridian, Benton County, Minnesota.


- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|-------------|------------|----------|
| 10" W Birch | S 87 W | 12 links |
| 10" Sugar | N 21 1/2 E | 37 links |
- 1901 County Road Book, pages 206 and 266, shows road surveyed by John Whilt, County Surveyor, running west and south from this corner.
- 1937 County Engineer's Notebook No. 82 contains a road survey for SAR No. 9 running south to north and terminating at this corner. Notes show corner marked by an iron with road east-west. Ties:
- | | |
|------------|--------|
| Cor. FP SE | 38.8' |
| Cor. FP NE | 22.15' |
- 1957 County Surveyor's Record Book 2, page 330, contains ties to an iron that are the same as listed above in 1937 and below in 1967.
- 1962 County Engineer's Notebook No. 269 contains a road survey for CSAH No. 9 running south to north. Notes show corner marked by an iron in center of road intersection. Same ties as listed below in 1967.
- 1967 County Engineer's Notebook No. 267 contains survey of CSAH 22 running west to east on section line. Corner is shown as an iron in center of 4-way road intersection. Ties:
- | | | |
|----------------------|----|--------|
| T.P. | NW | 42.3' |
| PP | SE | 49.2' |
| SW Cor. House Found. | NE | 110.8' |
- 1973 William Lunser, LS 9394, found an iron monument in road intersection. Left monument as found and filed a Certificate of Location (Doc. No. 137342). Tie to SW corner of house foundation is NE 110.92'. Distances shown on Certificate: 2646.73 feet to the North 1/4 corner of Section 11 and 2649.70 feet to the East 1/4 corner of Section 11.
- 2004 Dan Kron, LS 42621, reported using corner for survey in Section 1. Ties:
- | | | |
|--------------------|----|--------|
| PP (PK Nail) | SE | 65.6' |
| Cor. FP (PK Nail) | NW | 64.16' |
| Tel Ped. (PK Nail) | NE | 43.07' |
- 2005 WSN found rebar in road intersection. County Coordinates obtained by GPS NAD 83 (1996 Adjustment)
N- 190768.118
E- 567868.555
- 2008 Westwood Professional Services, Inc. found a 1/2" rebar in road intersection north/south/east/west. We found one 1973 tie remaining and measured 2647.00 feet to the N1/4 and 2649.55 feet to the E1/4 of Section 11 which agrees with Lunser information. Rebar is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2005 WSN position.

Granite Lodge

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 12th day of December, 1973
I did find _____ the northeast _____ corner of Section 11,
Twp. 38, Rg. 28, Benton _____ County, Minnesota, which
was evidenced by _____ iron monument at intersection of roads north,
south, east and west.

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of _____ (left as is) _____ and that
I did establish witness or reference monuments as shown below:

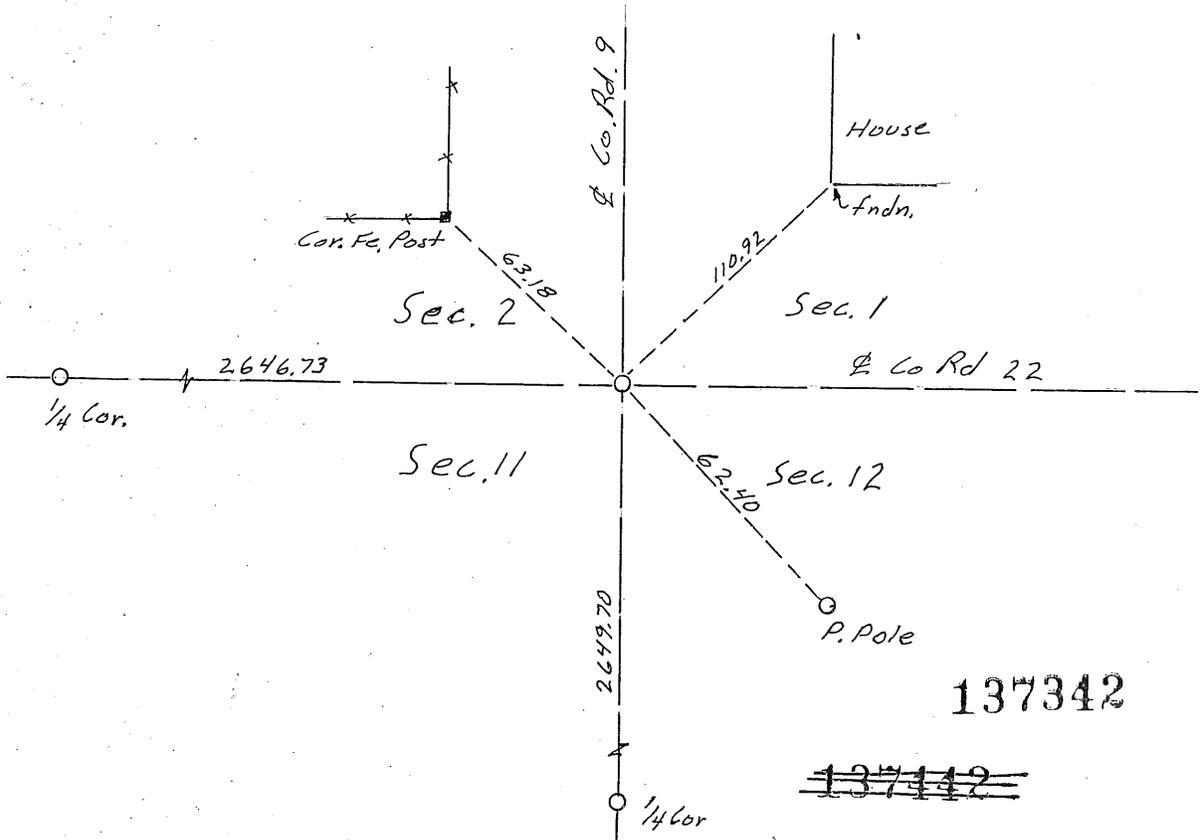

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

William F. Lerner

Minn. Registration No. 9394

Office of the Register of Deeds, Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 9th day of August 10 A.M., 1974.

F. G. Johnson
Register of Deeds

By _____ Deputy.