

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH EAST Corner of Section 13, Township 38, Range 28  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 11-19-08 found a CAST IRON MONUMENT

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

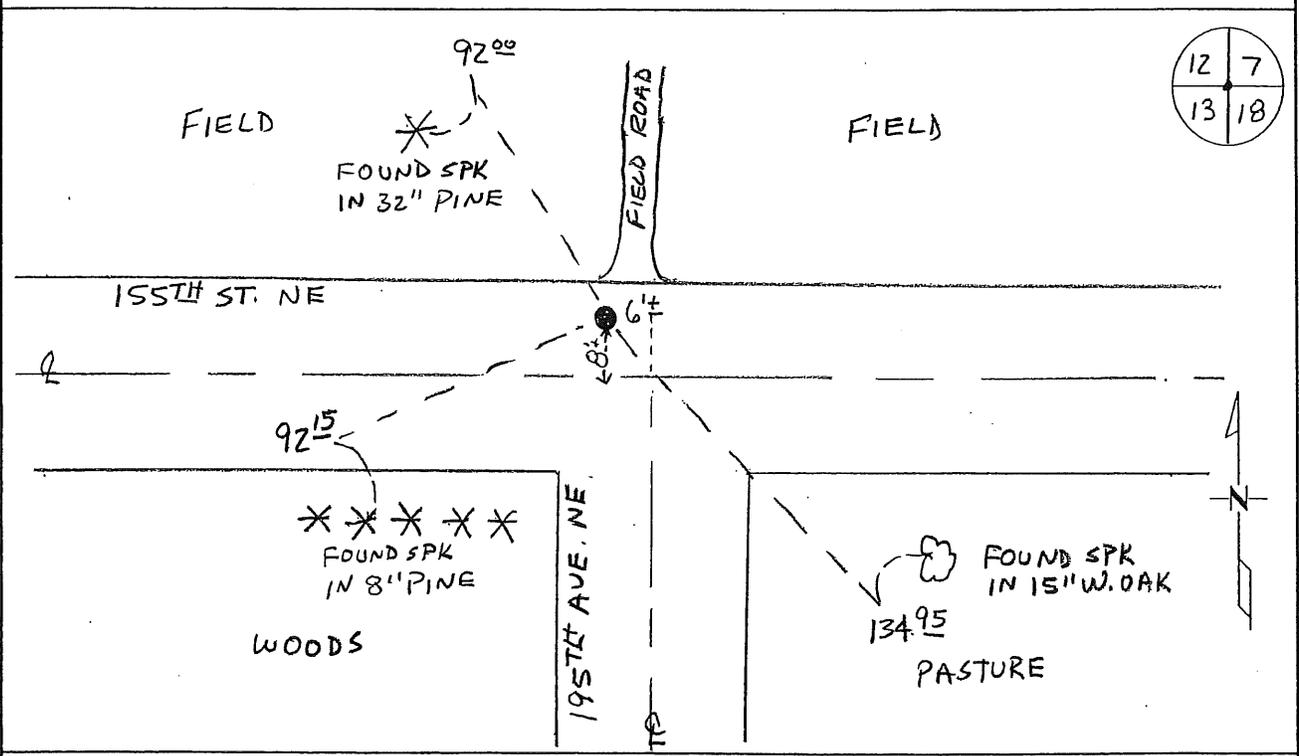

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 12/17/08

Benton County Surveyor's Office  
 Chris Hoglund, Deputy County Surveyor  
 Minnesota License No. 43932

**Statement of Evidence:**

A132

The Northeast Corner of Section 13, Township 38 North, Range 28 West, Granite Ledge Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

12" Sugar	S 68 E	21 links
10" Sugar	N 23 E	45 links
8" Sugar	N 68 W	58 links
8" Sugar	S 45 W	39 links

No Date County Surveyor's Record Book 2, page 334, (Old) lists new BT's:

10" W. Pine	S 25 ½ W	138 links
7" W. Pine	S 42 ½ E	273 links

1996 John Oliver, LS 8194, Mille Lacs County Surveyor set corner at single proportion distance based on Judicial Road survey. He set a CIM and filed Certificate of Location (Doc. No. 244637). See his statement of evidence for details County Coordinates from John Oliver & Associates by traverse:

NAD 83 (1986 Adjustment)

N- 185480.368

E- 573307.800

2001 Dennis Pederson, LS 16095, used CIM for survey in Section 13.

2008 Westwood Professional Services, Inc. found a CIM fitting 1996 Oliver ties. After analysis of the statement of evidence from Oliver's certificate, I agree with his method of perpetuating this corner. CIM is accepted as marking the obliterated position for this corner.

County Coordinates Obtained by GPS

NAD 83 (1996 Adjustment)

N- 185480.986

E- 573307.336

A 362616

Certified, Filed and or Recorded on  
Dec. 26, 2008 AT 10:34AM

Signed: CK  
MARILYN J NOVAK ~~B V I~~  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

## DOCUMENT COVER SHEET

Document Name: **GOVERNMENT CORNER**

**BENTON COUNTY OF**

**THE PUBLIC**

Document Date: **12/17/2008**

This cover sheet is being attached to this document to provide room for recording information and is considered part of this document



# STATEMENT OF EVIDENCE

Northeast Corner of Section 13, T. 38, R. 28, Benton Co., MN.

Northwest Corner of Section 18, T. 38, R. 27, Mille Lacs Co., MN.

The line between Ranges 27 & 28, T. 38, was run by Dep. Surveyor Theo. Conkey in Oct. 1849. We were unable to find any remnants of his\* monument or access-ories for this corner.

\*Please see the Certificate Of Location for the NE corner of Section 1, T. 37, R. 28, Benton County; also being the NW corner of Sec. 6, T. 37, R. 27, Mille Lacs County; for a "discussion" regarding general conditions (including GLO resurveys and "Judicial Roads") affecting the locations of the corners along this County line.

In 1994 we were hired by Benton Co. to restore certain corners along their east Co. line. Old survey notes, subsequent to the GLO notes, from both counties are as follows (in chronological order):

Benton: Requested from the Co. Hwy. Dept.. None provided other than GLO notes.

Mille Lacs: In 1912 Deputy Co. Surveyor S.L. Kennedy resurveyed Sec. 8, T. 38, R. 27. The plat of said survey gives distances from the NW and SW corners of 8 west to proportional distance corners on a "theoretical" straight County line from found corners at the NW corner of Sec. 6 south to the W. 1/4 corner of Sec. 19. From the records at the Mille Lacs Co. Hwy. Dept., at a later date, a relationship between the said proportional distance corners and the corners of the "Judicial Road" were given. The "PD" position at the subject corner was "3.96' No. & 13.53' E. of Judicial Road corner". No other ties are given. (See the note above re. "conditions" along the County line)

A 1918 survey and plat of Sec. 6, T. 38, R. 27, by L.E. Garrison, Surveyor. The NW corner of Sec. 6 was common between this survey and that of Kennedy above. The other corners going south were not. See the Cert. Of Loc. for the NW of 7-38-27, Mille Lacs; NE of 12-38-28, Benton, for further details.

We are also aware of the following surveys by others with evidence pertaining to this corner: We are aware of no surveys other than that in 1994 Comstock & Davis, Inc., via their Little Falls office, was hired to provide Benton County geodetic coordinates on selected corners within the County. They did this with a combination of GPS and traditional methods.

In November 1995 we excavated a centered 10' by 10' by 4' deep hole, but found nothing other than an assortment of native field stone. The solitary white pine in the NW quad. would have been a logical BT, but there was no record thereof.

On 12/19/95 we set the corner at the "Judicial Road Corner" position per the relationship to SPM given above. On 1/26/96 we placed a railroad spike at this position and made new ties as shown on the front hereof. A County cast iron monument replacing the RR spike was set on 5/15/1996, down 0.5'.

MLCLS: /NW183827

BY *Alice C. Engelmeier* X  
DEPUTY

ALICE C. ENGELMEIER  
COUNTY RECORDER

OCT 3 8 52 AM '97

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

244637