

Certified, Filed and or Recorded on
Mar. 11, 2009 AT 10:20AM


Signed: Ju
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH EAST Corner of Section 15, Township 38, Range 28
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 12/09/08 found a 1/2" IRON PIPE CAP # 12236
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

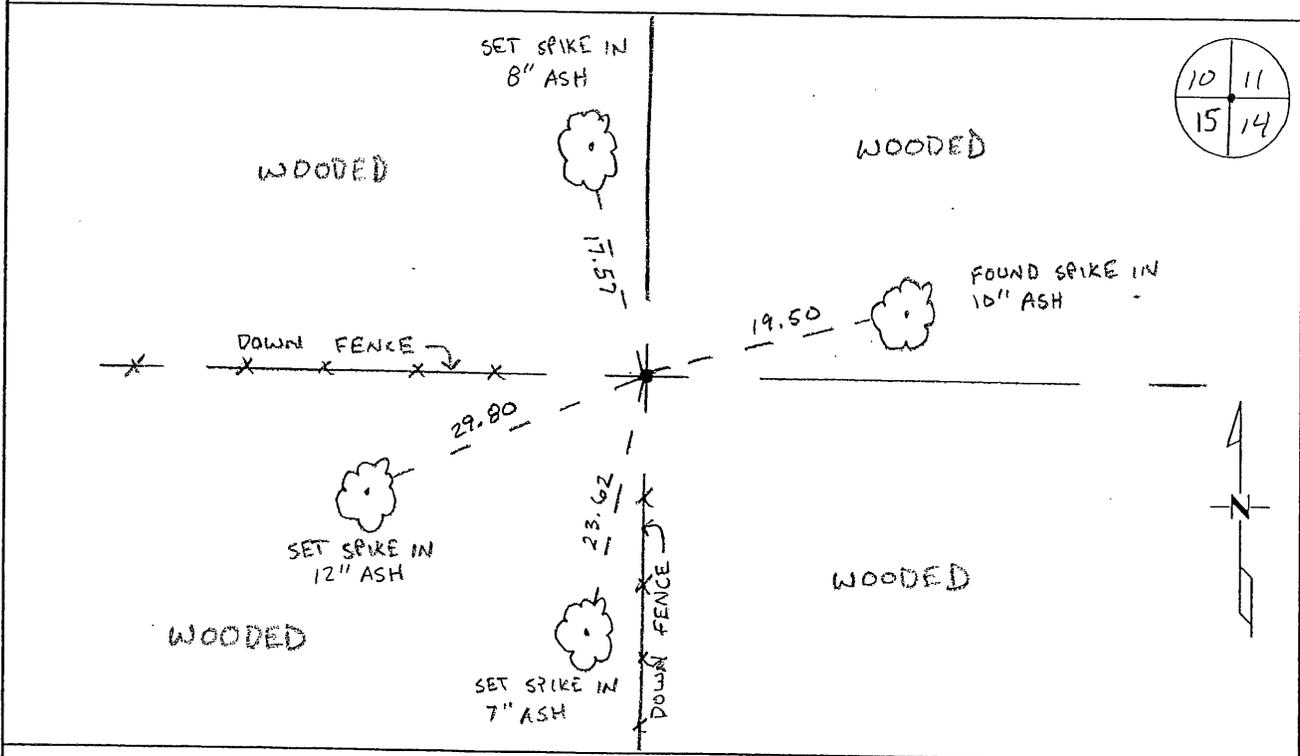

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 3/6/09

Statement of Evidence:

A152

Northeast Corner of Section 15, Township 38 North, Range 28 West, Granite Ledge Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|--------------|------------|----------|
| 26" Birch | N 41 E | 18 links |
| 20" Tamarack | S 49 1/2 E | 54 links |
- 1949 County Surveyor's Record Book 2, page 338, shows measurement of 5282.0 feet along the north line of Section 15. (Note: this could be from an earlier date.)
- 1983 David Regan, LS 12236, set a ½ " iron pipe on fence lines east and south. He filed a Certificate of Location (Doc. No. 167995). (Note: Certificate shows fence lines west and south).
- 2004 Found iron pipe with cap No. 12236 and obtained coordinates by GPS. Measured 5266.26 feet to the NW corner.
County Coordinates
NAD 83 (1996 Adjustment)
N- 185460.575
E- 526840.763
- 2008 Westwood Professional Services, Inc, found an iron pipe capped 12236 at the intersection of downed fence lines running west and south. Measured 5266.26 feet along the north line of Section 15 which short of GLO by 5.16 feet and short of 1949 record distance by 15.74 feet. Searched area for any evidence of original bearing trees and nothing was found. Fence lines appear to be very old and the only possible physical evidence found in the area. ½" iron pipe capped 12236 is accepted as marking the obliterated position for this corner. County coordinates obtained by GPS coincide with 2004 position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 15, Township 38, Range 28, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 3/29/83 placed a 1/2 inch iron pipe on fence lines east and south
DATE

SKETCH OF REFERENCE TIES

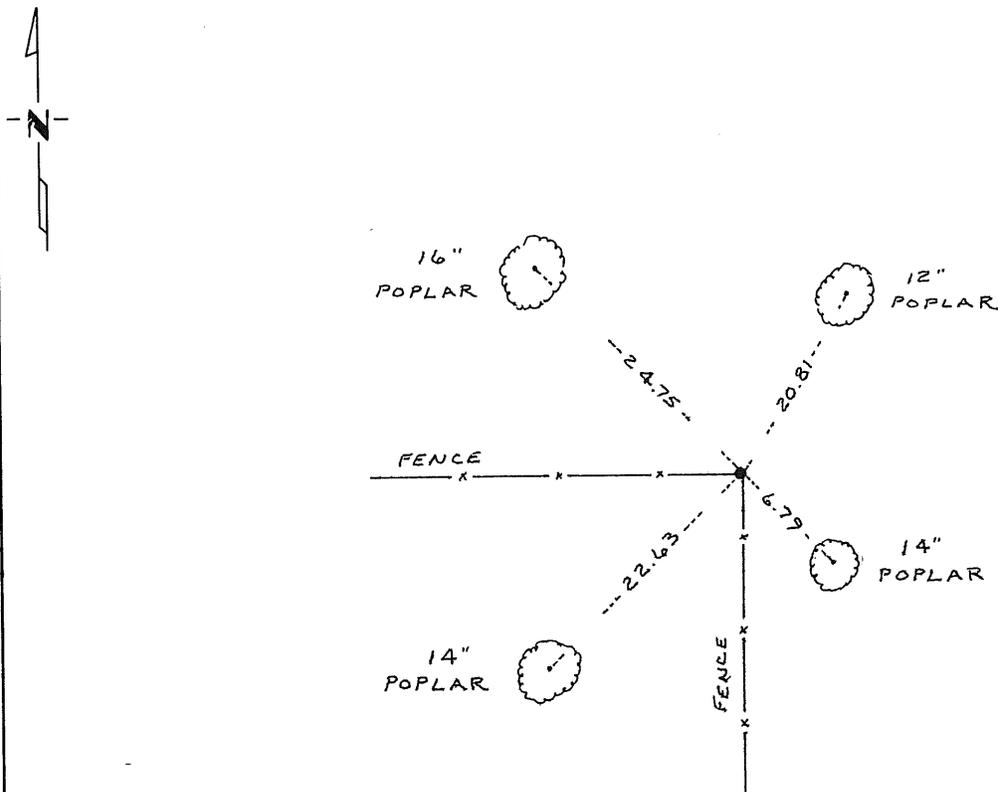

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Regan 1/3/84
SIGNATURE DATE

Registration No. 12236

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE ^{County Recorder} REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 4 P.M. on the 11th day of January A.D., 19 84

Register of Deeds F.A. Johnson

By _____, Deputy

DOCUMENT NO. 167995