

MARILYN J. NOVAK
COUNTY RECORDER
BY CK DEPUTY

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

293731


2002 DEC 31 P 3: 56

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 34, Township 38, Range 28
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

- On 10/17/2002 found a 12" X 12" X 24" pointed stone down
DATE 1.5 feet at the intersection.
- left monument as found lowered monument removed monument (explain)
- On 10/31/2002 placed a cast iron monument on top
DATE of the pointed stone

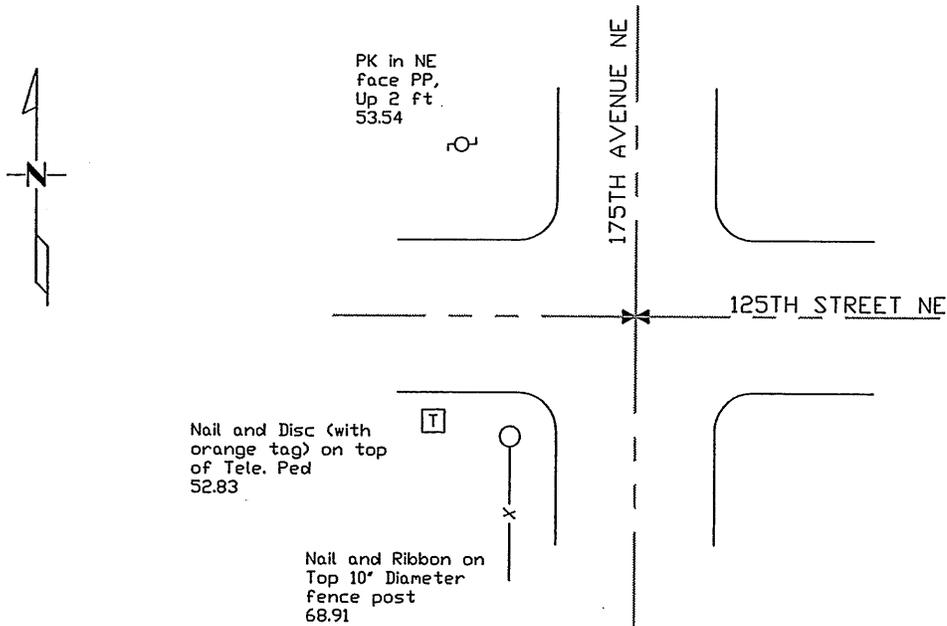

New tree and power pole ties are to the head of a nail with a brass disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Ray H. Stur Date 11/25/02 License No. 12684

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

A342

The Northeast Corner of Section 34, Township 38 North, Range 28 West, Granite Ledge Township, 4th Principal Meridian, Benton County, Minnesota.

In 1855, Oscar F. Davis set a wood post at this location and bearing trees were recorded.

10" Elm	N 81 E	32 links
20" B. Oak	N 30 W	55 links

The County Surveyors records in Book 2, page 376 notes a stone at the corner with no reference ties.

In May 1915, it was noted that J.P. Soderstrum set a stone at the corner and did show it on survey named No. 13 as shown in Book 2, page 362 in the County Surveyors Notes. He notes a distance of 40.60 chains to the N Cor Sec 34 (stone).

In 2001 Westwood Professional Services, Inc. established the corner at the intersection of the centerlines of 175th Avenue NE (running north and south) and 125th Street NE (running east and west). Set an iron monument capped #23002.

On October 17, 2002 Westwood Professional Services, Inc. dug with a backhoe at the centerline location, down 1.5 feet, found a 12"x12"x24" pointed stone.

On October 24, 2002 Westwood Professional Services, Inc. set a cast iron monument over the found stone and established reference ties.

Coordinates
NAD 83 (1996 Adjustment)
N-169614.358
E-562975.838