

Certified, Filed and or Recorded on
JAN. 25, 2011 AT 01:21PM


Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 1, Township 37 N, Range 30 W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 09/07/2010 found a CAST IRON MONUMENT DOWN 0.7' below GRAVEL SURFACE
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

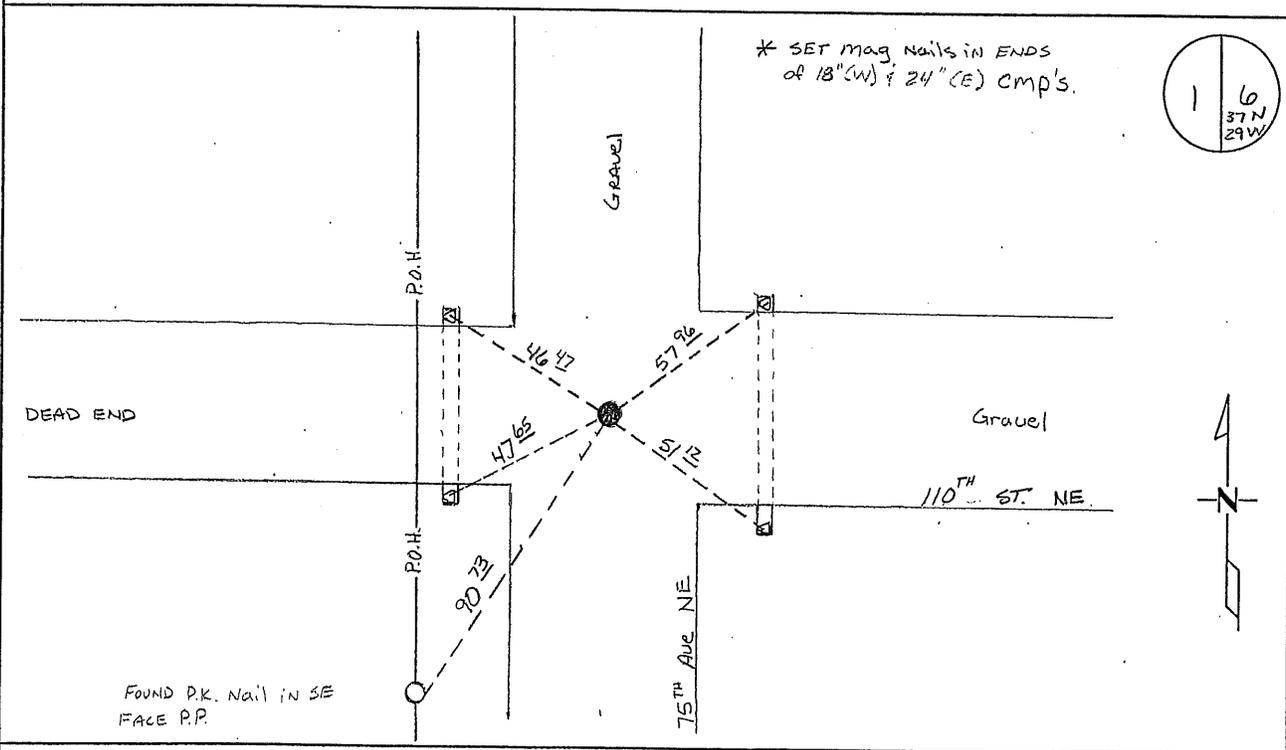

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 1/20/2011

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

G013

East Quarter Corner of Section 1, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

1849 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as:

4" Tamarack	N 78 W	14 links
8" Tamarack	S 81 E	12 links

Line trees were noted as a 8" W Oak, South, 21.62 chains and a 8" W Oak, North, 22.63 chains.

1991 William Lunser, LS 9394, set a cast iron monument at the centerline of roads north/south/east. He determined position to be an obliterated corner and comparing the lost position to occupation. He filed a Certificate of Location (Doc. #234186) and notes a distance of 2751.97 feet to the NE corner and a distance of 2716.40 feet to the SE corner.

2002 No resurvey information was found on this corner in the Benton County records.

2007 Westwood Professional Services Inc. found a cast iron monument at the centerline of roads north/south/east. The measured distances fit Mr. Lunser's well measuring 2751.75 to the NE corner and 2716.03 to the SE corner. The cast iron monument is accepted as the best available evidence of the corner position.

Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 161586.746
 E- 511003.934


2010 The Benton County Surveyor's Office found the cast iron monument, verified the 2007 coordinates and established reference ties as shown.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER corner of Section 1, Township 37, Range 30, 4th P.M.
Benton County, Minnesota.

On Mar 22, 1991, A cast iron monument (C.I.M.) was placed at this location.

SKETCH OF REFERENCE TIES

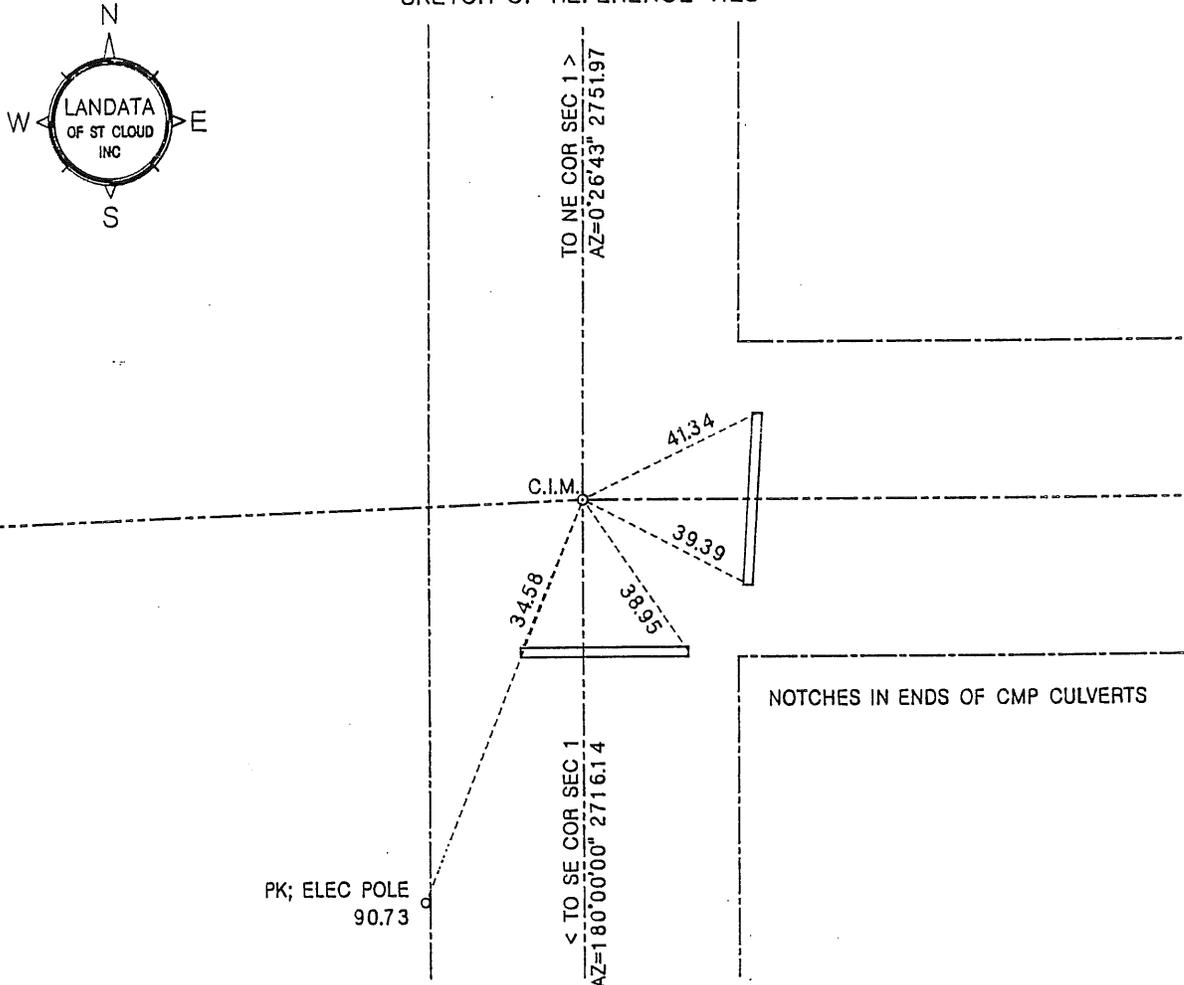

Statement of evidence relative to this corner location on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William F. Lunser 3/13/96
William F. Lunser, L.S. Date
Mn Reg No 9394

FB;1 31/54 DISC;1 4

OFFICE OF THE COUNTY RECORDER
Benton County, Minnesota

I hereby certify that this document was filed in this office at ____:____.M. on the ____ day of _____, 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

No records were found to indicate use or remonumentation of this corner after its original placement by the U.S. Government Survey (G.L.O.).

A search of the area revealed no monument in place.

Assuming this corner to be lost, a point was set proportionate to the G.L.O. distances to the north and south, which point falls 17 feet south of the intersection of the centerline of a north-south township road with the centerline of a township road to the east. The lost method was also used to determine a point for the sixteenth corner one quarter mile south which fell 8 feet south of a field line running west.

Since the field line falls very nearly midway between the southeast corner of Section 1 and the road intersection to the north, and finding distances to the north and south to be within tolerances of the G.L.O., I consider the corner obliterated by road construction, the centerlines of which serving as accessories to the G.L.O.'s position.


William F. Lunser, L.S.

2 3 4 1 8 6

DEPT. OF REVENUE
CLERK OF COURT
CERTIFIED TO BE FILED
AND/OR RECORDED ON

APR 10 2 36 PM '96

ALICE O. ENGELMEYER
COUNTY RECORDER

BY mm DEPUTY km