

Certified, Filed and or Recorded on  
Feb. 12, 2010 AT 12:59PM


Signed: M  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 9, Township 37, Range 30  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On June 2006 found a CIM with a large field stone under it.  
DATE
- left monument as found     lowered monument     removed monument (explain)
- On 11-30-06 placed an PK NAIL  
DATE

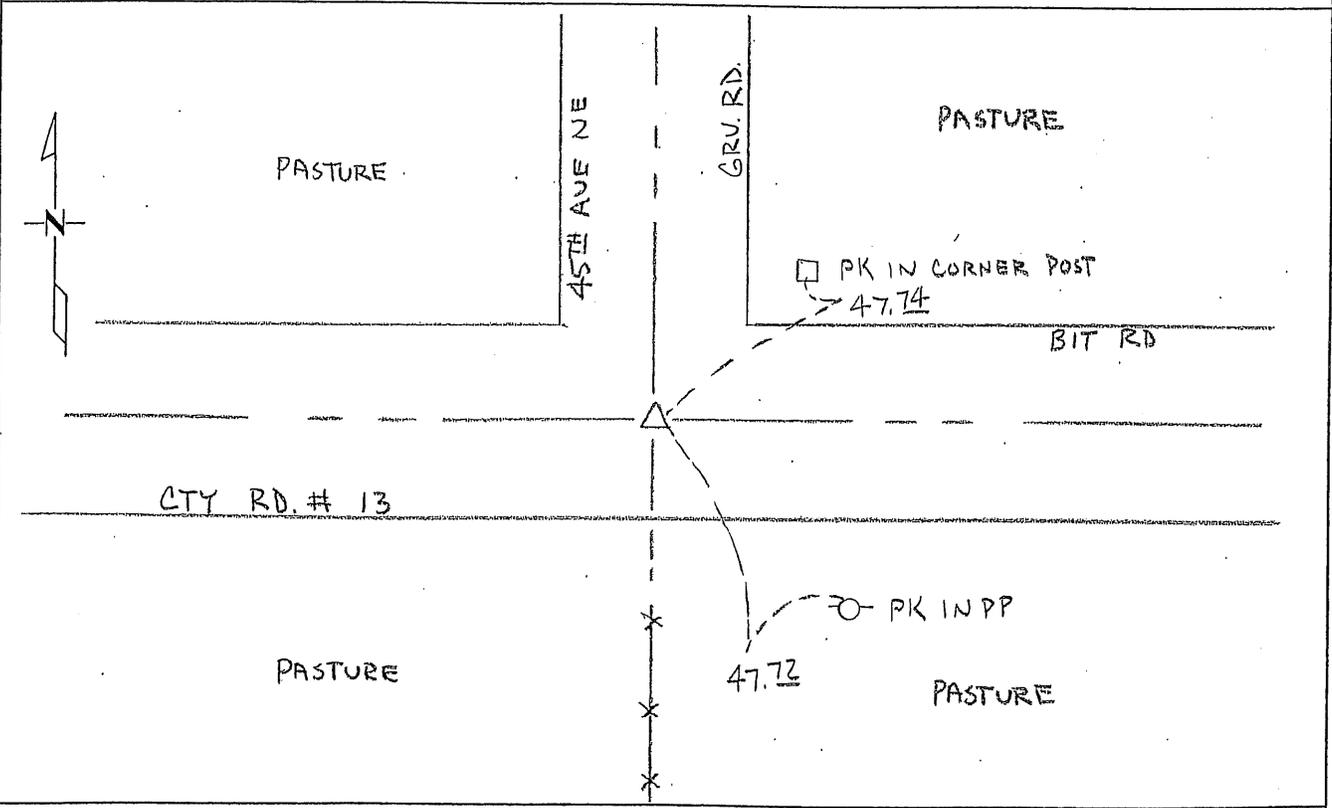

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature: Jerome C. Wittstock Date 2/12/2010 License No. 19552  
Title:  Land Surveyor     Professional Engineer     County Surveyor     County Engineer

Benton County Surveyor's Office  
 Jerome C. Wittstock, County Surveyor  
 Minnesota License No. 19552

**Statement of Evidence:****G093**

East Quarter Corner of Section 9, Township 37 North, Range 30 West, 4<sup>th</sup> Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

- 1852 Original US General Land Office surveyor, Edwin James, established corner marked by a wood post with bearing trees noted as.
- |             |         |           |
|-------------|---------|-----------|
| 8" Bur Oak  | N 1/2 E | 390 links |
| 24" Bur Oak | N 3/4 W | 485 links |
- 1892 County Road Book, page 71, shows road laid by out Felix Parrent on east-west 1/4 line.
- 1932 County Engineer's notebook No. 73 contains a road survey by H. G. Elletson for SAR No. 13. Corner is noted in east-west road with town road north and fence south. Corner is a large rock with hole. Ties:
- |            |    |       |
|------------|----|-------|
| T.P.       | NW | 30.5' |
| Cor. F. P. | NE | 32.4' |
- 1954 County Surveyor's Record Book 1, page 403, and Engineer's notebook No. 73 notes an iron set over a stone with a hole and the following reference ties
- |                    |    |       |
|--------------------|----|-------|
| PP                 | SE | 49.95 |
| 5 <sup>TH</sup> FP | S  | 65.4  |
- 2003 Survey by Sidney Williamson, LS 10918, shows CIM found at corner with a distance of 2665.21 feet to the NE corner of Section 9.
- 2006 Westwood Professional Services Inc. excavated a 10-foot x 12-foot x 4-foot deep hole with a Benton County backhoe. A large field stone with drill hole was found down 3 feet under the position of the CIM. A PK nail was set at the centerline of roads north/east/west and fence line south at the position of the found CIM and stone.

Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N- 156164.043  
 E-495101.757