

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 11, Township 37, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 8-11-92 found a P.K.
DATE

left monument as found, lowered monument, removed monument (explain)

On 8-11-92 placed a Cast Iron Monument (Flush)
DATE

SKETCH OF REFERENCE TIES

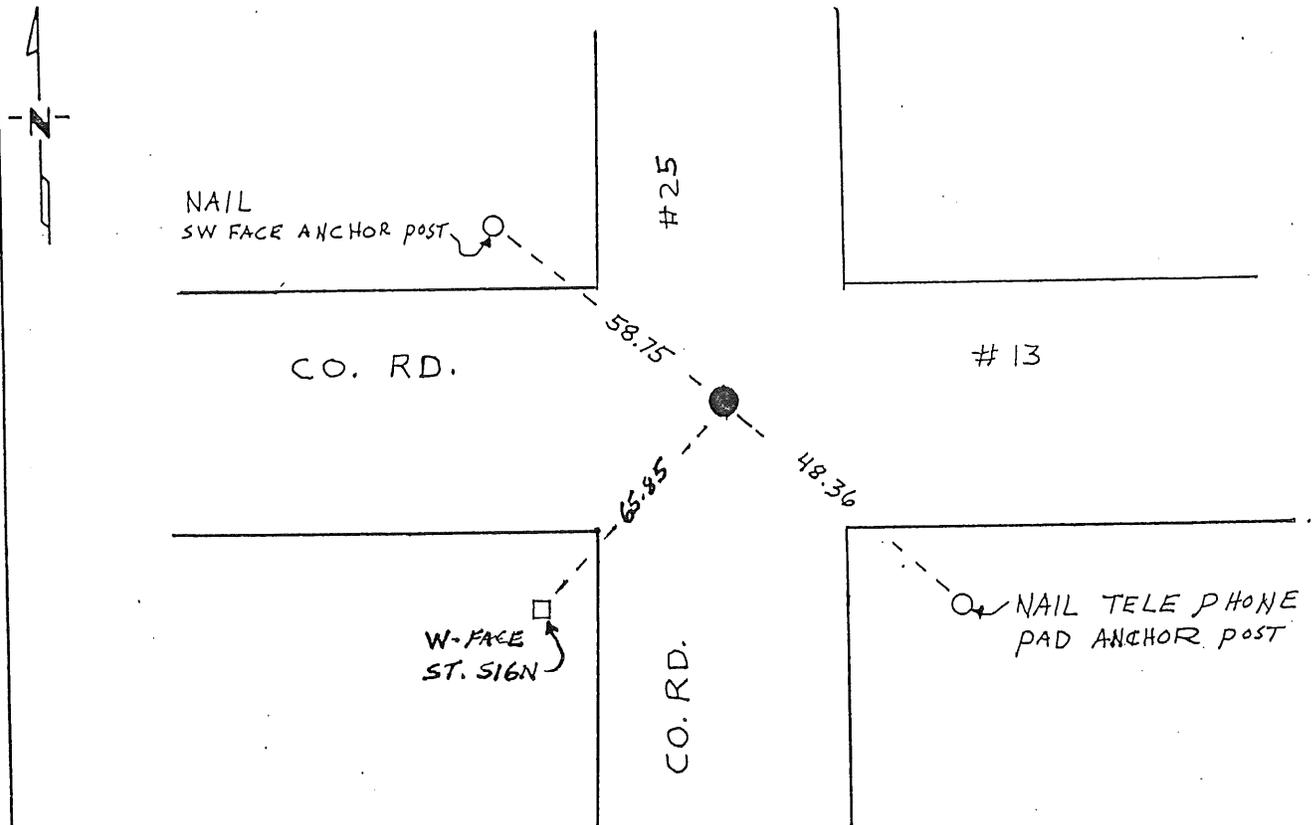

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 2-16-93
SIGNATURE DATE

Registration No. 10461

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

EAST QUARTER CORNER, SECTION 11, T 37N, R 30W, 4TH P.M.

1. During the G.L.O. survey of 1852, Mr. Edwin James Jr., a U.S. Deputy Surveyor, set a wood post to mark said corner.
2. Benton County's old surveyor's books provided no information to locate said corner.
3. On August 11, 1992, Paul E. Wellen & Associates searched for said corner at intersection of County Road #13 and County Road #25, we found a p.k. nail at center line-center line. We accepted center line-center line as evidence of said corner. On August 11, 1992, we set a Cast Iron Monument at center line-center line and established new reference ties as indicated.

216290

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JUL 14 1 23 PM '93

ALICE G. ERDELMAYER
COUNTY RECORDER

BY JW DEPUTY