

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 01:50PM


Signed: BW
MARILYN J NOVAK BJV
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 14, Township 37N, Range 30W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 11/13/08 found a CAST IRON MONUMENT DOWN 0.1'
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

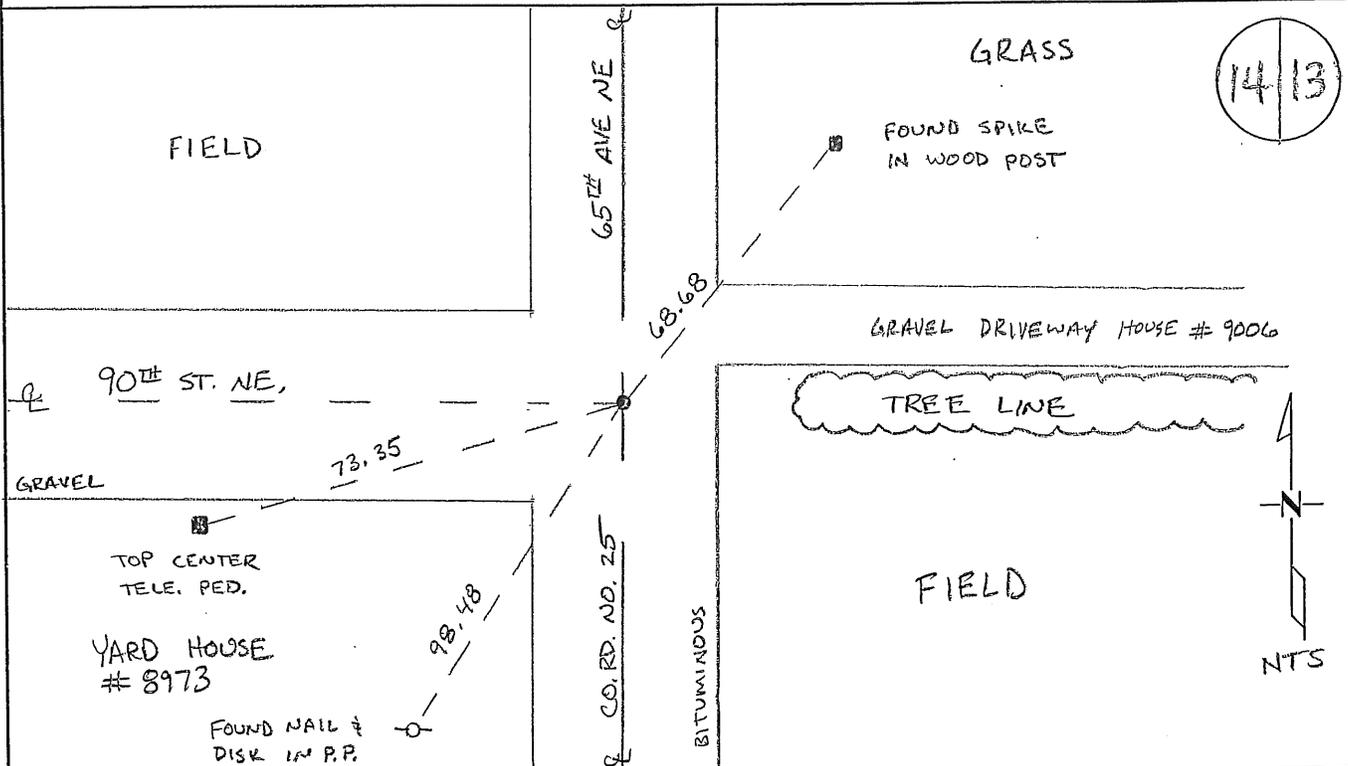

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature M. Henn
Deputy Benton County Surveyor
License No. 46170

Date: 12/12/08
PAGE 1 OF 3

Benton County Surveyor's Office
 Nancy H. Lewis, Deputy County Surveyor
 Minnesota License No. 46170
 Page 1 of 2

Statement of Evidence:**G143**

East Quarter Corner of Section 14, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

1852 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as:

14" R Elm	N 73 E	16 links
16" W Birch	S 89 1/2 W	44 links

1890 County Road Book, page 32, contains Surveyor's Report by Felix Parrent stating road laid out on section line. Gives distance of 80.04 chains for the east line of Section 14.

1941 County Engineer's Notebook No. 150 contains a road survey for CAR 25 running south to north on section line. Corner is shown marked by a hub set in center of road with fence lines east and west. Ties:

FP	W	26.5'
FP	SW	54.9'

Stationing gives distances of 2660.6 feet to the SE corner and 2700.5 feet to the NE corner with a delta angle of 0-42' left.

1944 County Engineer's Notebook No. 164 contains a road survey for CAR 25 running south to north on section line. Corner is shown marked by a hub set in center of road with town road west and fence line east. Ties:

Twin 10" Ash	SE	96.1'
8" W. Oak	SE	85.6'

Stationing gives distances of 2661.9 feet to the SE corner and 2701.7 feet to the NE corner with a delta angle of 0-32' left.

1969 County Engineer's Notebook No. 288 contains a road survey for CSAH No. 25 running south to north on section line. Corner is shown marked by a spike set in center of road with town road west and fence east. Ties:

Steel Post	SW	41.4
Mail Box Post	NW	47.6
FP	SE	31.8

Stationing gives distances of 2663.4 feet to the SE corner and 2704.4 feet to the NE corner with a delta angle of 0-33' left.

Notation in 1975 shows placed iron with ties as below.

1975 County Surveyor's Record Book 1, page 413, notes a hub with the following reference ties:

Tele. Ped	SW	73.95
PP	SW	97.2

1981 Paul Wellen, LS 10461, set a RR spike for corner and measured 2704.61 feet to the NE corner.

Benton County Surveyor's Office
Nancy H. Lewis, Deputy County Surveyor
Minnesota License No. 46170
Page 2 of 2

2008 Westwood Professional Services found a cast iron monument that measured 2704.72 feet to the NE corner.

Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N- 150759.236
E- 505583.594

2008 The County Surveyor's Office searched and found a cast iron monument at the intersection of a north-south bituminous road (County Road No. 25) and a west gravel road (90th Street N.E.). The position gives distances to the NE Cor. and SE Cor. of 2704.74 feet and 2662.94 feet and a delta angle of 0-31'17" left, which agrees with the County Engineer's 1941 measurements to same of 2700.5 feet, 2660.6 feet and a delta angle of 0-42' left. The Surveyor accepts the cast iron monument position and ties were updated. Coordinates to same agree with those obtained by Westwood Professional Services in 2008 above.