

Certified, Filed and or Recorded on  
Mar. 30, 2010 AT 11:45AM


Signed: BW  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 15, Township 37N, Range 30W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 11/04/08 found a CAST IRON MONUMENT DOWN 0.8'
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

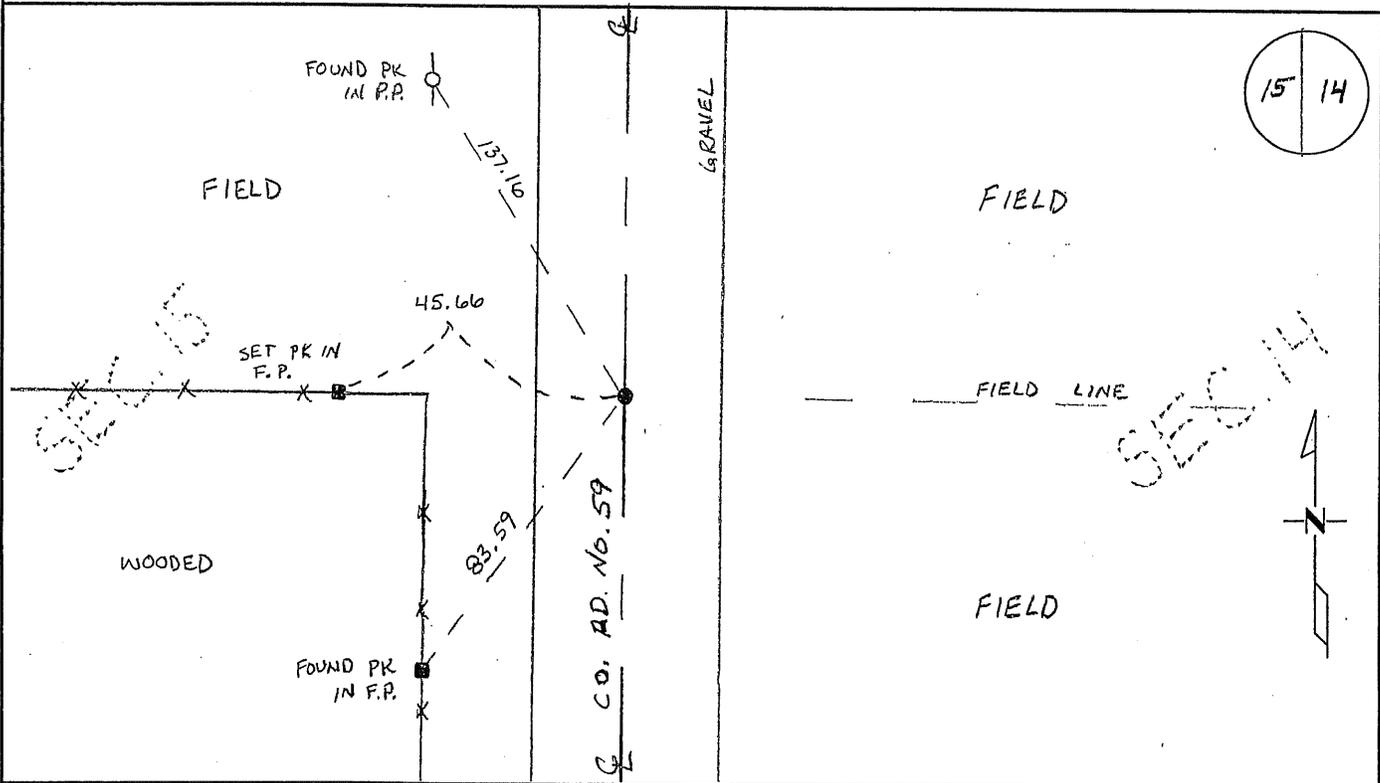

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock  
Benton County Surveyor  
License No. 19552

Date: 30 March 2010

Benton County Surveyor's Office  
 Jerome C. Wittstock, County Surveyor  
 Minnesota License No. 19552

**Statement of Evidence:**

G153

East Quarter Corner of Section 15, Township 37 North, Range 30 West, 4<sup>th</sup> Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

1852 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as:

8" Ash	N 59 W	12 links
30" Bur Oak	S 14 E	21 links

1938 County Engineer's Notebook No. 122 contains a road survey for CAR 24 running north to south. Notes show corner marked by a spike set in road with fence west. Ties:

10" Elm	SW	42.9'
14" Elm	W	47.5'

Stationing gives distances of 2689.4 feet to the NE corner and 2713.7 feet to the SE corner.

1992 Paul Wellen, LS 10461, set a cast iron monument at the intersection of the centerline of County Road 59 (running north and south) and a fence line (west) and a field line (east). He filed a Certificate of Location (#216297).

2008 Westwood Professional Services found a cast iron monument at the intersection of the centerline of County Road 59 (running north and south) and a fence line (west) and a field line (east).

Coordinates Obtained by GPS NAD 83 (1996 Adjustment)

N- 150844.612

E- 500300.556

2008 The County Surveyor's Office found a cast iron monument at the intersection of the centerline of County Road 59 (running north and south) and a fence line (west) and a field line (east). Stationing gives distances of 2687.77 ft. to the NE corner and 2714.38 ft. to the SE corner which agree reasonably well with the County Engineer's 1938 distances. The Surveyor was able to locate two of Wellen's 1992 ties to the P.P. to the NW and the F.P. to the SW, however the F.P. to the W. was destroyed. The Surveyor accepts the cast iron monument and set ties to same.

Coordinates Obtained by GPS

NAD 83 (1996 Adjustment)

N- 150844.715

E- 500300.600

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 15, Township 37, Range 30, 4<sup>TH</sup> P.M.

STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 8-18-92 placed a CAST IRON MONUMENT  
DATE

## SKETCH OF REFERENCE TIES

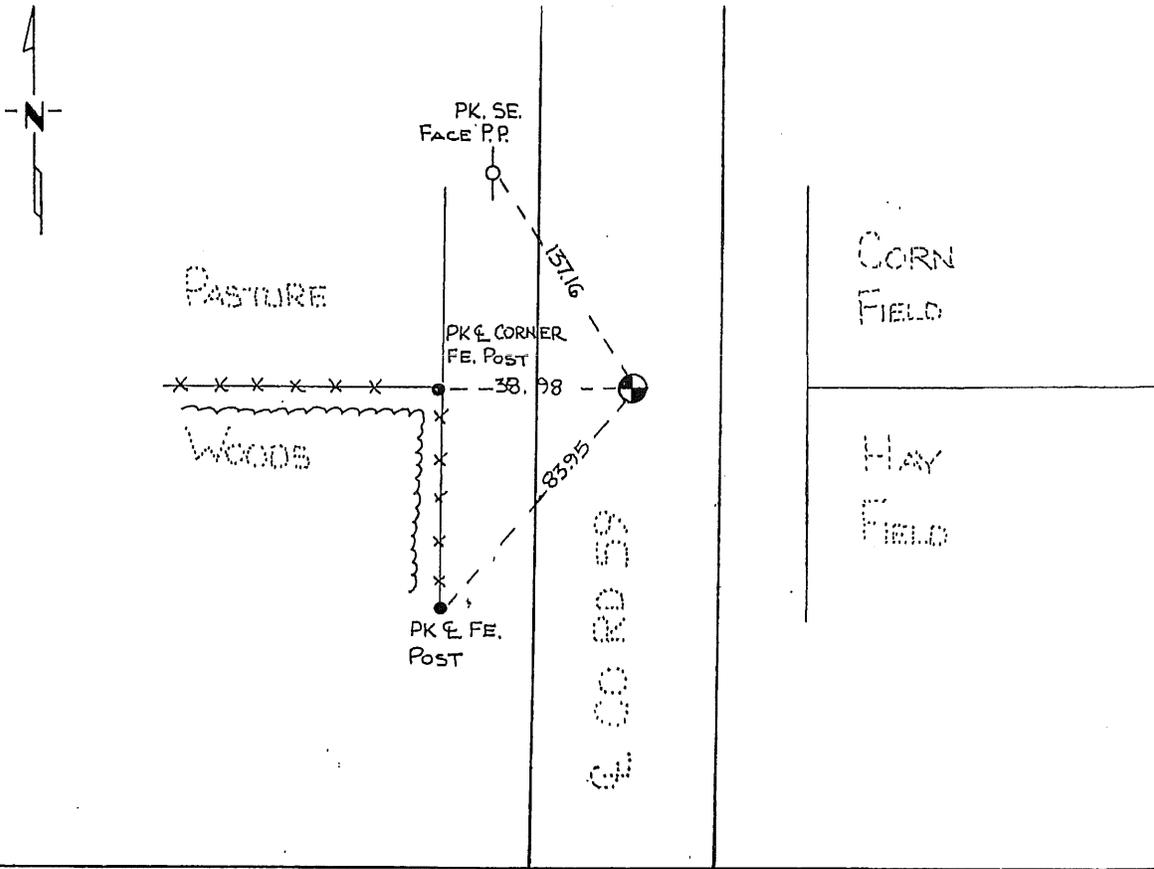

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*[Signature]* \_\_\_\_\_ 2-16-93  
SIGNATURE DATE

- Registration No. 10461
- Land Surveyor,  Professional Engineer
  - County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_  
By \_\_\_\_\_, Deputy  
DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

EAST QUARTER CORNER, SECTION 15, T 37N, R 30W, 4TH P.M.

1. During the G.L.O. survey of 1852, Mr. Edwin James Jr., a U. S. Deputy Surveyor, set a wood post to mark said corner.
2. Benton County's old surveyor's books provided no information to locate said corner.
3. On August 18, 1992, Paul E. Wellen & Associates searched for said corner at intersection of fence line running West and Field Division running East. We accepted this location of evidence of said corner. On August 18, 1992, we set a Cast Iron Monument at center line of County Road #59 and East-West fence line. Also established new reference ties as indicated.

216297

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JUL 14 1 23 PM '93

ALICE G. FISCHMEYER  
COUNTY CLERK

BY JW DEPUTY