

Certified, Filed and or Recorded on
Mar. 16, 2010 AT 12:37PM


Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 19, Township 37, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found lowered monument removed monument (explain)
- On 11-30-06 placed an "T" FENCE POST
DATE

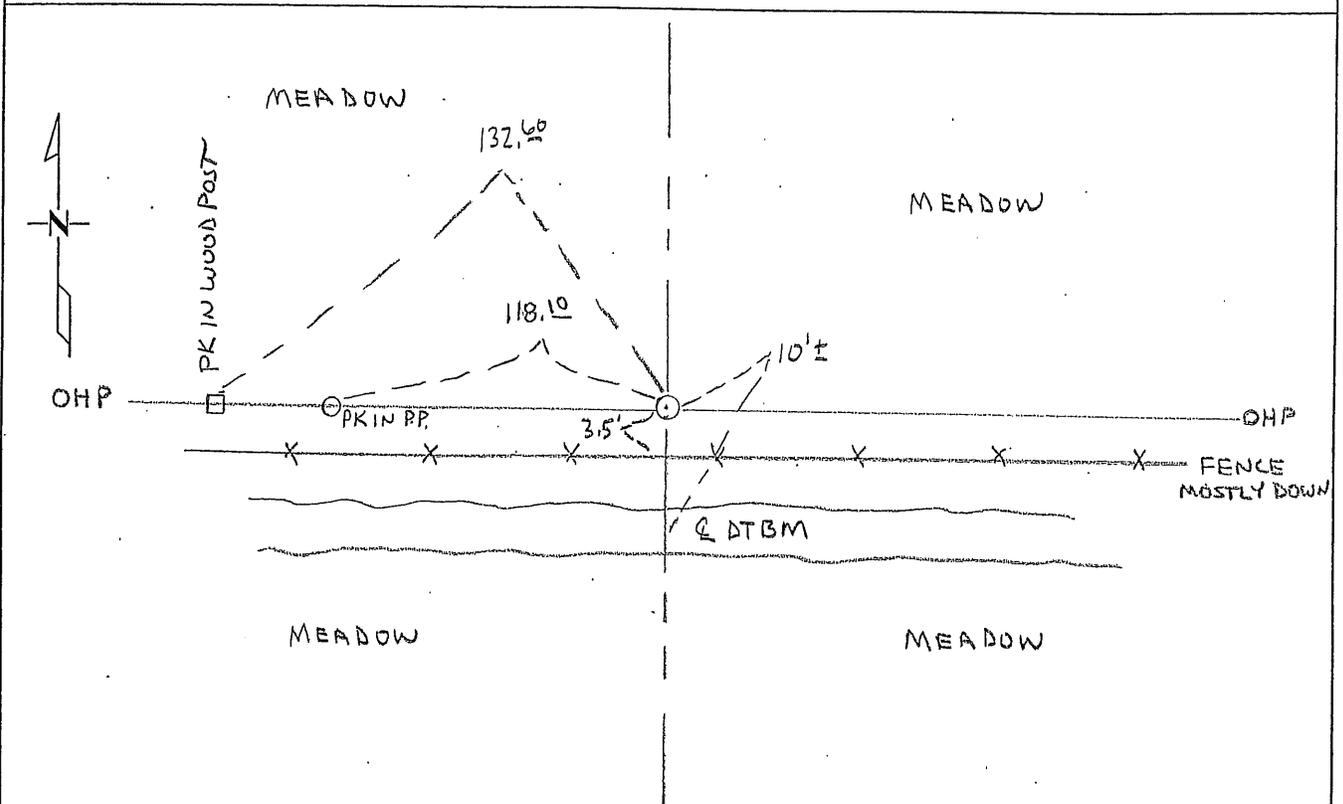

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature: Jerome C. Willatosh Date: 3/16/2010 License No. 19552
Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

G193

East Quarter Corner of Section 19, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

1852 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as.

6" Tamarack	S 69 W	89 links
10" Tamarack	N 6 E	153 links

2002 No resurvey information was found on this corner in the Benton County records.

2006 The Benton County Surveyor's Office found a crooked east-west fence, but no evidence of the corner monument. The distance south is 3 feet long of the GLO distance and the distance north is 81 feet long of GLO distance. No evidence was found for establishing the east-west position of the corner so the corner is set on line between the northeast and southeast corners of Section 19. A "T" post was set at the average of the east-west fence line on line between section corners to mark the corner position.

Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-145451.981
E-484210.843