

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter _____ Corner of Section 21, Township 37, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9-2-92 placed a cast iron monument.
DATE

SKETCH OF REFERENCE TIES

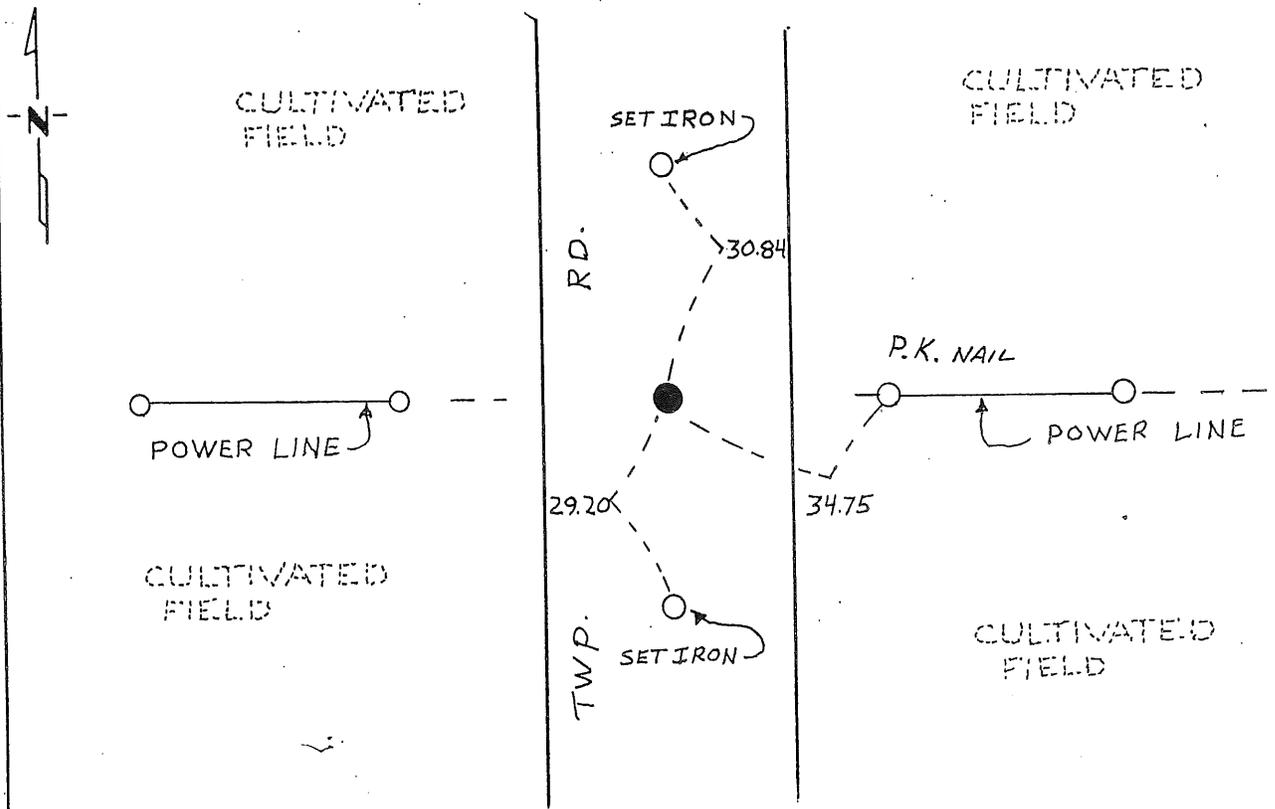

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Miller 2-16-93
SIGNATURE DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

EAST QUARTER CORNER, SECTION 21, T 37, R 30W, 4TH P.M.

1. During the G.L.O. survey of 1855, Mr. Oscar F. Davis, a U.S. Deputy Surveyor, set a wood post to mark said corner.
2. Benton County's old surveyor's books provided that in 1957 large rock present.
3. On September 2, 1992, Paul E. Wellen & Associates searched for said corner at center line Township Road power line running East-West. We accepted the power line center line road intersection as evidence of said corner location. On September 2, 1992, we set a Cast Iron Monument at center line of road and intersection of power line. Also, we established new reference ties as indicated.

216306

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JUL 14 1 24 PM '93

ALICE G. ENCKMEYER
COUNTY RECORDER

BY *js* DEPUTY