

Certified, Filed and or Recorded on
Mar. 23, 2010 AT 11:51AM


Signed: M
MARILYN J NOVAK. G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 31, Township 37, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 1-25-07 found a CAST IRON MON.
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____
DATE

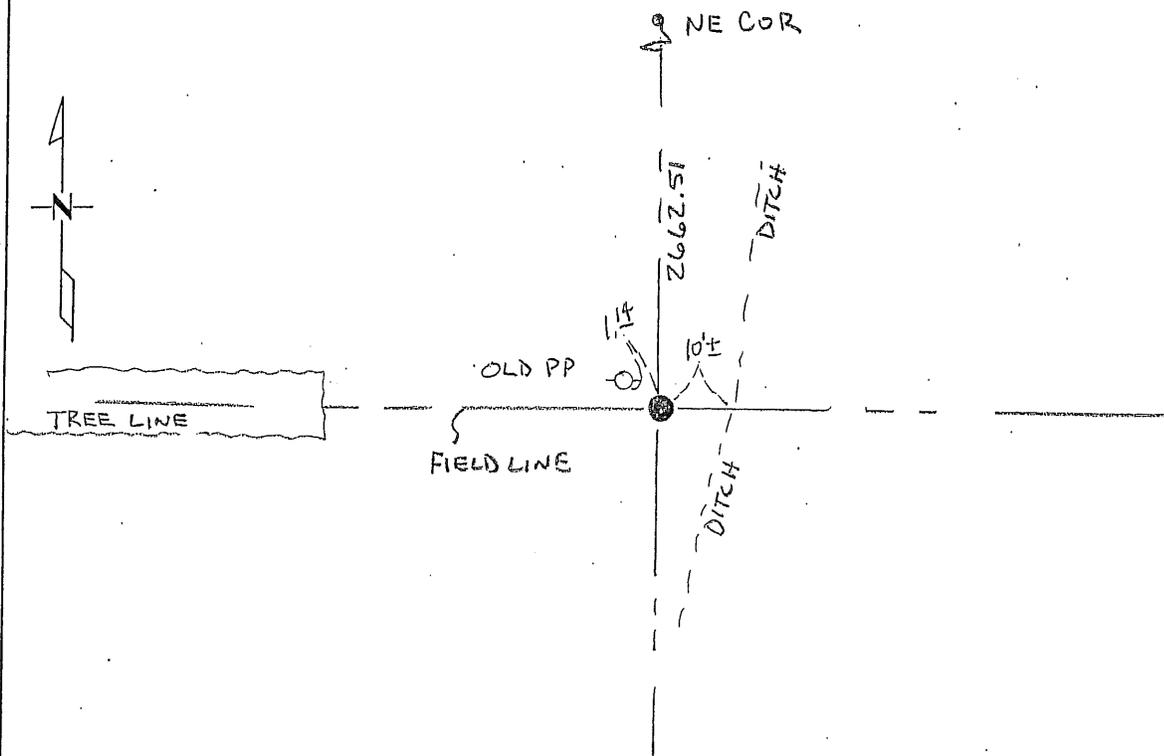

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 3-22-2010 License No. 19552
 Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

G313

East Quarter Corner of Section 31, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.


- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
 10" Aspen N 9 1/2 E 428 links
- 1980 Paul Wellen, LS 10461, set a cast iron monument at a tree line west and occupation north. He filed a Certificate of Location (#160203). Certificate shows distances of 2662.51 feet to the NE corner and 2664.24 feet to the SE corner of Section 31.
- 2002 No record evidence of this corner has been found in the Benton County records.
- 2007 Westwood Professional Services, Inc. found a cast iron monument on a tree/field line west, 10 feet west of a ditch and on the southeast side of an old power pole. Distance to the northeast corner measures 2662.50 feet and to the southeast corner measures 2673.60 feet. The CIM is accepted as marking the obliterated position, GPS coordinates were obtained and reference ties established.

Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-134839.649
 E-483907.660

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 2 day of January, 1980
I did set the East Quarter corner of Section 31,
Twp. 37, Rg. 30, Benton County, Minnesota, which
was evidenced by a tree line to the west and occupation to the north

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of Benton County Cast Iron Monument and that
I did establish witness or reference monuments as shown below:

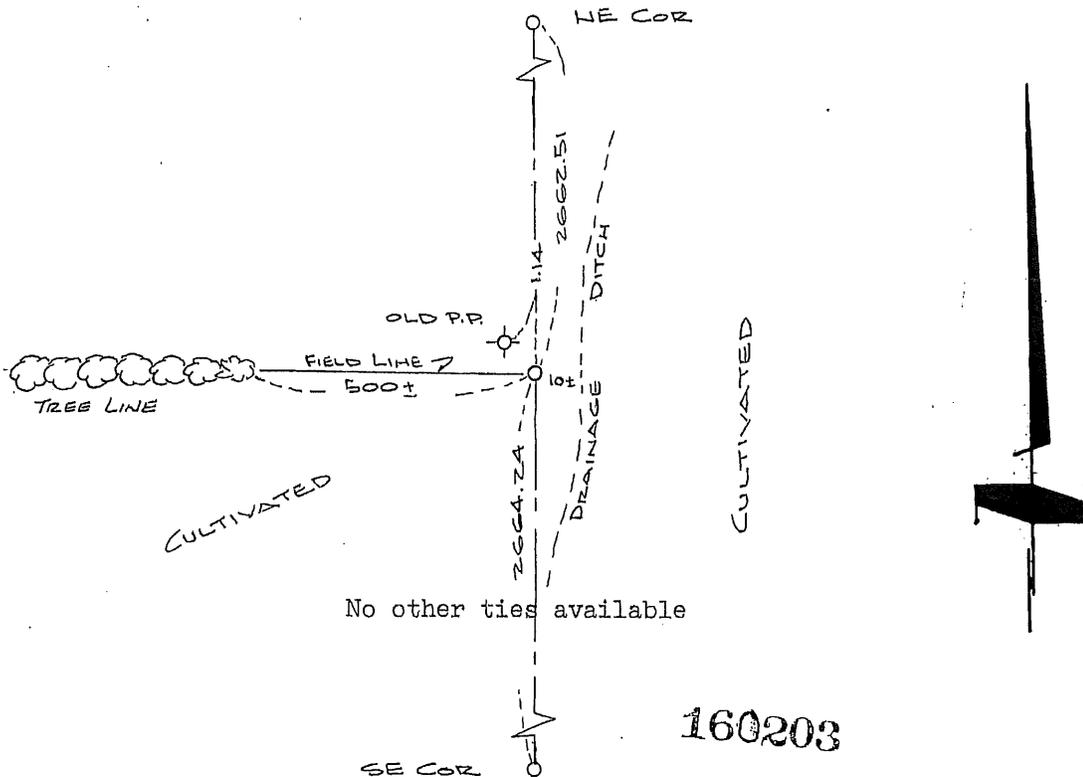

I hereby certify that the above
is true and correct and that I am
a registered Land Surveyor under
the laws of the State of Minnesota.

Paul J. Miller
Minn. Registration No. 10461

160203
79-175-B-14 P-132
Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
was filed for record in this office on the
10th day of September, 1981 at 2 P.M.

J.A. Johnson
County Recorder

By _____ Deputy.