

Certified, Filed and or Recorded on
Aug. 24, 2009 AT 08:10AM


Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 7, Township 37, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
- left monument as found lowered monument removed monument (explain)
- On 07/06/09 placed an 1/2" I.P. RLS #19552

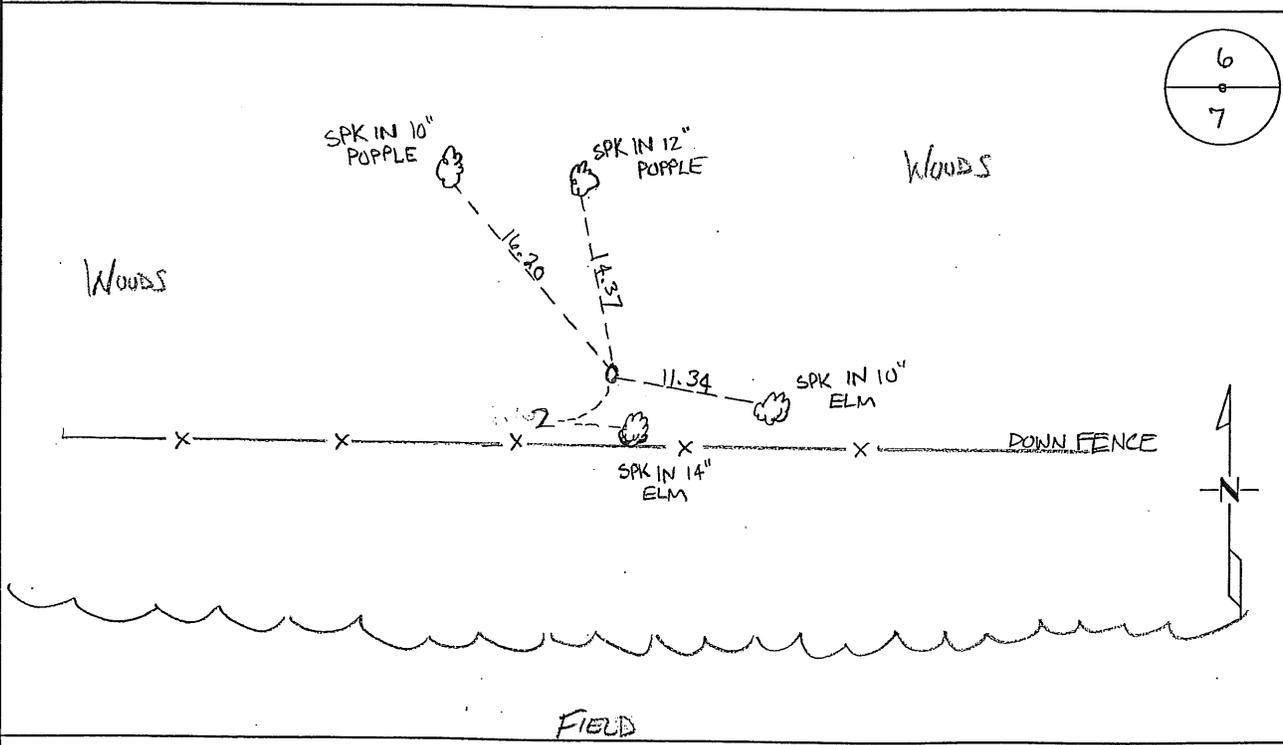

6
7

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 21 August 2009

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

G071

North Quarter Corner of Section 7, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

- 1852 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as.
- | | | |
|-------------|--------|-----------|
| 18" Bur Oak | N 23 E | 605 links |
| 4" Bur Oak | S 28 E | 268 links |
- 2002 No resurvey information was found on this corner in the Benton County records.
- 2009 Westwood Professional Services, Inc. searched for corner evidence and found none. An east-west down fence was found and a north-south fence line and tree line to the south was located. The distance east compares well with the GLO distance with an extra tally. Many distances in Benton County contain extra tallies. The closing distance to the west measures 19 feet longer than the GLO distance. Believing the down fences to be the best available evidence, a 1/2-inch by 15-inch iron pipe capped 19552 was set on the north side of the down east-west fence (on line between section corners) on the projection of fence to the south.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-158888.222
 E-481767.784