

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 01:58PM

Signed: BW
MARILYN J NOVAK G. V.
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 8, Township 37N, Range 30W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 11/11/08 found a 1/2" IRON PIPE WITH CAP # 12236 0.5' UP

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

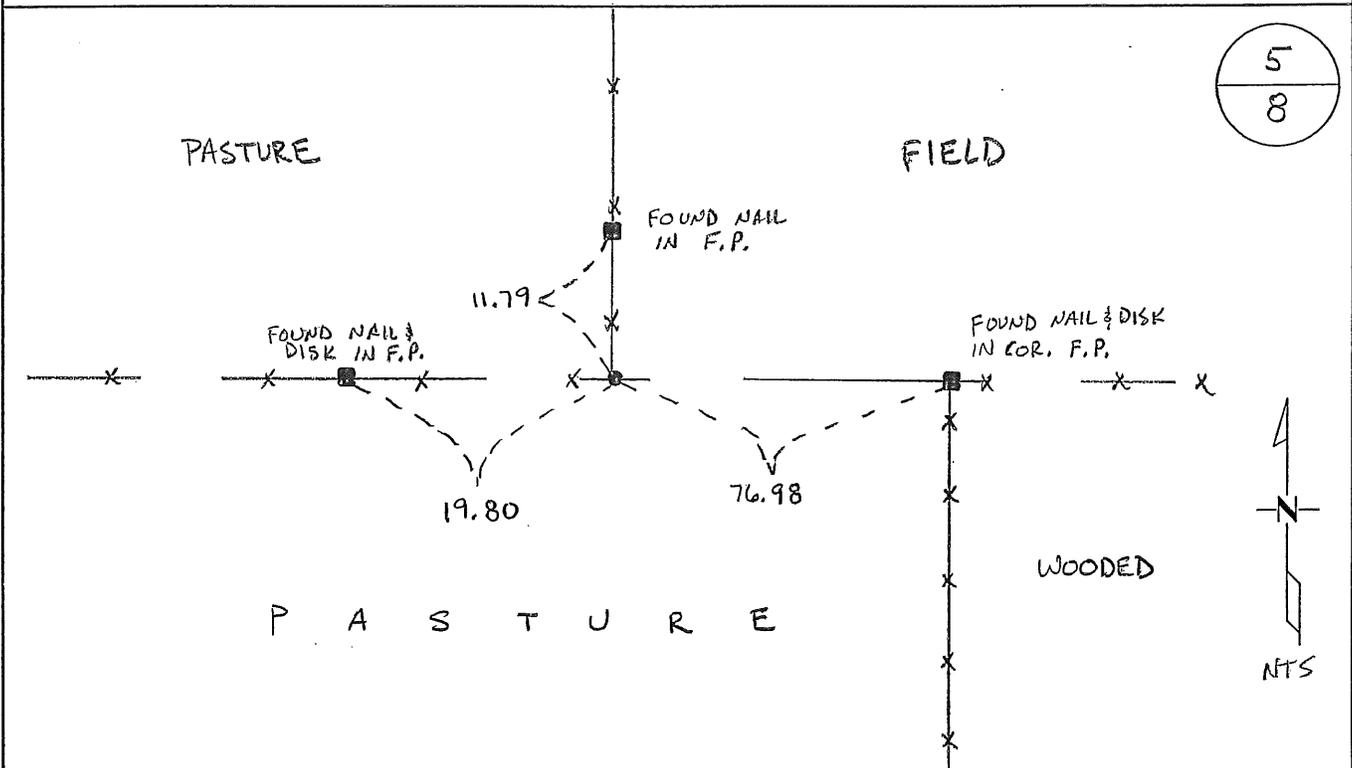

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature M. Lewis
Deputy Benton County Surveyor
License No. 46170

Date: 12/12/08

Benton County Surveyor's Office
Nancy H. Lewis, Deputy County Surveyor
Minnesota License No. 46170

Statement of Evidence:

G081

North Quarter Corner of Section 8, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

- 1852 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as.
6" Aspen N 89 E 500 links
- 1991 David Regan, LS 12236, set a 1/2" I. Pipe at a fence corner of fence lines north/west, which also fits a fence line east. He filed a Certificate of Location (#223481).
- 2002 No resurvey information was found on this corner in the Benton County records.
- 2007 Westwood Professional Services found a 1/2" I. Pipe David Regan, LS 12236, at a fence corner of fence lines north/west, which also fits a fence line east.

Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N- 158799.304
E- 487104.234

- 2008 The County Surveyor's Office searched and found Regan's 1/2" iron pipe at the intersection of a west fence line and a north fence line and on line with an east fence line. The position gives distances to the NW Cor. and NE Cor. of 2666.50 feet and 2679.65 feet respectively and is 3.95 feet south of a straight line. Surveyor accepts the position as best evidence and updated ties. Coordinates obtained by GPS agree with those reported by Westwood above.


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter _____ Corner of Section 8, Township 37, Range 30, 4th P.M.
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4/5/91 placed a 1/2" Iron Pipe at fence corner on fence line North
DATE
and West, also on fence line East

SKETCH OF REFERENCE TIES

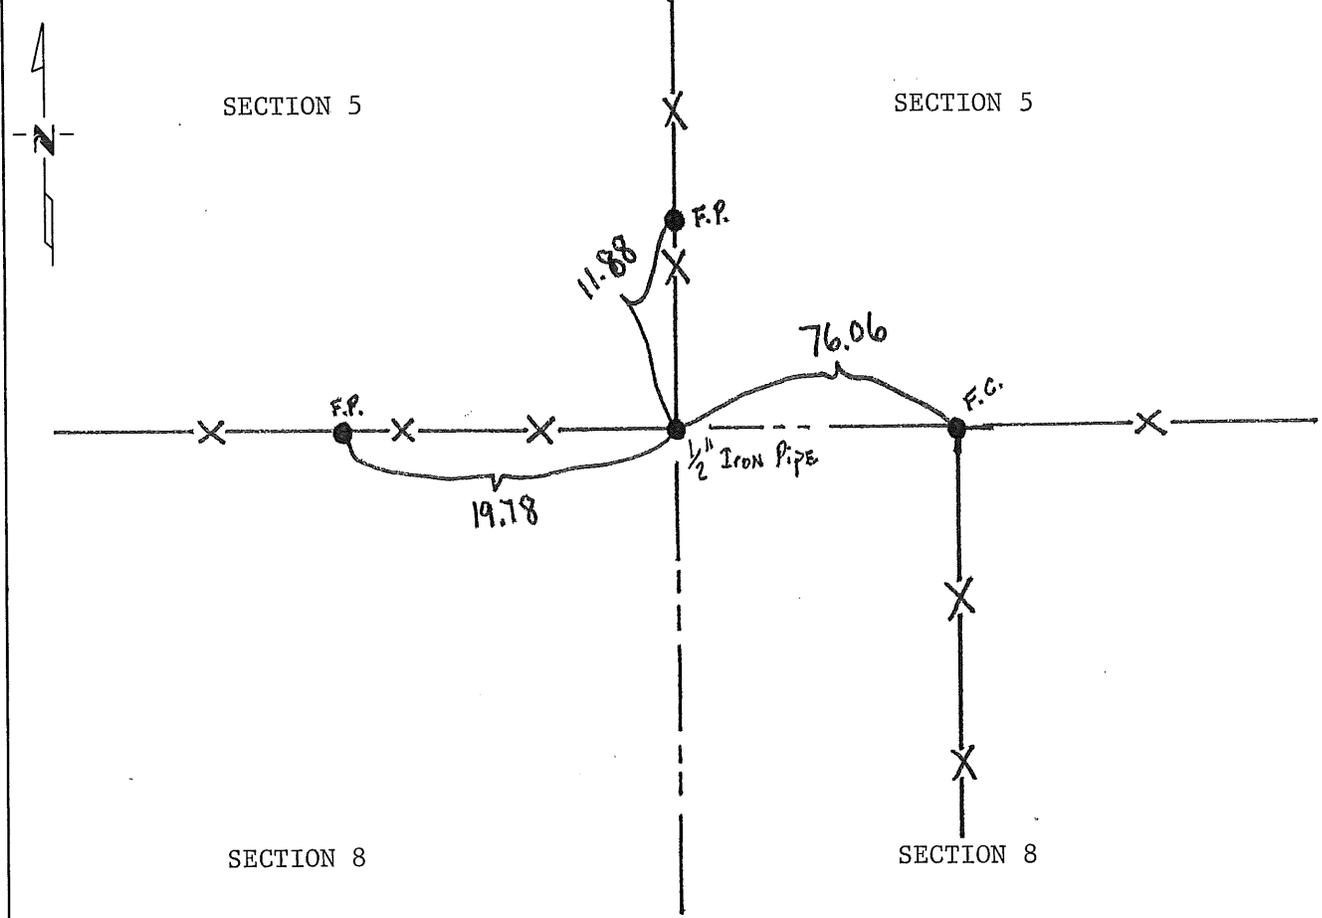

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David J. Regan 5/12/94
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The G.L.O. survey was done in 1852 by Edwin James.

The County Surveyors records were searched with no reference to this corner.

On 4/91, Regan Land Surveyors, Inc. searched the area, then set a ½ inch iron pipe at fence corner on fence North and West, and fence line to East.

223481

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JUN 17 1 02 PM '94

ALICE C. FRIEDMEYER
COUNTY RECORDER

BY *Jed* DEPUTY