

381794

Certified, Filed and or Recorded on
May 24, 2011 1:26 PM

BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

By: BW


6--V--I

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 16, Township 37 North, Range 30 West, Fourth Principal Meridian, Benton County, Minnesota.

At this corner location shown on the sketch:

- On 30 Nov. 2006 found a stone down 1.0 feet below road surface in east-west center-
of County State Aid Highway No. 6
- left monument as found lowered monument removed monument (explain)
- On 02 Mar. 2011 placed an 1/2" x 14" iron pipe capped "RLS 19552" drilled partially into
found stone

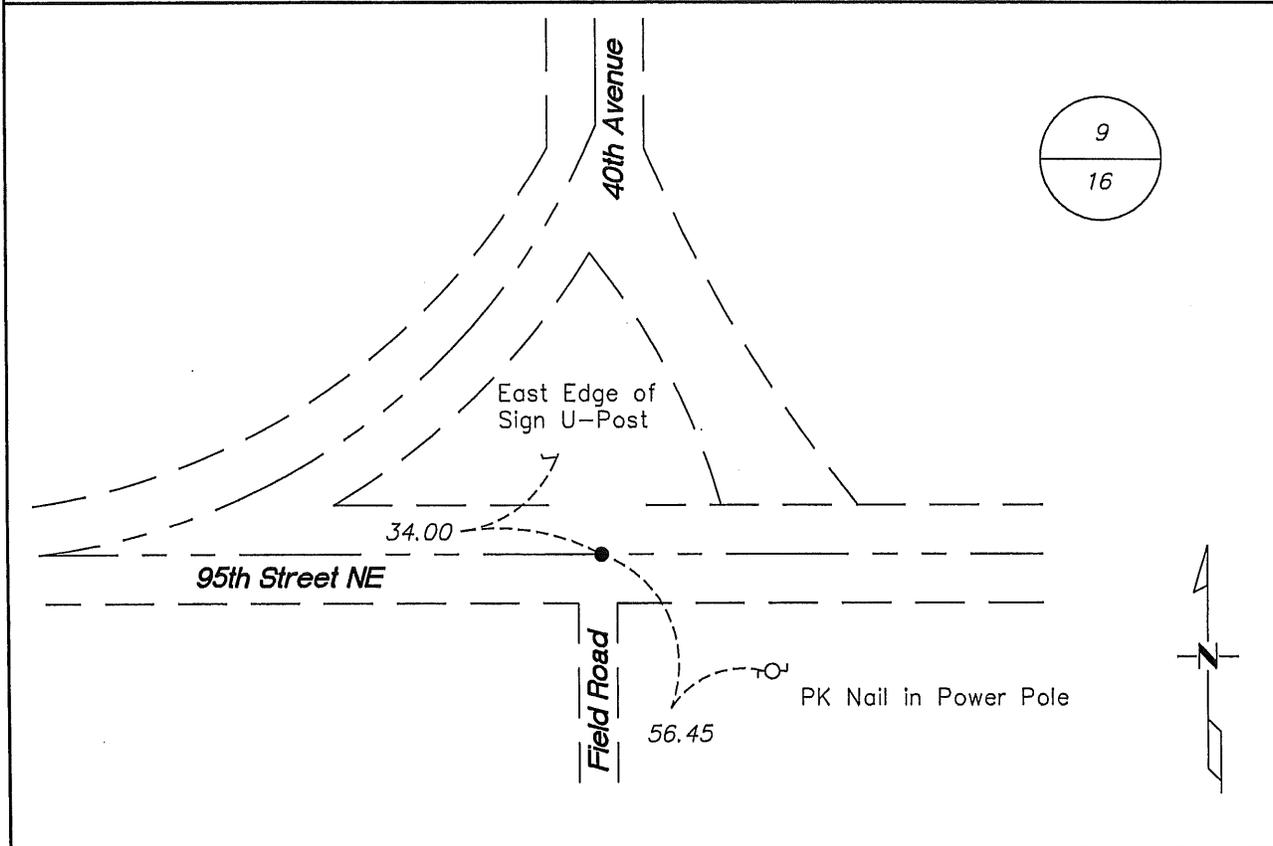

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a Licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittetoch
Benton County Surveyor
License No. 19552

Date: 24 May 2011

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:**G161**

North Quarter Corner of Section 16, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

1852 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as:

6" Blk Oak	S 63 W	111 links
5" Aspen	N 36 E	330 links

1899 Road Survey Report by John E. Whilt, County Surveyor, shows survey starting at this corner post and running east on section line with a distance of 40.61 chains to the NE corner.

Undated County Surveyor's Record Book 1, page 417, notes the following reference ties:

FP	E	33.4
FP	SE	42.6

1935 County Engineer's Notebook No. 94 contains survey by H. G. Elletson for SAR No. 2 running west to north. Notes corner as a spike with ties:

S end culvert	SW	17.1
S end culvert	NW	32.1

1977 William Lunser, LS 9394, set a RR spike at the centerline of roads north/east/west. He filed a Certificate of Location (#147066) and notes a distance of 2678.11 feet to the NW corner Sec 16.

2006 The Benton County Surveyor's Office excavated 6-foot by 6-foot by 2-foot deep hole. The railroad spike set in 1977 was found laying flat at the surface of the gravel road. A fieldstone was found down 1 foot below the gravel surface. The stone measures flat compared to the 1899 distance to the east and measures 5 feet short of the 1977 distance west. I believe the stone was placed during either the 1899 or 1935 surveys. Since the found stone fits the 1899 distance east and falls at the intersection of occupation lines east-west and north, it is accepted as marking the obliterated corner position.

Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-153497.765
 E-492407.585

2011 The Benton County Surveyor's Office set a 1/2" by 14" iron pipe capped 19552 at the corner position, partially drilled into the found stone. The 2006 coordinates were verified and reference ties established.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 16, Township 37, Range 30, _____ P.M.
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 1-27-77 found a the North Quarter corner evidenced by Occupation of roads ^{DATE:} in North, East and West directions.
 - left monument as found, lowered monument, removed monument (explain)
- On 1-27-77 placed a permanent marker consisting of Railroad Spike

SKETCH OF REFERENCE TIES



Refer to next page

Statement of evidence relative to this corner location is on back of page. #147066

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William F. Lunsar 1-27-77
SIGNATURE DATE

Registration No. 9394

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at _____ P.M. on the 20th day of December A.D., 1977


Register of Deeds F. G. Johnson
By _____, Deputy

DOCUMENT NO. 147066

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 27 day of January, 1977
 I did Find the North Quarter corner of Section 16,
 Twp. 37, Rg. 30, Benton County, Minnesota, which
 was evidenced by Occupation of roads in North, East and West
directions.

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of Railroad Spike and that
 I did establish witness or reference monuments as shown below:

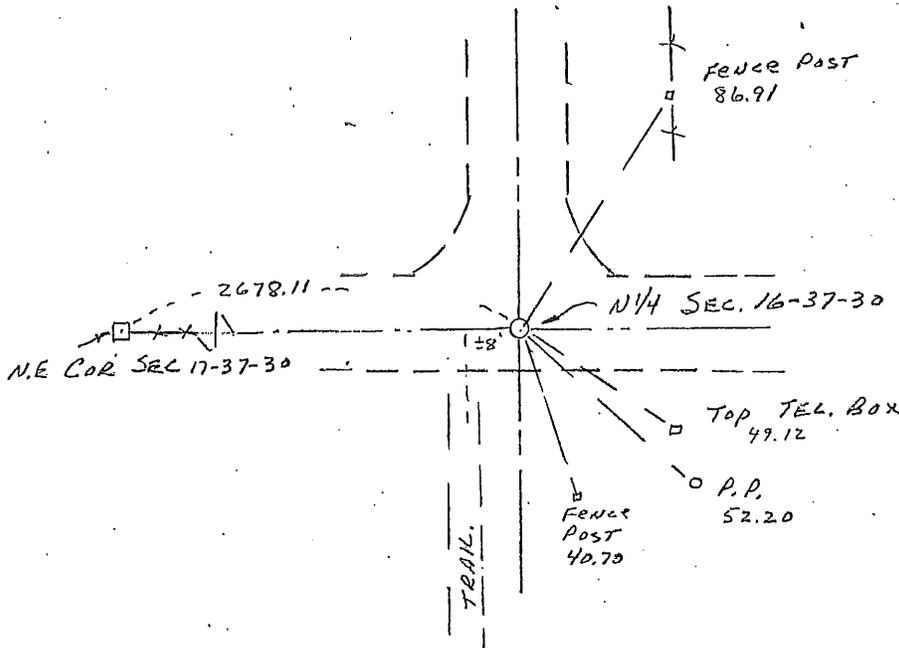

147066

I hereby certify that the
 above is true and correct
 and that I am a registered
 Land Surveyor under the laws
 of the State of Minnesota.

William R. Jensen

Minn. Registration No. 9394

Office of the Register of Deeds,
Benton County, Minn.

I hereby certify that the within
 instrument was filed for record
 in this office on the 20 day of
December, 1977. A. J. M.

F. G. Johnson
 Register of Deeds

By _____ Deputy.