

Certified, Filed and or Recorded on
Mar. 23, 2010 AT 11:51AM


Signed: [Signature]
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 18, Township 37, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 23 JAN 08 found a CIM
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____
DATE

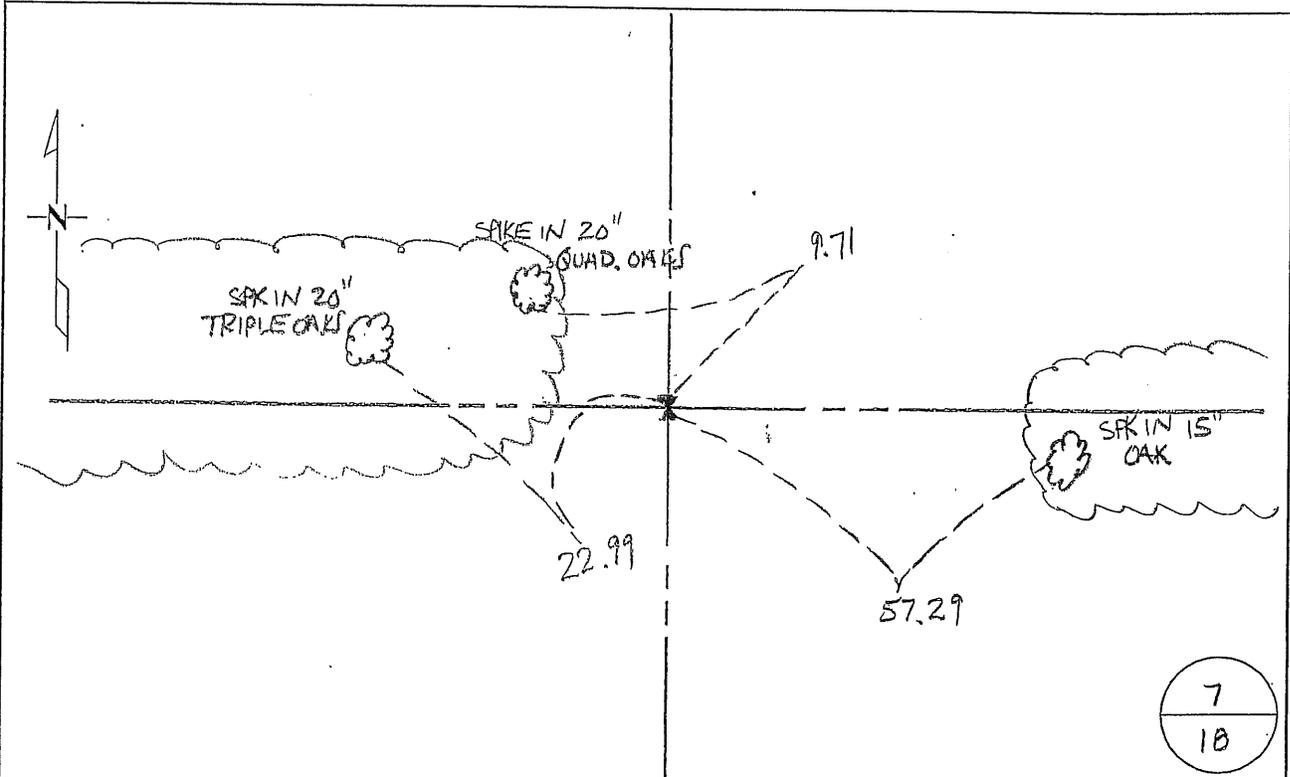

7
18

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 3-22-2010 License No. 19552

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

G181

North Quarter Corner of Section 18, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

1852 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as.

8" Blk Oak	S 14 E	232 links
6" Blk Oak	S 9 W	333 links

1979 Paul Wellen, LS 10461, set a cast iron monument at a fence line south/west. He filed a Certificate of Location (#154386) and notes a distance of 2630.489 feet to the center of Sec 18.

2008 The Benton County Surveyor's Office found a cast iron monument at a fence line south/west. The distance west measures 106 feet long of GLO and the distance east 82 feet long of GLO. It is not unusual for distances to vary 100 feet or more from GLO on the closing distances along the north and west tier of the townships in Benton County. The occupation lines are well established and the CIM is accepted as marking the obliterated corner position. Coordinates were obtained from a side tie from two points set by GPS. Reference ties were established.

Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 153520.069
 E- 481720.150

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I did set the North-^{Quarter} Corner of Section 18, Township 37, Range 30, _____ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On 7-20-79 found a fence lines to the south and the west
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a Benton County Cast Iron Monument
DATE

SKETCH OF REFERENCE TIES



Refer to next page

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. ~~Wellen~~ _____
SIGNATURE DATE

Registration No. 10461

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

County Recorder

OFFICE OF THE REGISTER OF DEEDS =
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 1 P: .M. on the 25 day of October A.D., 19 79

County recorder
Register of Deeds F. A. Johnson

By _____, Deputy


DOCUMENT NO. 154386

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 20 day of July, 1979
 I did set the North Quarter corner of Section 18,
Twp. 37, Rg. 30, Benton County, Minnesota, which
 was evidenced by Fence lines to the south and the west. This corner is
2630.48 feet east of the center of Section 18, T37N, R30W.

SHOULD
BE
2,639.11
NORTH

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of Benton County Cast Iron Monument and that
 I did establish witness or reference monuments as shown below:

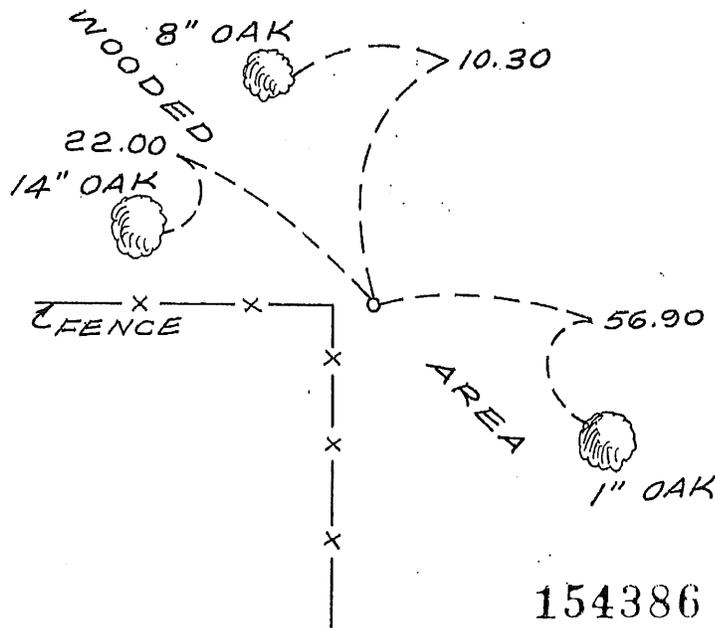

79-110 B-16 P-14

I hereby certify that the above
 is true and correct and that I am
 a registered Land Surveyor under
 the laws of the State of Minnesota.

Sandy Miller

Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
 was filed for record in this office on the
25th day of October, 1979 at 1 P.M.

F. A. Johnson
 County Recorder

By _____ Deputy.