

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH 1/4 Corner of Section 27, Township 37, Range 30, 4TH P.M.

STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9/17/90 placed a COUNTY MONUMENT
DATE

SKETCH OF REFERENCE TIES

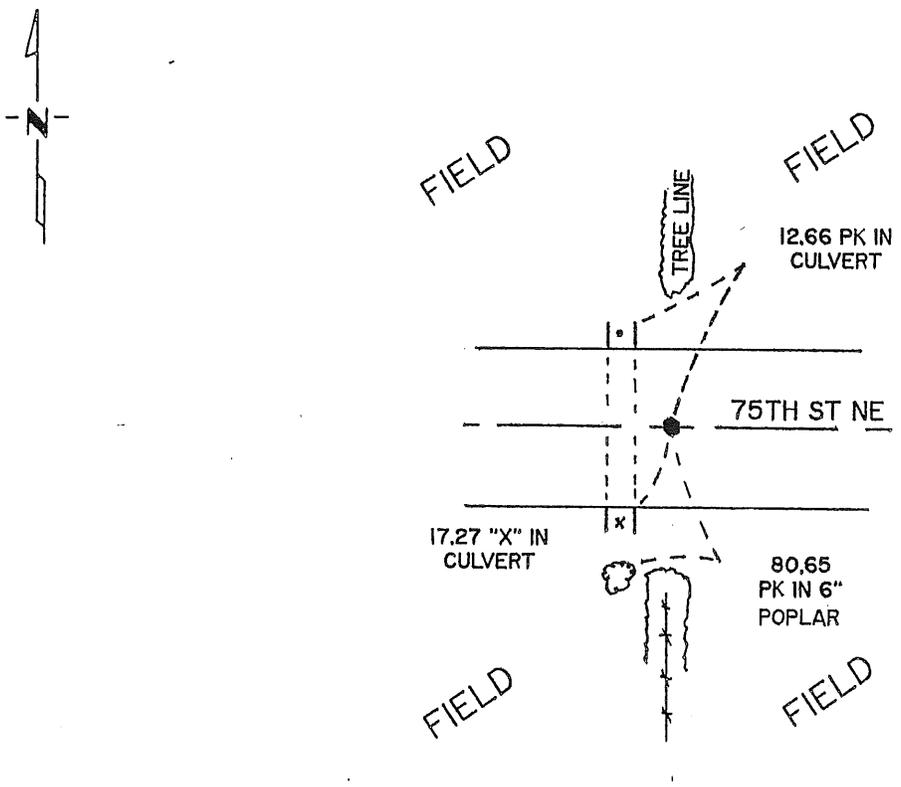

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sam J. Miller 1/14/91
SIGNATURE DATE

Registration No. 10461

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____
By _____, Deputy
DOCUMENT NO. _____

Statement of Evidence:

East 1/4 corner, of Section 27, T
37 N, R 30 W, of the 4th Principal Meridian.

1. During the G.L.O. Survey of 1852, Mr. Edwin James Jr., a U.S. Deputy Surveyor, set a wood post to mark this corner.
2. A search of the Benton County Surveyor records provided no further information for the location of this corner.
3. On September 17, 1990, Paul E. Wellen & Associates, Inc., placed a cast iron monument in the center line of 75th Street NE (east-west) and opposite a fence line and tree line to the south and a tree line north. We also established new reference ties as indicated.

201461

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

FEB 25 8 16 AM '91

ALICE G. ERBE-MEYER
COUNTY RECORDER

BY Jed DEPUTY