

A 379672

Certified, Filed and or Recorded on
JAN. 25, 2011 AT 01:21PM


Signed: bn
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 4, Township 37, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 9/14/10 found a cast iron monument
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

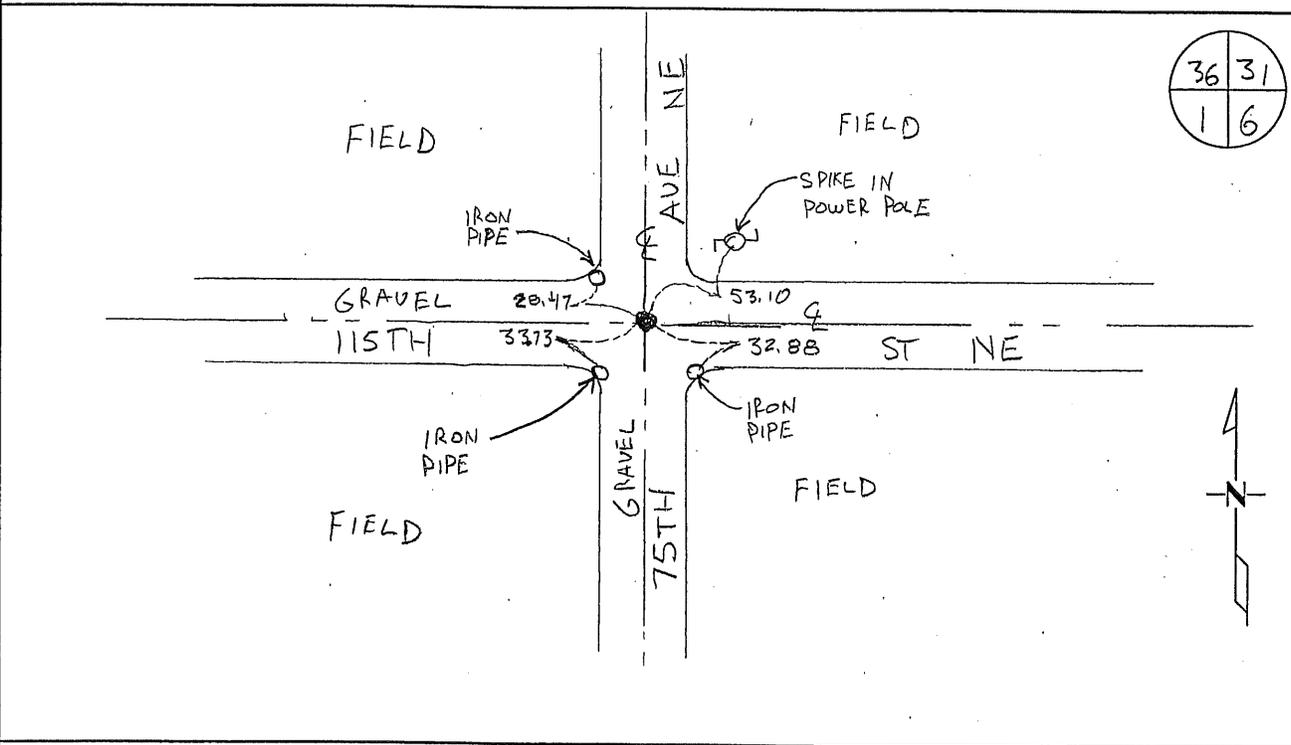

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstach
Benton County Surveyor
License No. 19552

Date: 1/20/2011

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

G012

Northeast Corner of Section 1, Township 37 North, Range 30 West, 4th Principal Meridian,
 Mayhew Lake Township, Benton County, Minnesota.

- 1849 Corner established by Original US General Land Office survey and marked by a wood post with bearing trees noted as.
- | | | |
|-------------|-----------------|----------|
| 14" Elm | N 73 E | 37 links |
| 12" Elm | N 40 W | 31 links |
| 14" W Birch | S 24 W 47 links | |
| 10" Blk Oak | S 43 E | 86 links |
- 1991 William Lunser, LS 9394, notes distance of 2691.42 feet to the North ¼ corner of Sec 1 per Doc. No. 234185.
- 1994 Kevin Festler, LS 22702, found a cast iron monument at the centerline of north/east/south/west roads. He filed a Certificate of Location (#226899).
- 1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment):
 N-164337.526
 E-511067.245
- 2002 Origin of the CIM is not known.
- 2004 Danny Kron, LS 42621, located CIM
 Coordinates Obtained by Traverse
 NAD 83 (1996 Adjustment)
 N- 164337.779
 E- 511066.878
- 2008 Westwood Professional Services Inc. found a cast iron monument at the centerline of north/east/south/west roads and verified the 2004 coordinates.

Township Landmarks: Minnesota Statutes 381.13 required every county to have placed by a surveyor at the northeast corner of each congressional township a durable magnetic monument having a head not less than 3-1/2 inches in diameter and a length of 20 inches. We have not been able to find evidence that this was done in Benton County, but it was done in most counties in the late 1800's and is a possibility that it was also done in Benton County. Many of the counties used stone monuments instead of iron.

- 2010 The Benton County Surveyor's Office found the CIM as previously located at the intersection of centerlines north, south, east and west. The position fits a double over of distances from the west within 0.2 feet, measuring 2751.75 (GLO = 2715.9) south to a CIM at the east quarter of Section 1 and 2690.46 north to a CIM at the at the east quarter of Section 36-38-30. The intersection of centerlines is considered the best available evidence of the corner position so the CIM is accepted as marking the obliterated corner position. The 2004 coordinates were verified and reference ties were established as shown.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 1, Township 37, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 6-30-94 found a Cast Iron Monument
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

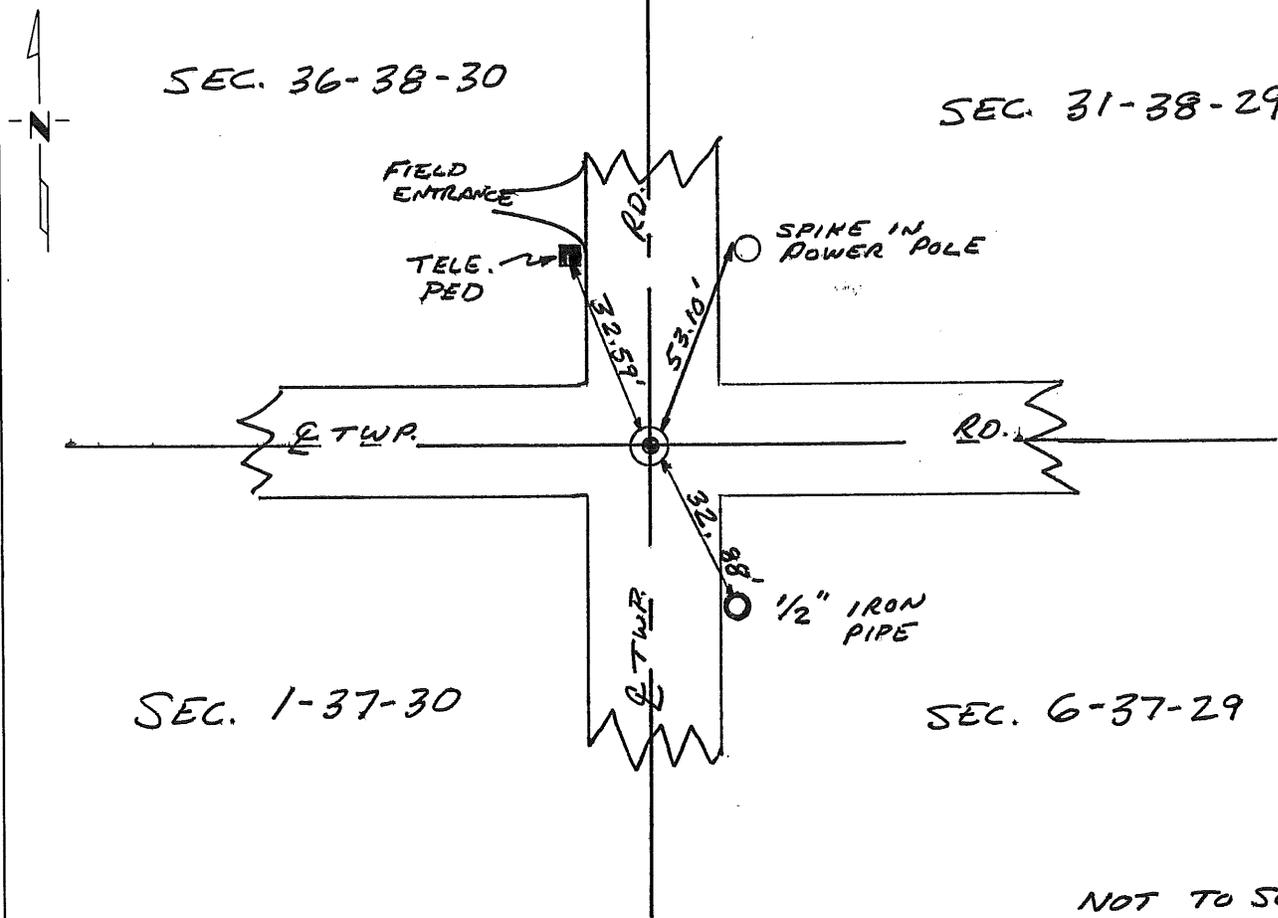

NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] SIGNATURE Nov. 14, 1994 DATE

Registration No. 22702

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The northeast corner of Section 1, Township 37, Range 30, 4th Principal Meridian, Benton County, Minnesota, was set under the Public Land Survey as a post with 3 bearing trees in 1849. No trace of bearing trees or post now exists.

A search by Benton County Highway personnel of available county survey records revealed no additional information on this corner.

On June 30, 1994, Comstock & Davis, Inc., while remonumenting section corners for the purpose of G.P.S. work for Benton County found a cast iron monument at the northeast corner position of Sec. 1, Twp. 37, Rng. 30. Comstock & Davis, Inc. compared the location of the found cast iron monument to the original US Government Survey and found the position to be within reason of the Public Land Survey records. Comstock & Davis, Inc. accepted the found cast iron monument as the position for the northeast corner of Sec. 1. Refer to Job. No. 945017.

226899

FILED
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND OPENED BY 10:00 AM

JAN 19 3 05 PM '95

ALICE G. BARNHART
COUNTY RECORDER

BY mn DEPUTY