

Certified, Filed and or Recorded on
Feb. 08, 2011 AT 11:54AM


Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 2, Township 37, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 09/21/10 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

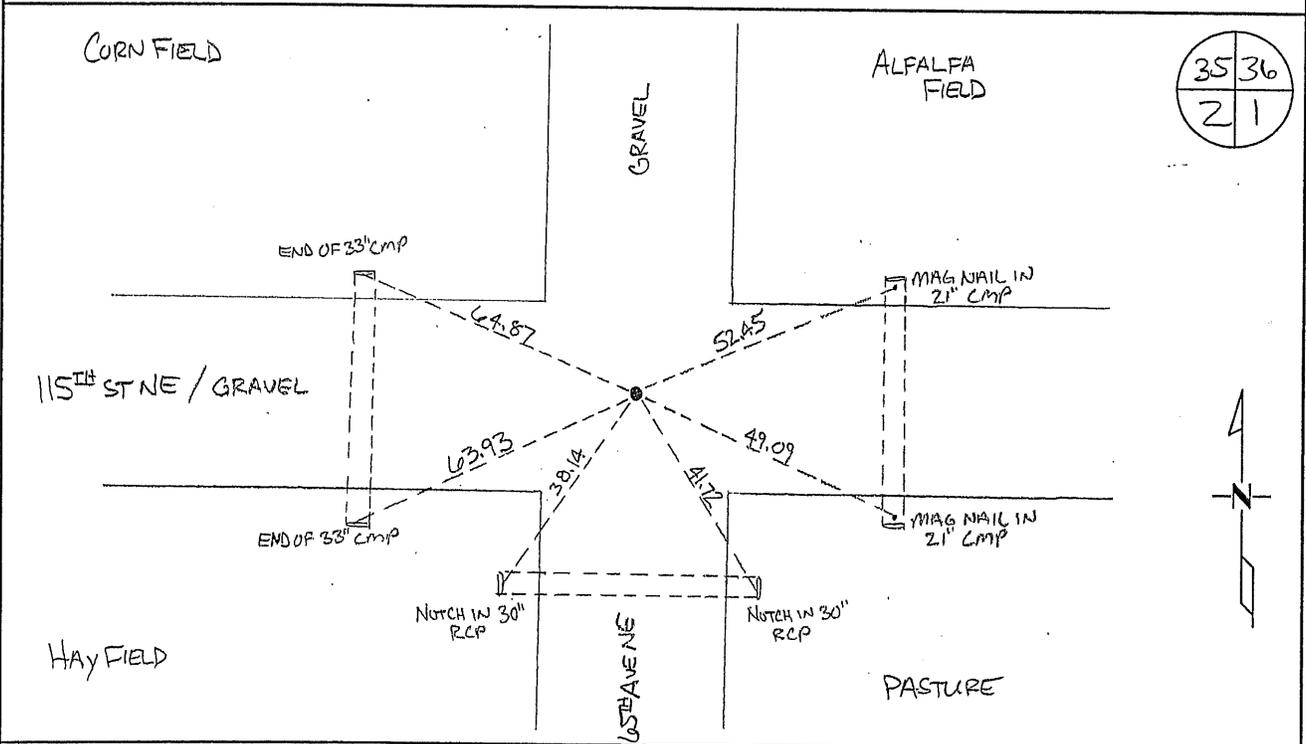

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstich
Benton County Surveyor
License No. 19552

Date: 2/7/2011

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:**G022**

The Northeast Corner of Section 2, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

1849 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as.

6" Tamarack	N 79 1/2 E	22 links
6" Tamarack	N 22 W	28 links
8" Tamarack	S 54 W	14 links
6" Tamarack	S 61 E	17 links

Line trees were noted as a 12" W Ash, East, 19.67 chains, and a 6" Tamarack, West, 20.16 chains

1890 County Road Book, page 32, contains Surveyor's Report by Felix Parrent stating road laid out on section line south from this corner.

1944 County Engineer's Notebook No. 164 contains a road survey for CAR 25 running south to north on section line. Corner is shown marked by a hub set in center of road with town road west and east. Ties same as listed in 1949 below.

1949 County Surveyor's Record Book 1, page 389, shows H. G. Elletson notes a hub at the corner with the following reference ties

Mailbox Post	SW	43.4
3 RD F.P.	NW	44.7

1974 County Highway road alignment surveys note an iron in place at the corner.

1991 William Lunser, LS 9394, found a 1/2" iron pipe near the centerline of roads north/south and east/west. He replaced it with a cast iron monument and filed a Certificate of Location (#234187). He notes a distance of 2691.66 feet to the North 1/4 corner Sec 1 and a distance of 2881.41 feet to the East 1/4 corner Sec 2.

1992 County reference ties to a found cast iron monument

E edge stop sign post	NW	43.85
S edge stop sign post	NE	48.10
S edge stop sign post	SW	31.35

2008 Westwood Professional Services Inc. found a cast iron monument at the centerline of north/east/south/west roads.

Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 164341.601
 E- 505684.003

Benton County Surveyor's Office
Jerome C. Wittstock, County Surveyor
Minnesota License No. 19552



2010 The Benton County Surveyor's Office found a cast iron monument at the intersection centerlines as noted in 2008. The roads appear to be laid out on the section lines as noted in 1890. Distances for a half mile east and south fit those from 1991. Distances north and south fit the 1944 distances relatively well. Ties from 1992 to the stop signs northeast and southwest were found. The CIM is accepted as marking the obliterated corner position. The 2008 coordinates were verified and reference ties were established as shown.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST corner of Section 2, Township 37, Range 30, 4th P.M.
Benton County, Minnesota.

On Mar 22, 1991, A cast iron monument (C.I.M.) was placed at this location.

SKETCH OF REFERENCE TIES

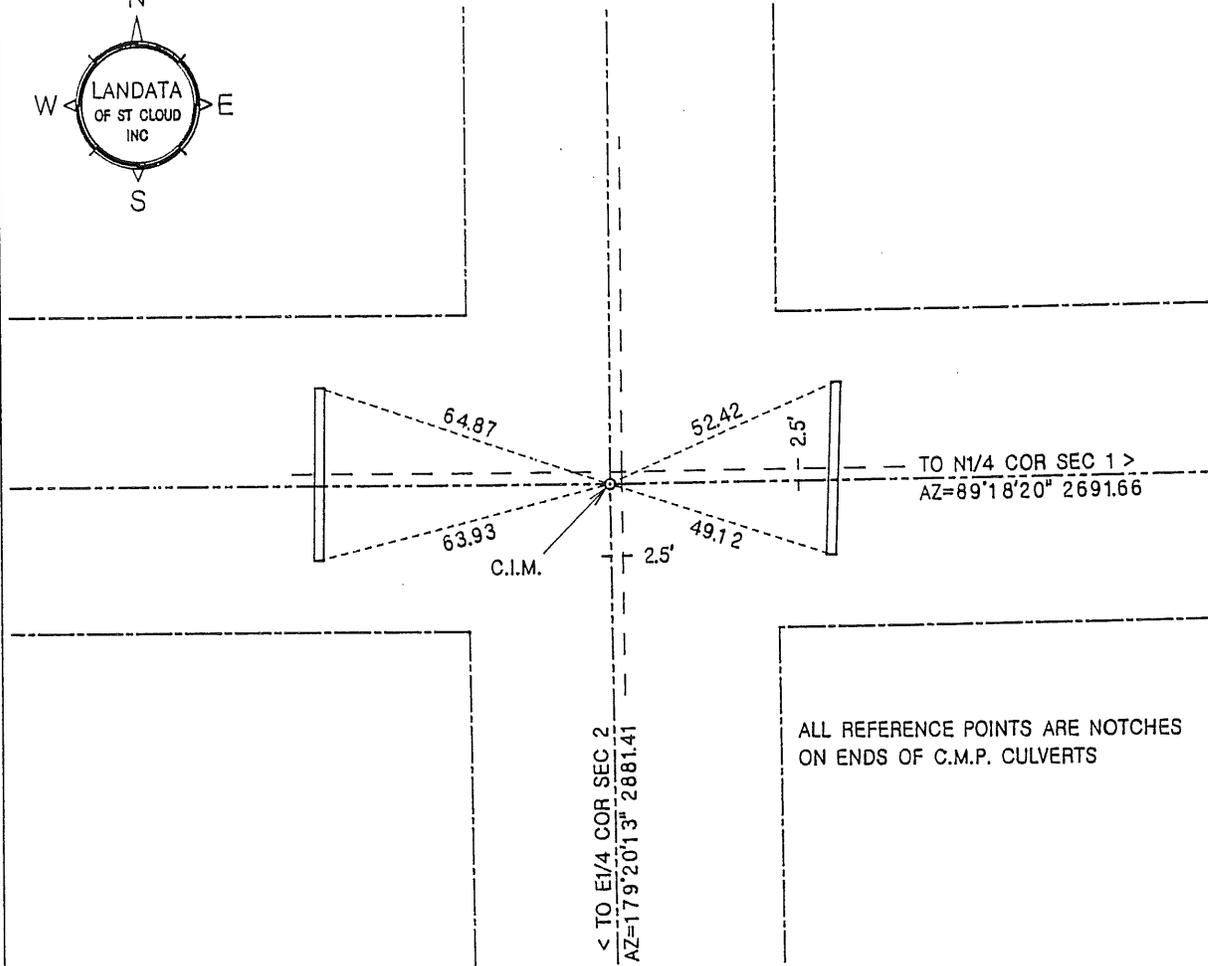

ALL REFERENCE POINTS ARE NOTCHES ON ENDS OF C.M.P. CULVERTS

Statement of evidence relative to this corner location on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William F. Lunser 3/13/91
 William F. Lunser, L.S. Date
 Mn Reg No 9394

FB;131/54 DISC;14

OFFICE OF THE COUNTY RECORDER
Benton County, Minnesota

I hereby certify that this document was filed in this office at ___:___ M. on the ___ day of _____, 19__.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

A 1974 road alignment survey on file in the offices of the Benton Co. Hwy Dept indicates an iron pipe at this location.

A search of the area revealed a one half inch iron pipe in place in close proximity to road centerlines north, south, east and west.

I therefor accepted the in place monument as the best evidence of the G.L.O.'s position and replaced the same with a cast iron monument.



William F. Lunser, L.S.

2 3 4 1 8 7

BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

APR 10 2 35 PM '96

ALICE C. ENGELMEYER
COUNTY RECORDER

BY  DEPUTY xm