

A 362562

Certified, Filed and or Recorded on
Dec. 24, 2008 AT 08:45AM


Signed: BW
MARILYN J NOVAK J V T
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 7, Township 37N, Range 30W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/30/08 found a 1/2" OPEN IRON PIPE DOWN 0.2'
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____

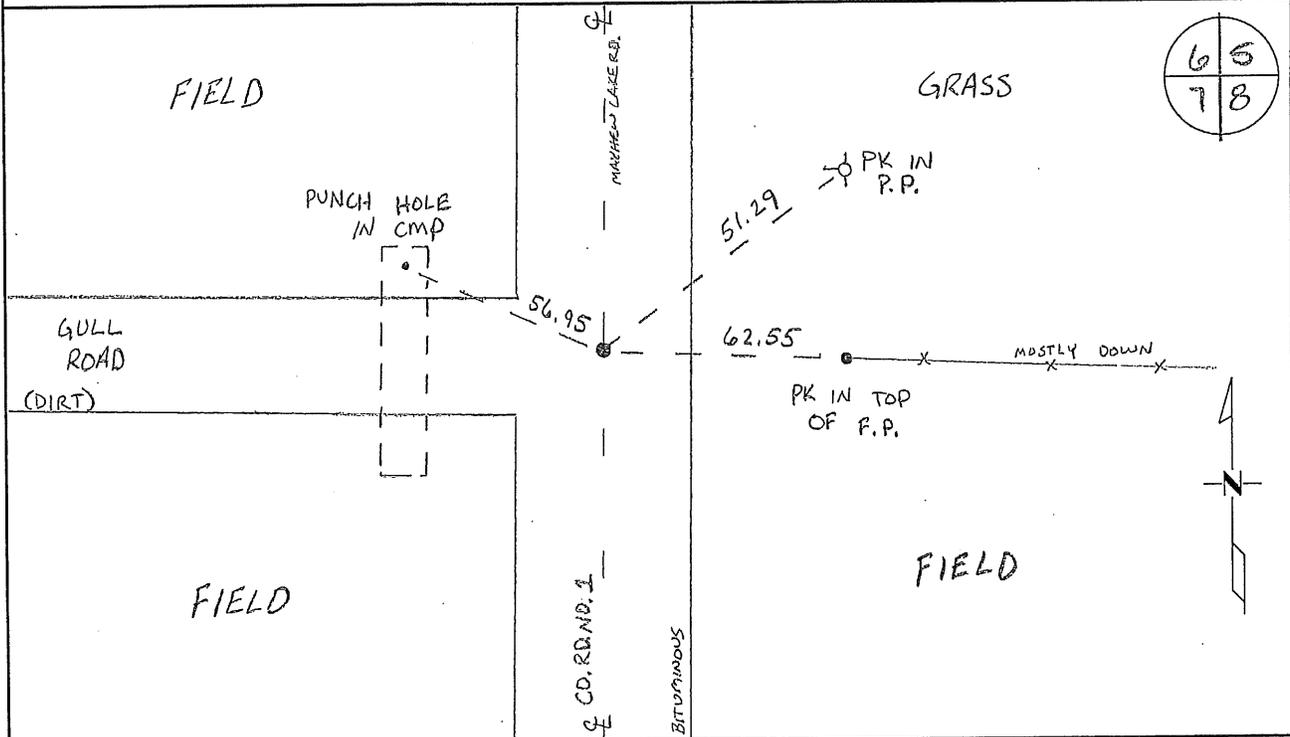


Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 12/09/2008



Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

G072

Northeast Corner of Section 7, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

1852 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as.

14" Blk Oak	N 73 E	236 links
12" Bur Oak	S 2 E	2150 links

1876 County Surveyor's Record Book 1, page 233, shows a road survey by R. Cronk along the east line of Section 7.

1923 County Surveyor's Record Book 1, page 399, and County Engineer's Notebook No. 40, notes the following reference tie to an iron:

Cor FP	E	28.9
--------	---	------

Stationing gives distances of 2629.3 feet to the East ¼ corner of Section 7 and 2712.0 feet to the East ¼ corner of Section 6 with a deflection angle of 0-20' left (running south to north).

1938 County Engineer's Notebook No. 116 contains a survey for SAR No. 1 that notes the following ties to a spike in road with road west and fence east:

FP	E	29.4	FP	SW	37.1
----	---	------	----	----	------

Stationing gives distances of 2631.1 feet to the East ¼ corner of Section 7 and 2712.2 feet to the East ¼ corner of Section 6 with a deflection angle of 0-25' left (running south to north).

1980 William Lunser, LS 9394, found a nail and disk in the centerline of a road north/south and a fence line east. He replaced it with a RR spike and filed a Certificate of Location (#158863). Shows distance of 2629.53 feet to the East ¼ corner of Section 7.


2008 Westwood Professional Services Inc. found a ½" open pipe at the centerline of road north/south and a fence line east. Distance to the E ¼ Cor. of Sec. 6 measures 2705.24 ft. and distance to the E ¼ Cor. of Sec. 7 measures 2631.71 ft., with a deflection angle between said points (south to north) as 0-19' 12"-left, which agrees with 1923 measurements. Lunser's RR Spike from 1980 was not recovered. Lunser's tie to said E ¼ of Sec. 7 falls 2.13 ft. short of current measurements. The Surveyor accepts the ½" monument as marking the best evidence and made ties to same.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 158787.274
 E- 484437.709

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 25 day of April, 1980
 I did Find the Northeast corner of Section 7,
 Twp. 37, Rg. 30, BENTON County, Minnesota, which
 was evidenced by Found Nail & Disc. in Centerline Road & Fence
Line to East

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of Rail Road Spike and that
 I did establish witness or reference monuments as shown below:

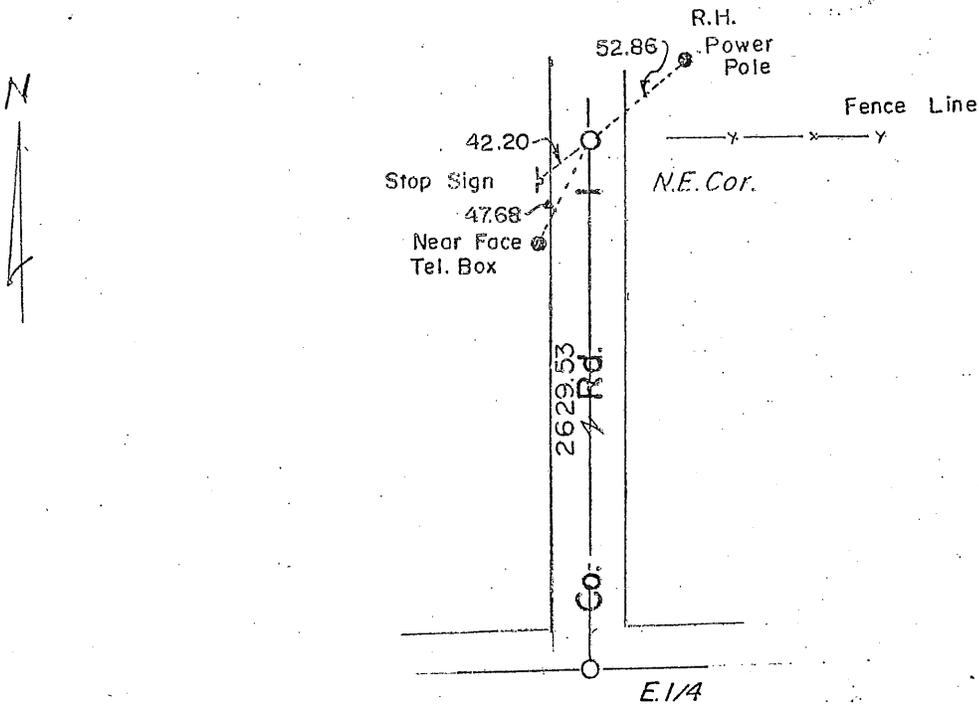

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

William F. Lunde
 Minn. Registration No. 9394

158863
~~County Recorder~~
 Office of the Register of Deeds,
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 7th day of April, 1981. 3 P.M.

F.A. Johnson
 Register of Deeds County Recorder
 By _____ Deputy.