

A 36832A

Certified, Filed and or Recorded on
Aug. 24, 2009 AT 08:11AM


Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 8, Township 37, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 07/06/09 found a 1/2" IRON PIPE
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

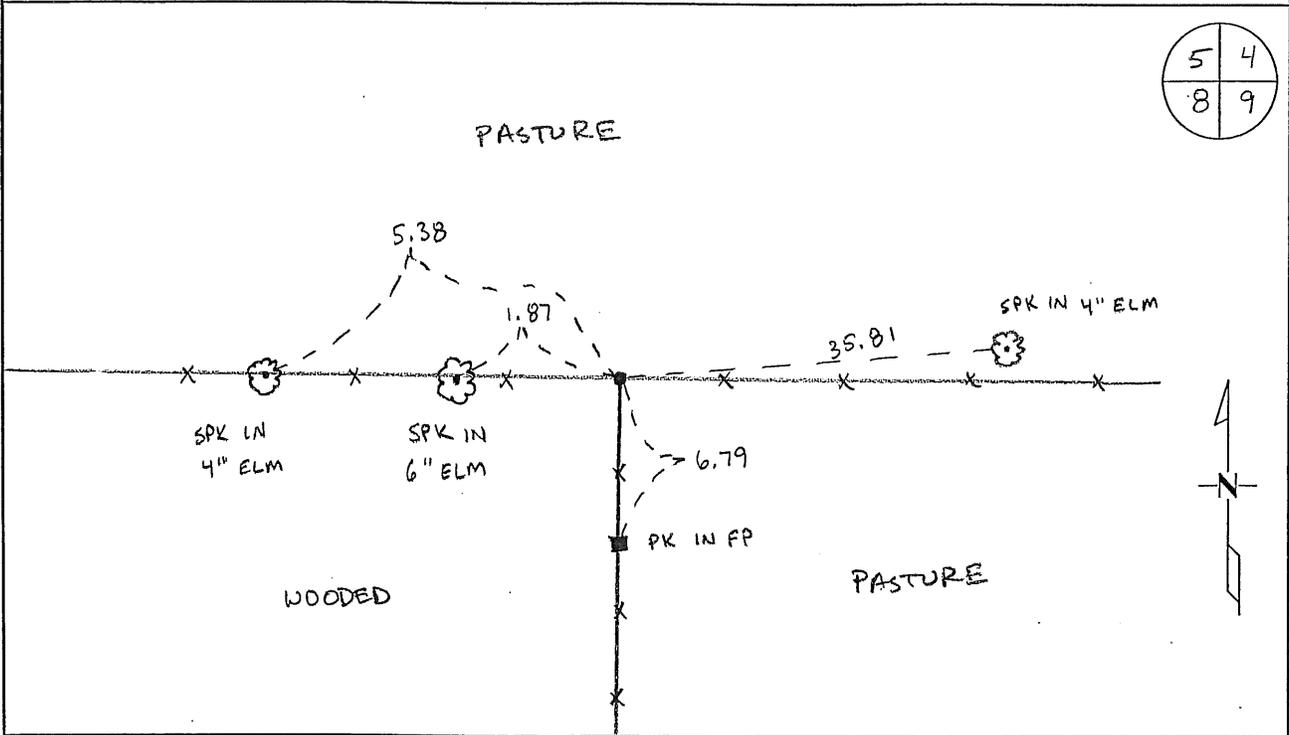

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 21 August 2009

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:**G082**

Northeast Corner of Section 8, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

1852 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as.

14" Aspen	N 67 1/2 W	308 links
10" Aspen	N 33 1/2 E	124 links

1991 David Regan, LS 12236, set a 1/2" pipe at the intersection of fence lines east/west/south. He filed a Certificate of Location (#223480).

2002 No resurvey information was found on this corner in the Benton County records.

2009 Westwood Professional Services, Inc. found a 1/2-inch open iron pipe at the fence at the intersection of fences east-west and south. Distances north and south fit well with GLO distance and the distances west and east each measure about 26 feet longer than the GLO distances. Believing the pipe and fences to be the best available evidence, the pipe was left in place, located by GPS and tied out with reference points as shown.

Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-158819.171
 E-489783.752

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


~~North~~~~NORTHEAST~~ Corner of Section 8, Township 37, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 3-15-91 placed a 1/2" Iron Pipe at intersection of fence lines, East,
DATE West, and South

SKETCH OF REFERENCE TIES

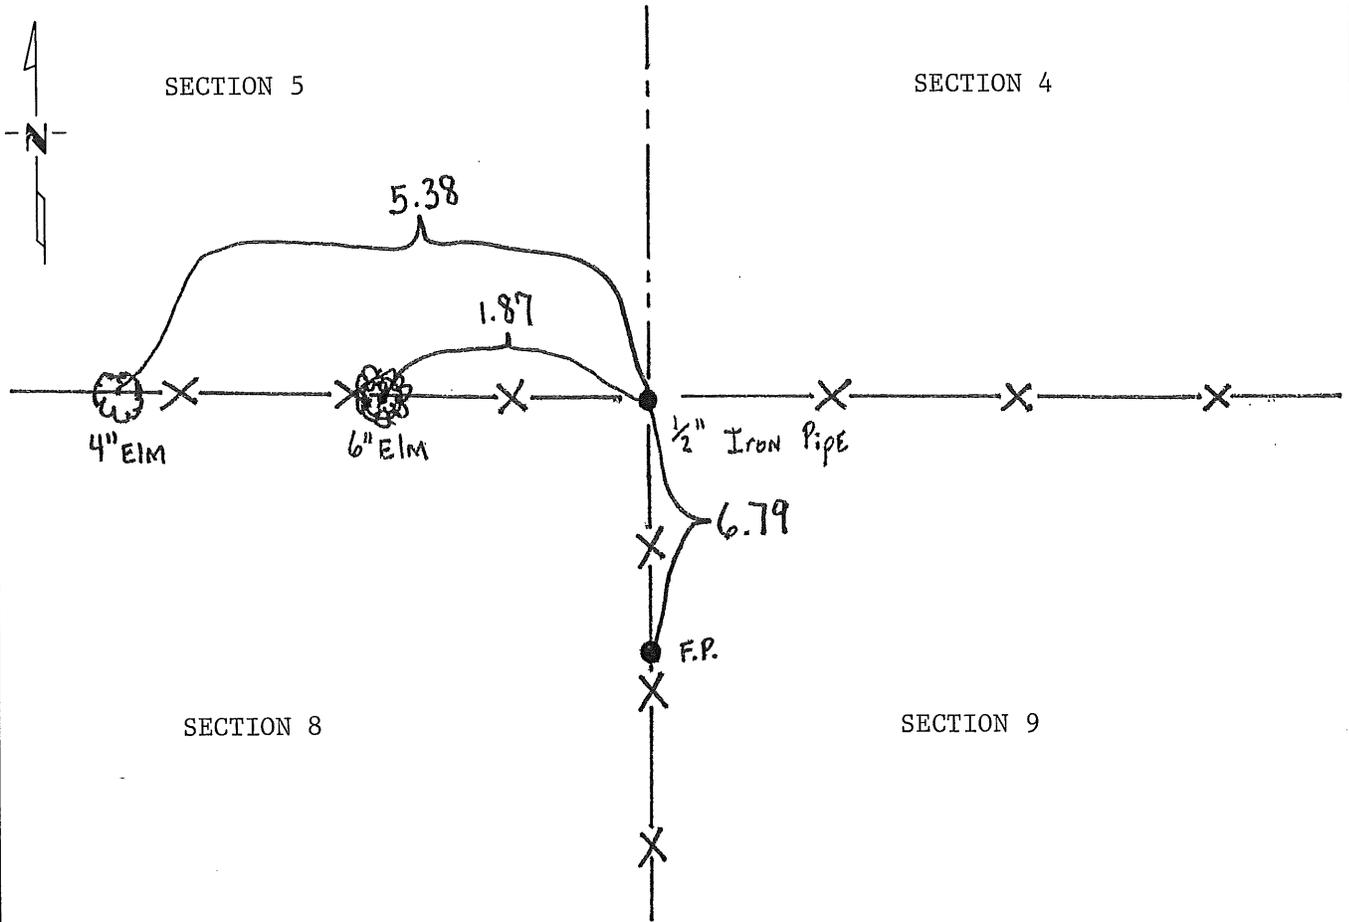

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David G. Ryan 5/12/94
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The G.L.O. survey was done in 1852 by Edwin James.

The County Surveyors records were searched with no reference to this corner.

On 3/91, Regan Land Surveyors, Inc. searched the area, then set a ½ inch iron pipe at the intersection of fence lines, East, West, and South.

2 2 3 4 8 0

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JUN 17 1 02 PM '94

ALICE CLARK LAMBERT
COUNTY RECORDER

BY Jad DEPUTY