

3-16

A 372832

Certified, Filed and or Recorded on
Mar. 16, 2010 AT 12:36PM


Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH EAST Corner of Section 16, Township 37, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On June 2006 found a Cast Iron Monument removed during excavation.
DATE
- left monument as found lowered monument removed monument (explain)
- On 11-30-06 placed an 1/2" I.P. # 19552
DATE

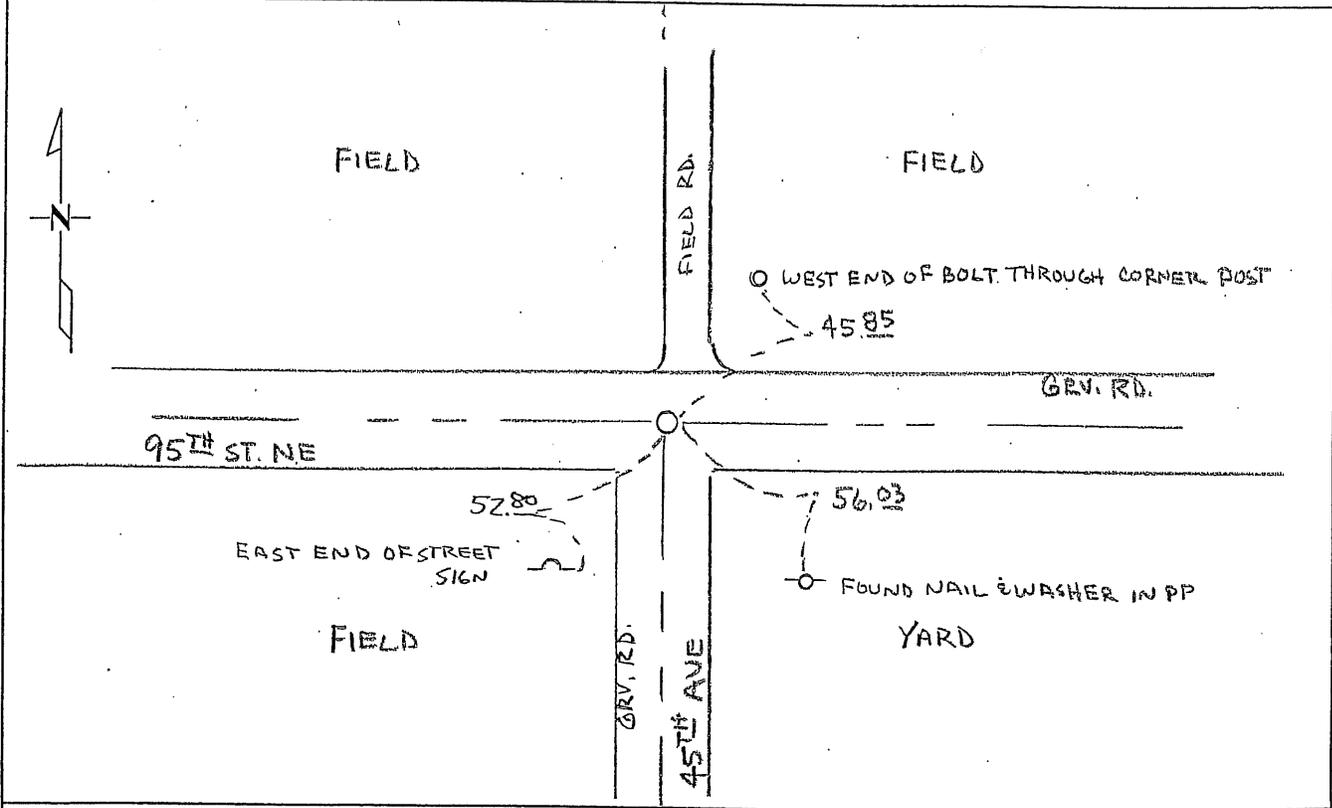

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 3/16/2010 License No. 19552
Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

G162

Northeast Corner of Section 16, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

1852 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as:

12" Bur Oak S 80 E 562 links

1899 Road Survey Report by John E. Whilt, County Surveyor, shows survey running west to east on section lines.

Undated County Surveyor's Record Book 1, page 417, notes a stone with an "X" and the following reference ties:

FP	N	52.8
TP	NE	37.2
PP	SE	57.2

1989 Dave Regan, LS 12236, set a cast iron monument at the intersection of township roads (east/west/south) and a fence line (north). He filed a Certificate of Location (#195020).

2006 Westwood Professional Services Inc. excavated a 10-foot by 10-foot by 4-foot deep hole with a Benton County backhoe. No additional evidence of the corner was found. A ½" iron pipe capped 19552 was set at the centerline of roads south/east/west in place of the found CIM.

County Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-153506.215
E-495087.648


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 16, Township 37, Range 30, 4TH P.M.
STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 7/14/89 placed a Cast Iron Monument
DATE

SKETCH OF REFERENCE TIES

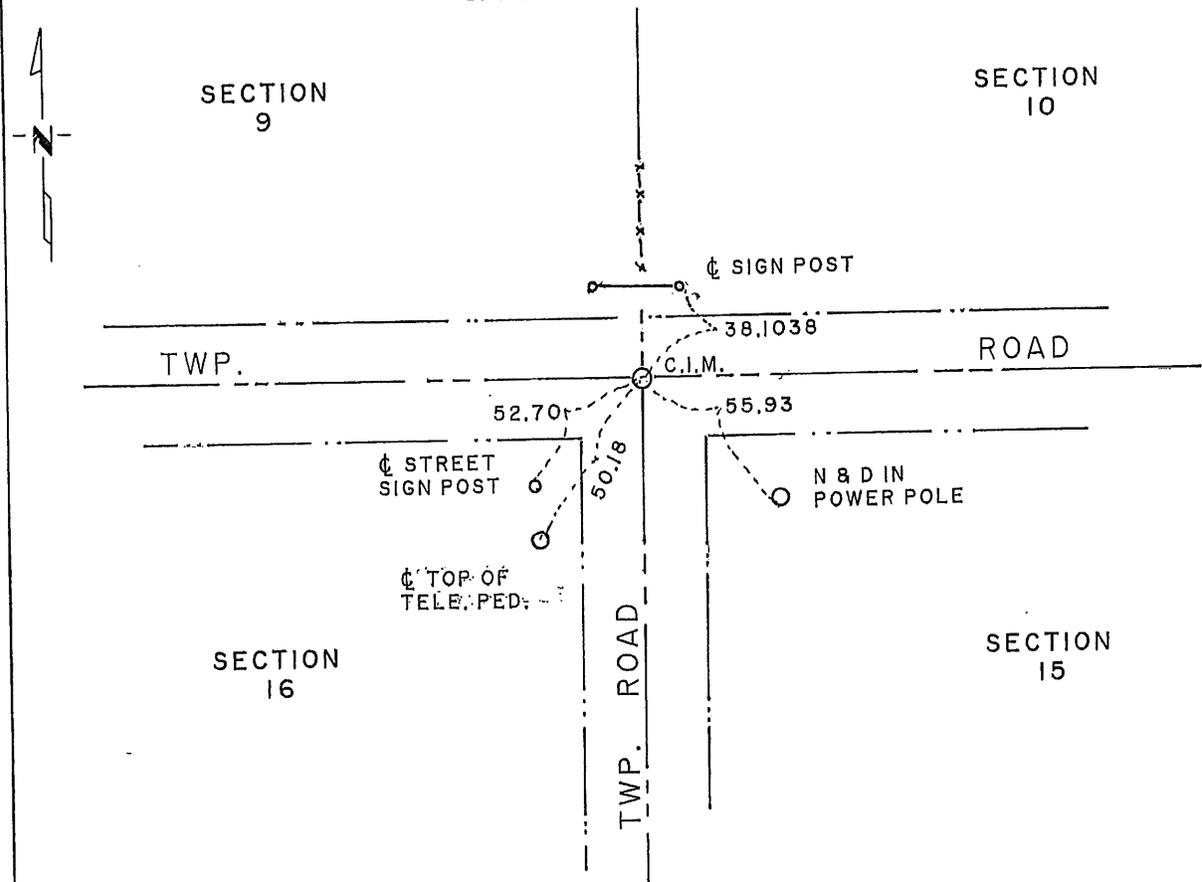

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David J. Ryan 10/30/89
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The G.L.O. survey was done in September, 1852 by Edwin James.

The County Surveyors records in Book 1, page 403, shows a stone at this corner with no date given.

On 7/14/89, David P. Regan Land Surveying, Inc. searched and dug the area and found nothing. A Cast Iron Monument was set at this corner in the centerline of the roads from one county tie.

195020

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

NOV 2 4 23 PM '89

ALICE G. ENGELMEYER
COUNTY RECORDER

BY *g* DEPUTY