

Certified, Filed and or Recorded on
Mar. 16, 2010 AT 12:37PM


Signed: OK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH EAST Corner of Section 19, Township 37, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found lowered monument removed monument (explain)
- On 11-30-06 placed an "T" FENCE POST
DATE

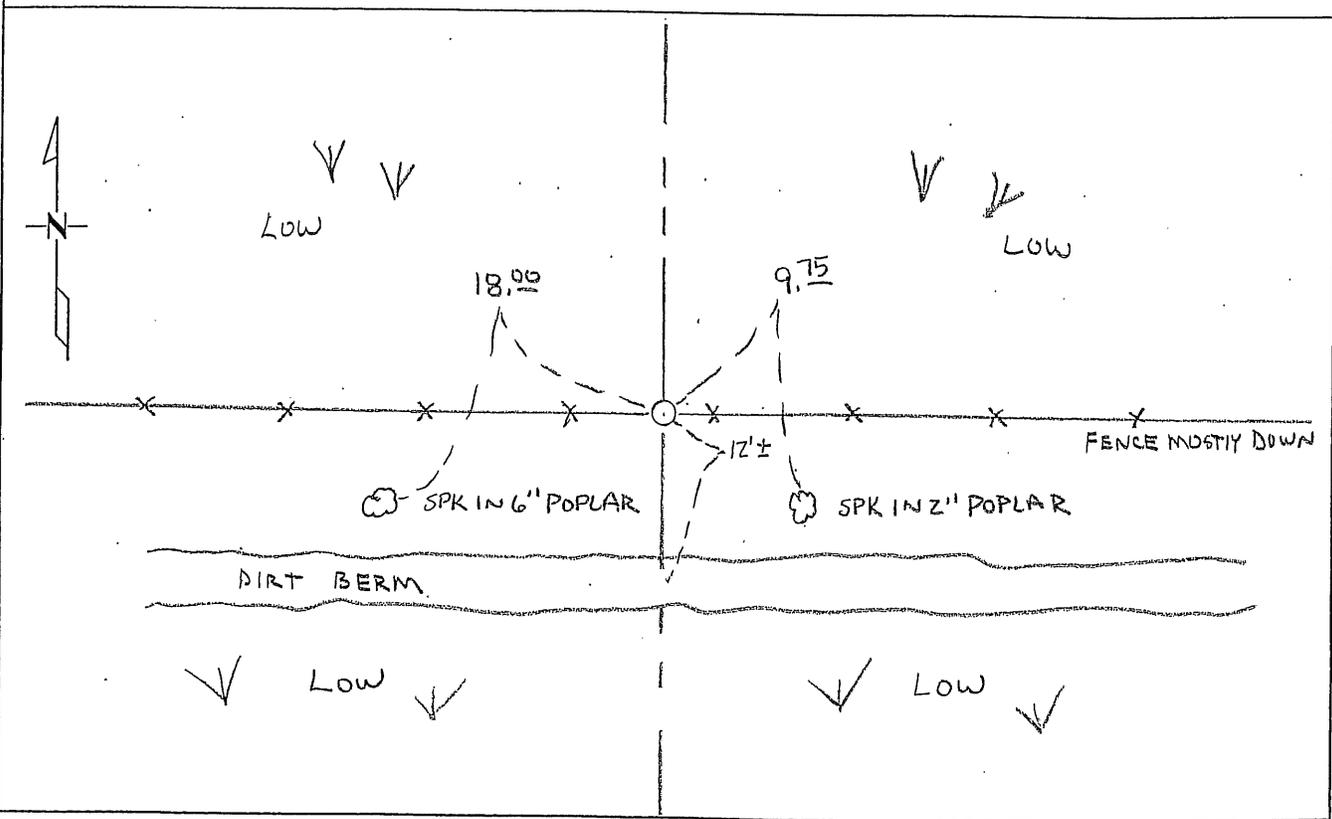

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock Date 3/16/2010 License No. 19552
Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

G192

Northeast Corner of Section 19, Township 37 North, Range 30 West, 4th Principal Meridian, Mayhew Lake Township, Benton County, Minnesota.

1852 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as.

14" Blk Oak	S 19 E	553 links
15" Aspen	N 72 E	407 links

2002 No resurvey information was found on this corner in the Benton County records.

2006 The Benton County Surveyor found an east-west fence line, but no evidence of the corner monument. A fence line was found a quarter mile to the north, which was projected south to the intersection of the east-west fence. This position fits a double of the distance from the east within 4 feet and fits GLO within 2 feet. The distance west is 112 feet long of GLO, but the closing distances seldom measure well compared to GLO. The distance north measures 33 feet long of GLO and the distance south measures 80 feet long of GLO. Many distances measure one tally or more different than GLO in Benton County. A "T" post was set in the swamp in the mostly down east-west fence on the projection of the fence to the north to mark the obliterated corner location.

Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-148171.546
E-484304.903