

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 21, Township 37, Range 30, 4TH P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 9/17/90 found a R R SPIKE  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 9/19/90 placed a COUNTY MONUMENT  
DATE

## SKETCH OF REFERENCE TIES

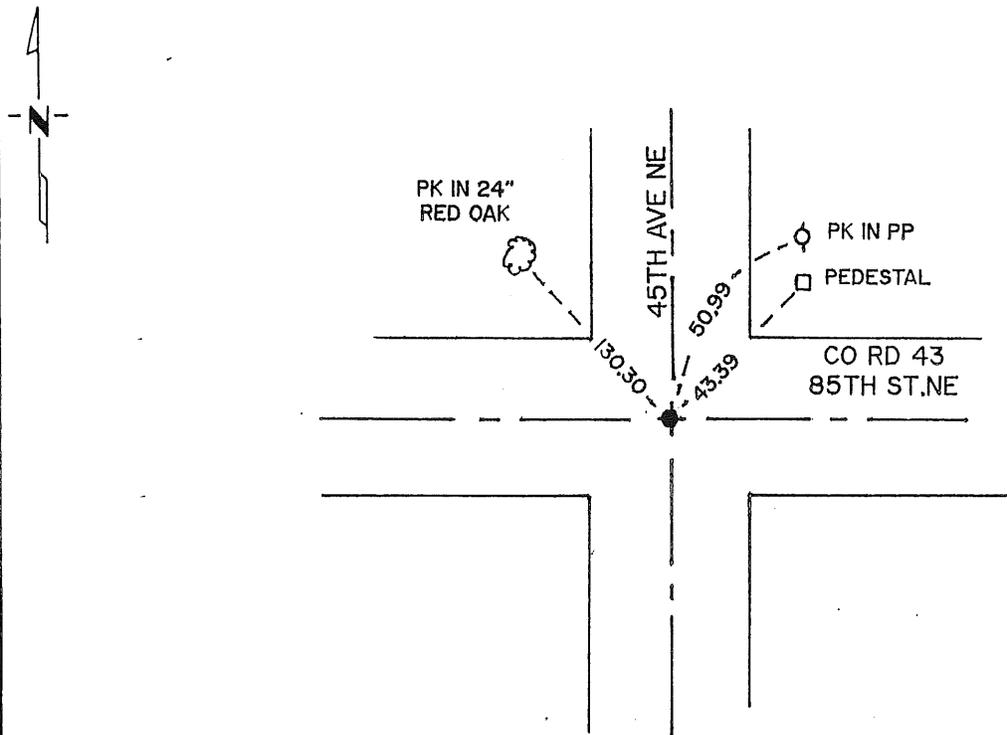

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision

Sam E. Miller 1/14/91  
SIGNATURE DATE

Registration No. 10461

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

Northeast corner of Section 21, T  
37 N, R 30 W, 4th Principal Meridian.

1. During the G.L.O. Survey of 1852, Mr. Edwin James Jr., a U.S. Deputy Surveyor set a wood post to mark this corner.
2. A search of the Benton County Surveyor records indicate a hub with reference ties for the location of this corner.
3. On September 19, 1990, Paul E. Wellen & Associates, Inc., found a railroad spike in the intersection of the center lines of 45th Avenue NE (north-south) and 85th Street NE (east-west). We removed said railroad spike and placed a cast iron monument at this location. We also established new reference ties as indicated.

201459

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AFTER RECORDED ON

FEB 25 8 14 AM '91

ALICE G. EGGEMEYER  
COUNTY RECORDER

BY Jew DEPUTY