

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 22, Township 37, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 8-18-92 found a P.K.
DATE

left monument as found, lowered monument, removed monument (explain)

On 8-18-92 placed a Cast Iron Monument (Flush)
DATE

SKETCH OF REFERENCE TIES

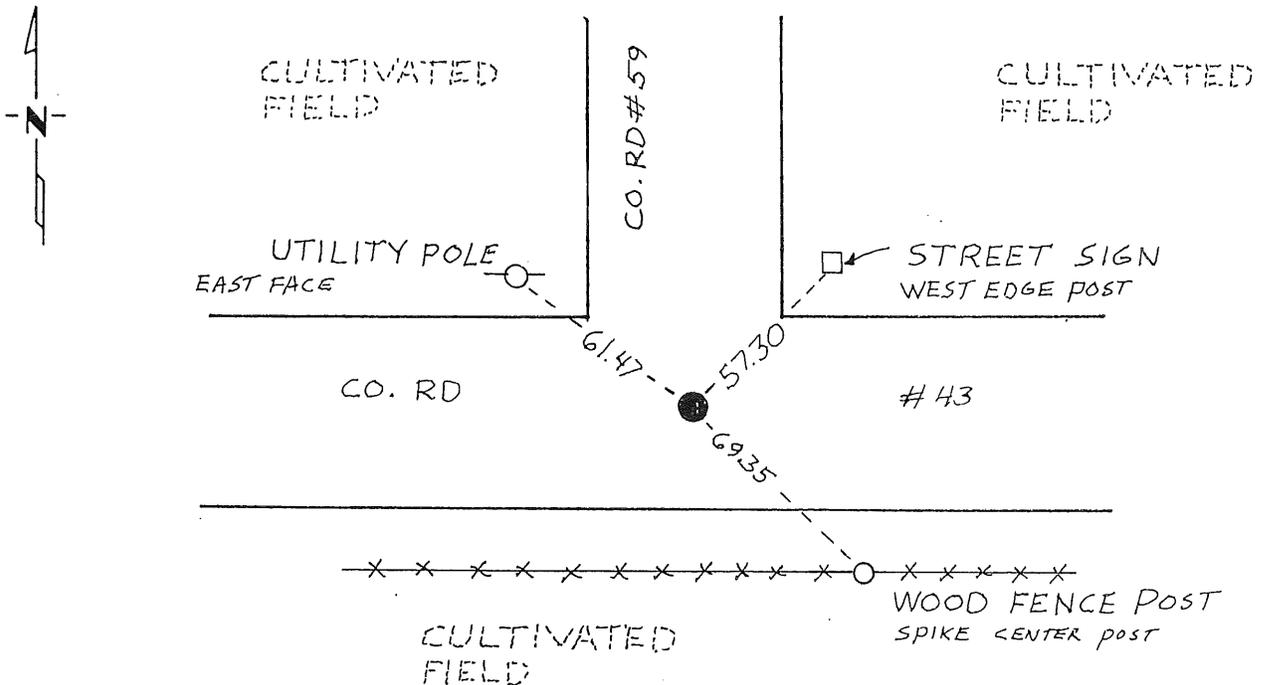

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 2-16-93
SIGNATURE DATE

Registration No. 10461

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

NORTHEAST CORNER, SECTION 22, T 37N, R 30W, 4TH P.M.

1. During the G.L.O. survey of 1852, Mr. Edwin James Jr., a U.S. Deputy Surveyor, set a wood post to mark said corner.
2. Benton County's old surveyor's books provided no information to locate said corner.
3. On August 18, 1992, Paul E. Wellen & Associates searched for said corner at intersection of County Road #43 and county Road #59, we found a p.k. at center line-center line. We accepted as evidence of said corner. On August 18, 1992. we set a Cast Iron Monument over p.k. nail. Also established new reference ties as indicated.

216298

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JUL 14 1 23 PM '93

ALICE G. EISELEMEYER
COUNTY CLERK

BY *[Signature]* DEPUTY