

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH EAST Corner of Section 28, Township 37, Range 30, 4TH P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 9/17/90 placed a COUNTY MONUMENT
DATE

SKETCH OF REFERENCE TIES

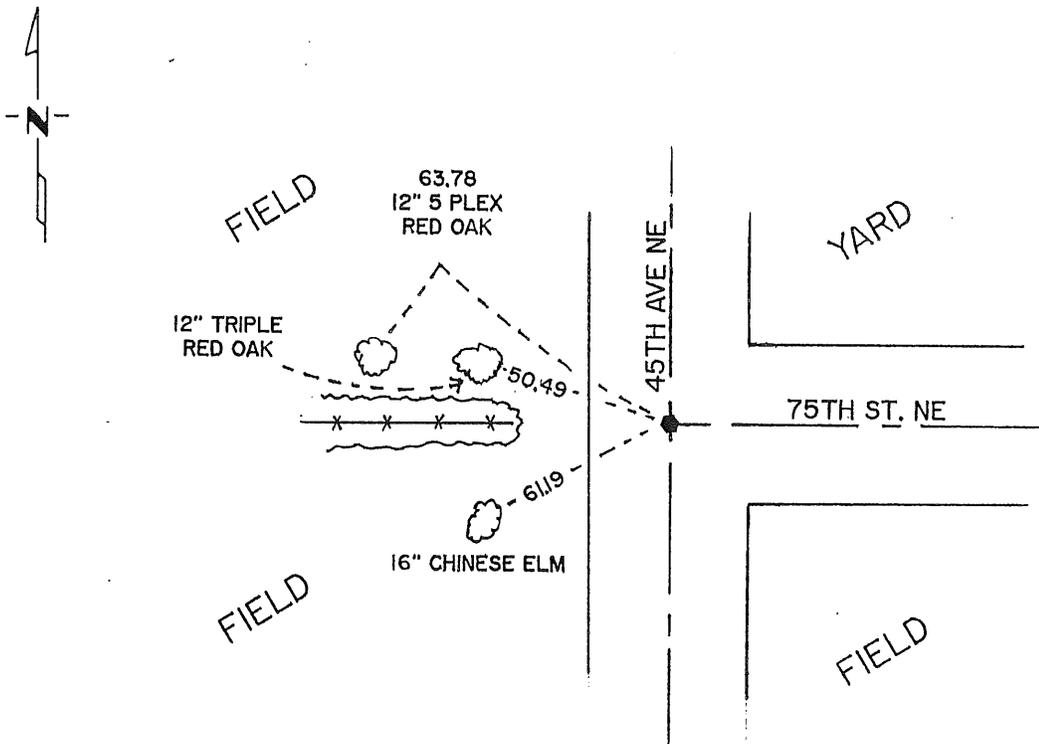

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul J. Miller 1/14/91
SIGNATURE DATE

Registration No. 10461

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

Northeast corner, of Section 28, T
37 N, R 30 W, of the 4th Principal Meridian.

1. During the G.L.O. Survey of 1852, Mr. Edwin James Jr., a U.S. Deputy Surveyor, set a wood post to mark this corner.
2. A search of the Benton County Surveyor records provided no further information for the location of this corner.
3. On September 18, 1990, Paul E. Wellen & Associates, Inc., placed a cast iron monument at the intersection of the center lines of 45th Avenue NE (north-south) and 75th Street NE (east) and opposite a fence line and tree line to the west. We also established new reference ties as indicated.

201464

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

FEB 25 8 17 AM '91

ALICE C. ENGELMEYER
COUNTY RECORDER

BY Jed DEPUTY