

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 01:39PM


Signed: BW
MARILYN J NOVAK V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 8, Township 37N, Range 28W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/15/08 found a 1/2" OPEN PIPE DOWN 0.5'
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

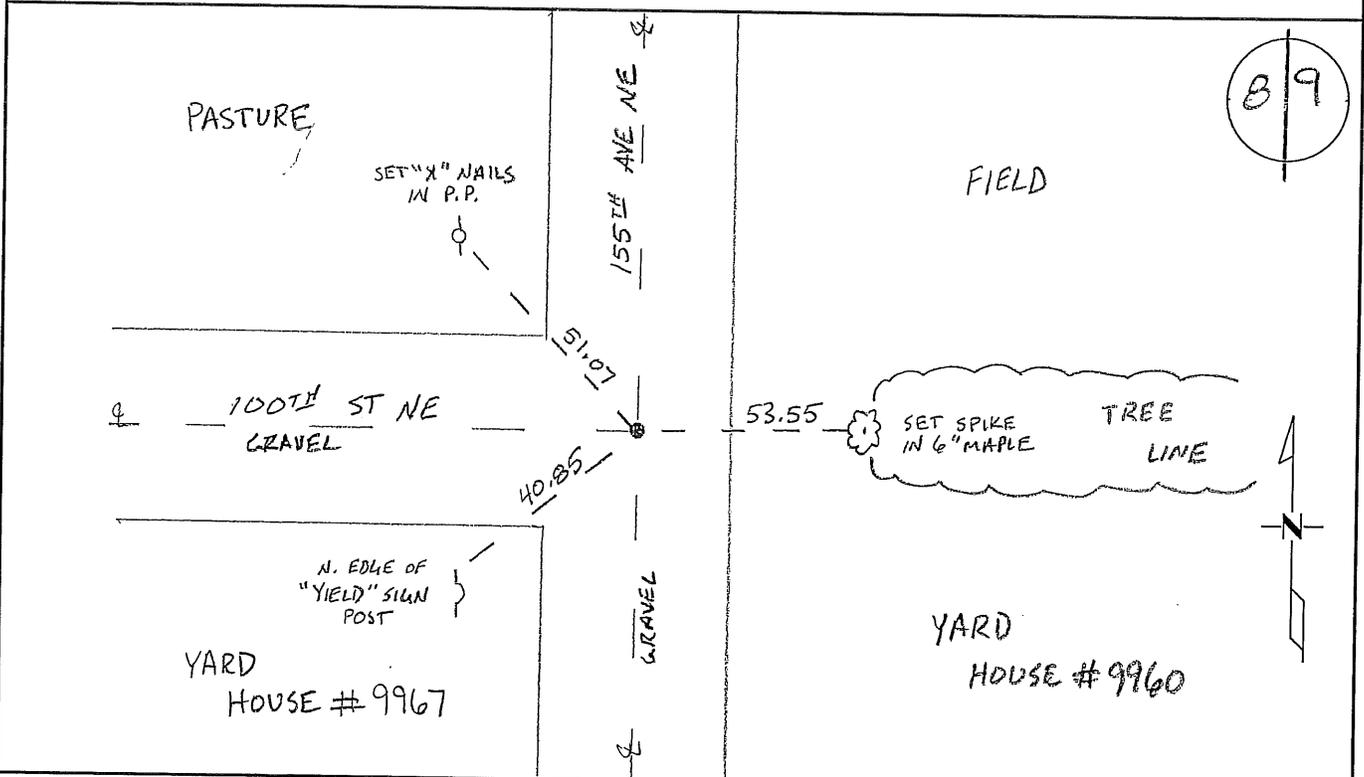

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature *Jan W. Oly*
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

I083

East Quarter Corner of Section 8, Township 37 North, Range 28 West, Maywood Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

9" Sugar	S 29 E	8 links
10" Sugar	N 56 ½ W	30 links

1892 Road Survey Report by Felix Parent, County Surveyor, shows survey terminating at this corner from the west along the quarter line with a distance of 79.06 chains to the East ¼ corner of Sec. 7.

1938 County Engineers' Notebook No. 119 shows survey of CAR 27 running from north to south. Notes show approximate corner being in intersection of town road west and fence line east. Stationing gives distances of 2699.3 feet to the NE corner and 2661.5 feet to the SE corner.

2008 The County Surveyor's Office searched and found a ½" iron pipe below centerline intersections of a north-south road (155th Ave. NE) and a road to the west (100th St. NE). Comparing distances to the NE Cor. and the SE Cor. gives agreeable results with those reported in 1938 (2694.38 ft. & 2664.65 ft., respectively). Comparing the distance to the E ¼ Cor. of Sec. 7 gives 5202.38 ft. (78.82 ch.) which agrees with Parent's distance in 1892 of 79.06 ch. The position fits an old occupation line to the east and is accepted as the best evidence. Ties were made.

County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-156462.439
 E-547349.224